



APPLICATIONS

The check valves, shown in this chapter, are classified "Pressure accessories" in the sense of the Pressure Equipment Directive 97/23/EC, Article 1, Section 2.1.4 and are subject of Article 3, Section 1.3 of the same Directive.

They are designed for installation on commercial refrigerating systems and on civil and industrial conditioning plants, which use the following refrigerant fluids: R22, R134a, R404A, R407C, R410A; R507 proper to the Group II (as defined in Article 9, Section 2.2 of Directive 97/23/EC and referred to in Directive 67/548/EEC). For specific applications with refrigerant fluids not listed above, always proper to the Group II, please contact Castel Technical Department.

Check valves series 3112, 3132 and 3133 are approved by Underwriters Laboratories Inc. of the United States according to UL 207 Standard.

MATERIALS

The main parts of the valves are made with the following materials:

- Hot forged brass EN 12420 - CW 617N for body and cover
- Copper tube EN 12735-1 - Cu-DHP for solder connections
- Austenitic stainless steel AISI 302 for the spring
- Chloroprene rubber (CR) for outlet seal gaskets. Metal-rubber laminated gaskets for the valves series 3122, 3142 and 3182
- P.T.F.E. for seat gasket

INSTALLATION

The valves can be installed in any section of a refrigerating system, where it is necessary to avoid an inversion of the refrigerating flow, in compliance with the limits and capacities indicated in table 2. Table 1 shows the following functional characteristics of a check valve.

- PS
- TS
- Kv factor
- Minimum opening pressure differential, which is the minimum pressure differential between inlet and outlet at which a check valve can open and stay opened.

Before connecting the valve to the pipe it is advisable to make sure that the refrigerating system is clean. In fact the valves with P.T.F.E. gaskets are particularly sensitive to dirt and debris. Furthermore check that the flow direction in the pipe corresponds to the arrow stamped on the body of the valve.

The allowed operating positions are:

types 3122 and 3142 with horizontal axis and valve cover facing upward

types 3182 with inlet facing down and the valve cover facing upward

types 3112, 3132 and 3133 preferably with vertical axis and arrow upward. Sloping axis, up to horizontal position, are tolerable.

The brazing of valves with solder connections should be carried out with care, using a low melting point filler material. Before starting to braze, it's necessary to disassemble the valves series 3122, while this operation is not necessary with solder connection valves. In any case, to avoid direct contact between the torch flame and the valve body, which could be damaged and compromise the proper functioning of the valve.

TABLE 1: General Characteristics

Catalogue Number	Connections					Kv Factor [m ³ /h]	Minimum Opening Pressure Differential [bar]	PED Directive								
	SAE Flare	ODS		ODM				TS [°C]		PS [bar]	Risk Category					
		Ø [in.]	Ø [mm]	Ø [in.]	Ø [mm]			min.	max.							
3112/2	1/4"					0.5	0.1	- 40	+105	45	Art. 3.3					
3112/3	3/8"					1.5										
3112/4	1/2"	-	-	-	-	1.8										
3112/5	5/8"					3.3										
3112/6	3/4"					5.0										
3122/M22		-	22	-	28	6.6						0.1	- 35	+160	45	Art. 3.3
3122/7		7/8"	-	1.1/8"	-	6.6										
3122/M28		-	28	1.3/8"	35	8.8										
3122/9		1.1/8"	-	1.3/8"	35	8.8										
3122/11		1.3/8"	35	1.5/8"		15.2										
3122/13		1.5/8"	-	2"		25.0										
3122/M42		-	42	2"		40.0										
3122/17		2.1/8"	54			40.0										
3132/2		1/4"	-			0.5	0.1	- 40	+105	45	Art. 3.3					
3132/3		3/8"	-			1.5										
3132/M10		-	10			1.8										
3132/M12		-	12			3.3										
3132/4		1/2"	-			5.0										
3132/5		5/8"	16			5.0										
3132/M18		-	18			6.6										
3132/6		3/4"	-			8.8										
3132/7		7/8"	22			15.2										
3133/M10		-	10			25.0										
3133/M12		-	12			25.0	0.1	- 40	+105	45	Art. 3.3					
3133/5		5/8"	16			1.5										
3133/7		7/8"	22			1.8										
3142/7		7/8"	22			3.3										
3142/M28		-	28			5.0										
3142/9		1.1/8"	-			6.6										
3142/11		1.3/8"	35			8.8										
3142/13		1.5/8"	-			15.2										
3142/M42		-	42			25.0										
3142/17		2.1/8"	54			40.0										
3142/21		2.5/8"	-			40.0	0.1	- 35	+160	45	Art. 3.3					
3142/25		3.1/8"	-			40.0										
3182/7		7/8"	22			8.5										
3182/M28		-	28			8.5										
3182/9		1.1/8"	-			9.5										
3182/11		1.3/8"	35			19.0										
3182/13		1.5/8"	-			37.0										
3182/M42		-	42			37.0										
3182/17		2.1/8"	54			45.4										

3775

TABLE 3: Refrigerant Flow Capacity [kW]

Catalogue Number	Liquid line						Suction line						Hot Gas line					
	R134a	R22	R404A	R407C	R410A	R507	R134a	R22	R404A	R407C	R410A	R507	R134a	R22	R404A	R407C	R410A	R507
3112/2	8.5	9.2	6.0	8.6	8.6	5.8	0.9	1.3	1.1	1.1	1.5	1.1	4.3	5.4	4.8	5.8	6.8	4.8
3112/3	25.5	27.5	17.9	25.8	25.8	17.3	2.8	3.8	3.3	3.4	4.5	3.3	12.8	16.2	14.4	17.4	20.4	14.3
3112/4	30.6	32.9	21.4	31.0	30.9	20.7	3.4	4.6	4.0	4.1	5.4	4.0	15.3	19.4	17.3	20.9	24.5	17.2
3112/5	56.1	60.4	39.3	56.9	56.7	38.0	6.2	8.4	7.4	7.5	9.9	7.4	28.1	35.6	31.7	38.3	44.9	31.5
3112/6	85.0	91.5	59.5	86.2	85.9	57.5	9.5	12.8	11.2	11.4	15.0	11.2	42.5	54.0	48.0	58.1	68.0	47.7
3122/M22	112.2	120.8	78.5	113.7	113.3	75.9	12.5	16.8	14.7	15.0	19.8	14.7	56.1	71.3	63.4	76.7	89.8	63.0
3122/7																		
3122/M28	149.6	161.0	104.7	151.6	151.1	101.2	16.6	22.4	19.6	20.0	26.4	19.6	74.8	95.0	84.5	102.3	119.7	84.0
3122/9																		
3122/11	258.4	278.2	180.9	261.9	261.0	174.8	28.7	38.8	33.9	34.5	45.6	33.9	129.2	164.2	145.9	176.6	206.7	145.0
3122/13	425.0	457.5	297.5	430.8	429.3	287.5	47.3	63.8	55.8	56.8	75.0	55.8	212.5	270.0	240.0	290.5	340.0	238.5
3122/M42																		
3122/17	680.0	732.0	476.0	689.2	686.8	460.0	75.6	102.0	89.2	90.8	120.0	89.2	340.0	432.0	384.0	464.8	544.0	381.6
3132/2	8.5	9.2	6.0	8.6	8.6	5.8	0.9	1.3	1.1	1.1	1.5	1.1	4.3	5.4	4.8	5.8	6.8	4.8
3132/3	25.5	27.5	17.9	25.8	25.8	17.3	2.8	3.8	3.3	3.4	4.5	3.3	12.8	16.2	14.4	17.4	20.4	14.3
3132/M10																		
3132/M12	30.6	32.9	21.4	31.0	30.9	20.7	3.4	4.6	4.0	4.1	5.4	4.0	15.3	19.4	17.3	20.9	24.5	17.2
3132/4																		
3132/5	56.1	60.4	39.3	56.9	56.7	38.0	6.2	8.4	7.4	7.5	9.9	7.4	28.1	35.6	31.7	38.3	44.9	31.5
3132/M18	85.0	91.5	59.5	86.2	85.9	57.5	9.5	12.8	11.2	11.4	15.0	11.2	42.5	54.0	48.0	58.1	68.0	47.7
3132/6																		
3132/7	25.5	27.5	17.9	25.8	25.8	17.3	2.8	3.8	3.3	3.4	4.5	3.3	12.8	16.2	14.4	17.4	20.4	14.3
3133/M10	30.6	32.9	21.4	31.0	30.9	20.7	3.4	4.6	4.0	4.1	5.4	4.0	15.3	19.4	17.3	20.9	24.5	17.2
3133/M12	56.1	60.4	39.3	56.9	56.7	38.0	6.2	8.4	7.4	7.5	9.9	7.4	28.1	35.6	31.7	38.3	44.9	31.5
3133/5	85.0	91.5	59.5	86.2	85.9	57.5	9.5	12.8	11.2	11.4	15.0	11.2	42.5	54.0	48.0	58.1	68.0	47.7
3133/7	112.2	120.8	78.5	113.7	113.3	75.9	12.5	16.8	14.7	15.0	19.8	14.7	56.1	71.3	63.4	76.7	89.8	63.0
3142/7	149.6	161.0	104.7	151.6	151.1	101.2	16.6	22.4	19.6	20.0	26.4	19.6	74.8	95.0	84.5	102.3	119.7	84.0
3142/M28																		
3142/9	258.4	278.2	180.9	261.9	261.0	174.8	28.7	38.8	33.9	34.5	45.6	33.9	129.2	164.2	145.9	176.6	206.7	145.0
3142/11	425.0	457.5	297.5	430.8	429.3	287.5	47.3	63.8	55.8	56.8	75.0	55.8	212.5	270.0	240.0	290.5	340.0	238.5
3142/M42																		
3142/17	680.0	732.0	476.0	689.2	686.8	460.0	75.6	102.0	89.2	90.8	120.0	89.2	340.0	432.0	384.0	464.8	544.0	381.6
3142/21	144.5	155.6	101.2	146.5	145.9	97.8	16.1	21.7	19.0	19.3	25.5	19.0	72.3	91.8	81.6	98.8	115.6	81.1
3142/25																		
3182/7	161.5	173.9	113.1	163.7	163.1	109.3	18.0	24.2	21.2	21.6	28.5	21.2	80.8	102.6	91.2	110.4	129.2	90.6
3182/M28	323.0	347.7	226.1	327.4	326.2	218.5	35.9	48.5	42.4	43.1	57.0	42.4	161.5	205.2	182.4	220.8	258.4	181.3
3182/9																		
3182/11	629.0	677.1	440.3	637.5	635.3	425.5	69.9	94.4	82.5	84.0	111.0	82.5	314.5	399.6	355.2	429.9	503.2	353.0
3182/M42	771.8	830.8	540.3	782.2	779.5	522.1	85.8	115.8	101.2	103.1	136.2	101.2	385.9	490.3	435.8	527.5	617.4	433.1
3182/17																		

3775

Standard rating conditions according to AHRI Standard 760-2007


Condensing temperature	110 °F	(43,3 °C)
Liquid temperature	100 °F	(37,8 °C)
Subcooling	10 °R	(5,5 °K)
Evaporating temperature	40 °F	(4,4 °C)
Suction temperature	65 °F	(18,3 °C)
Superheating	25 °R	(13,9 °K)
Discharge temperature	160 °F	(71,1 °C)

TABLE 2: Dimensions and Weights


Catalogue Number	Dimensions [mm]							Weight [g]												
	H	H ₁	L	L ₁	Q	Ø D	Ch													
3112/2	56	-	-		-	19	16	86												
3112/3	68					23	20	131												
3112/4	73					25	22	166												
3112/5	85					29	25	242												
3112/6	98					36	32	400												
3122/M22	84.5	28.5	100		60			1180												
3122/7								1090												
3122/M28																				
3122/9																				
3122/11	101.5	34	118	-	68	-	-	1625												
3122/13	125.5	37	141		88			2955												
3122/M42					104			4225												
3122/17	142	42.5	173		104			4225												
3132/2	92	-	-		-			-	19	111										
3132/3	107								23	131										
3132/M10									132	25	171									
3132/M12	139									29	232									
3132/4									165	36	360									
3132/5	107											23	131							
3132/M18				132		25	171													
3132/6	139					29	232													
3132/7				165		36	360													
3133/M10	107					23	131													
3133/M12	132	25	171																	
3133/5	139	29	232																	
3133/7	165	36	360																	
3142/7	84.5	28.5	170	-	60	-	-	1320												
3142/M28			201																	
3142/9			101.5						34	232	68	1885								
3142/11											125.5	37	256	88	3315					
3142/13			142						42.5	285				104	-	-	4875			
3142/M42											329	5690								
3142/17													1280							
3182/7			151						95	130.5	100.5	60	-	-	1295					
3182/M28															177	109.5	150	116	68	1855
3182/9																				
3182/11	4780																			
3182/13																				
3182/M42																				
3182/17																				

3775


3132
3133

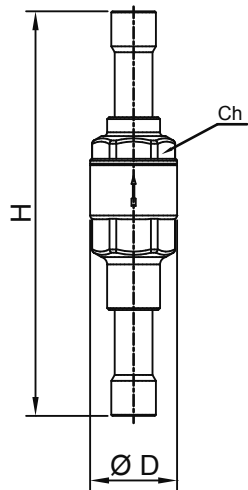


3112



3142

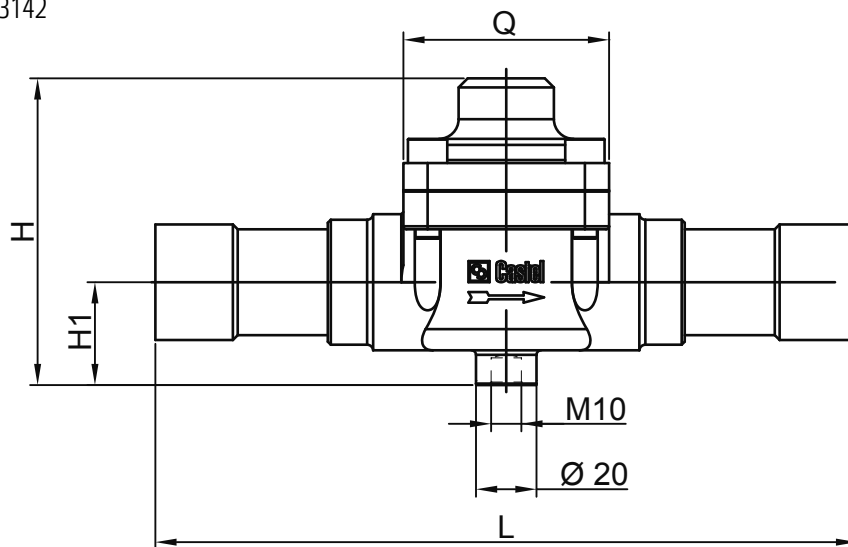

3182

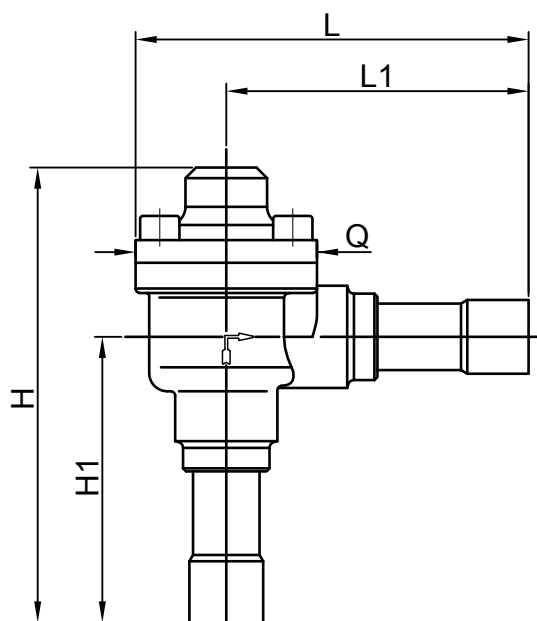

3122 **3775**

