


1.1/8" - 18UNEF

Ø22




SW36




SG-2.1/4_Ø38

SG-1.3/4_Ø27



**SG-134
SG-214**

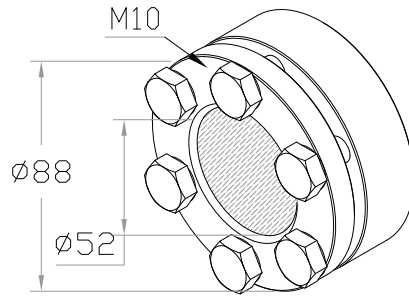

SG-80



SIGHT GLASSES ;

- * Used to control level of liquid and oil.
- * SW36, SG-1 3/4" and SG-2 1/4" sight glasses have a ball inside them in order to make it easier to see oil/liquid level.
- * There is no ball in model DN80.
- * Sight glasses provided in standard products may be changed with any model of sight glasses that you wish.

GÖZETLEME CAMLARI ;

- * Likit ve Yağ seviyelerini kontrol amaçlı kullanılmaktadırlar.
- * SW36, SG-1 3/4" ve SG-2 1/4" Gözetleme camları içerisinde yağ/likit seviyesini daha rahat görebilmeniz için top bulunmaktadır.
- * DN80 modelinde top yoktur.
- * Standart ürünlerimizde belirtmiş olduğumuz gözetleme camlarını istemiş olduğunuz her model gözetleme camı ile değişiklik yapabilirsiniz.

СМОТРОВЫЕ СТЕКЛА;

- * Используются для контроля уровня жидкости и масла.
- * В смотровых стеклах SW36, SG-1 3/4" и SG-2 1/4" находится специальный шарик для более наглядного определения уровня масла/жидкости.
- * В модели DN80 шарик отсутствует.
- * Мы можем заменить указанную модель смотрового стекла на наших стандартных сосудах на необходимую по Вашему желанию.

Parameters

Ts [°C]	-10°C +120°C
Ps [bar]	42 bar
Ts [°C]	-50°C -10°C
Ps [bar]	23 bar
Media r	Refrigerant pursuant to EN 378-1