


SISTEMA DI FISSAGGIO  
FIXING SYSTEM

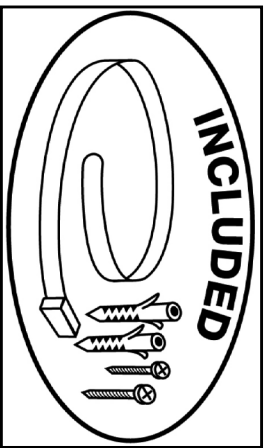

**INCLUDED**

ACCESSORI / ACCESSORIES

DATI TECNICI - TECHNICAL DATA

SCALA RANGE:	-35+35°C
DIFFERENZIALE / DIFFERENTIAL:	3 ± 2°C
TOLL. VALORI F.S.	± 3°C
CAPILLARE / CAPILLARY:	MM 1500 RAME NICHIELATO / NICKEL PLATED OR INOX CAPILLARY
INVOLUCRO / MANOPOLA / CASE:	LIGHT BLUE PANTONE 2995C
SERIGRAFIA / DIAL:	RED KNOB - WHITE NUMBERS
PORTATA CONTATTI / BREAKING CAPACITY:	C1 2,5(0,6) A 400VAC / C2 15(3) A 400VAC
MINIMUM CORRENT:	200 mA
INSULATION RESISTANCE:	>100 M ohm
TEST DI VITA / LIFE OF PRODUCT:	100.000 CICLI / CYCLES
MAX °C SOPP. CORPO / MAX °C CASE	70°C
GRADO TENUTA / IP GRADE:	IP 4.0

MODIFICA

DOC.RIF. DATA

APPARECCHIO  
ASSIEME

PARTICOLARE  
ARTH093

**ARTHERMO**

DESIGNATO A. SALA  
SCALA 1:1

APPROVATO SALA A.  
DATA 11/11/2011

MATERIALE

TRATTAMENTO

NOTE

CODICE

ARTH093