


Unidades condensadoras serie LKPG LKPG series Condensing Unit

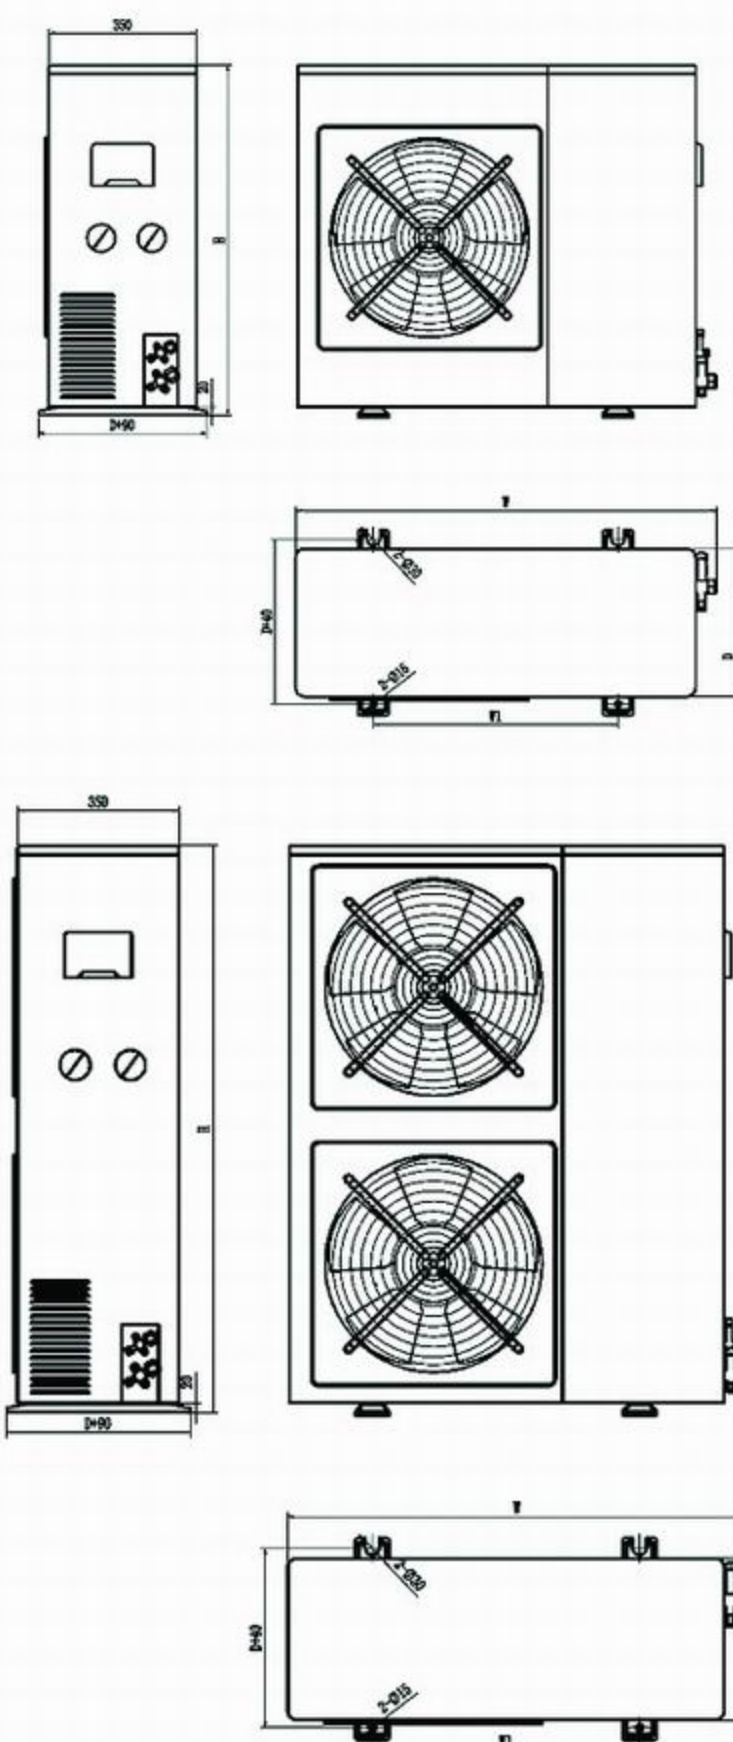

Modelo / Model classification:
LKPG 200 S

S: Trifásico (ninguno: Una fase) / S: three (none: single phase)
Potencia nominal / Nominal Power * 100 (HP)
serie / series

Unidades condensadoras serie LKPG LKPG series Condensing Unit

Tecumseh Hermético R22 para Media & Alta Temperatura / Hermetic R22 for Medium & High Temperature

Modelo Model	Compresor Compressor		Voltaje Voltage (V-Ph-Hz)	Rendimiento Performance(W)					Conexiones Pipes		Nivel de sonido Sound Level	Ventiladores Axiales Axial Fans	Dimensiones Dimensions (mm)		
				Temperatura de Evaporación Evaporating Temperature(℃)											
	Modelo Model	Hp		-15	-10	-5	0	7.2	Aspiración Suction	Líquido Lidquid			10m(dBA)	N°×Φmm	L
LKPG200	FH4524F	2	220-1-50	1841	2456	3219	4131	5706	1/2"	5/8"	39	1×400	800	300	680
LKPG200S	TFH4524F	2	380-3-50	1841	2456	3219	4131	5706	1/2"	5/8"	39	1×400	800	300	680
LKPG300S	TFH4540F	3	380-3-50	3000	4301	5745	7330	9863	1/2"	7/8"	39	1×450	950	360	830
LKPG400S	TAG4546T	4	380-3-50	3103	4368	5934	7839	11253	5/8"	7/8"	42	2×450	950	360	1230
LKPG500S	TAG4561T	5	380-3-50	4465	6133	8164	10593	14870	5/8"	7/8"	43	2×450	950	360	1230
LKPG600S	TAG4568T	6	380-3-50	5157	6967	9180	11862	15730	5/8"	7/8"	43	2×450	950	360	1230
LKPG700S	TAG4573T	7	380-3-50	5629	7501	9804	12632	17816	5/8"	7/8"	43	2×450	950	360	1230

Condiciones de prueba: Temperatura ambiente: 32°C, Temperatura de Condensación: 45°C / Test Condition: Ambient Temperature: 32°C, Condensing Temperature: 45°C

Tecumseh Hermético R404A para Baja Temperatura / Hermetic R404A for Low Temperature

Modelo Model	Compresor Compressor		Voltage Voltage (V-Ph-Hz)	Rendimiento Performance(W)					Conexiones Pipes		Nivel de sonido Sound Level	Ventiladores Axiales Axial Fans	Dimensiones Dimensions (mm)		
				Temperatura de Evaporación Evaporating Temperature(℃)											
	Modelo Model	Hp		-35	-30	-23.3	-15	-10	Aspiración Suction	Líquido Lidquid			10m(dBA)	N°×Φmm	L
LKPG200S	TFH2480Z	2	380-3-50	738	1319	2183	3476	4419	1/2"	5/8"	39	1×400	800	300	680
LKPG300S	TFH2511Z	3	380-3-50	1380	2016	3135	4931	6222	1/2"	5/8"	39	1×450	950	360	830
LKPG500S	TAG2516Z	5	380-3-50	1743	2704	4356	7043	9038	5/8"	7/8"	42	2×450	950	360	1230
LKPG700S	TAG2522Z	7	380-3-50	2378	3542	5522	8711	11062	5/8"	7/8"	43	2×450	950	360	1230

Condiciones de prueba: Temperatura ambiente: 32°C, Temperatura de Condensación: 45°C / Test Condition: Ambient Temperature: 32°C, Condensing Temperature: 45°C

Copeland Voluta R22 para Media & Alta Temperatura / Scroll R22 for Medium & High Temperature

Modelo Model	Compresor Compressor		Voltaje Voltage (V-Ph-Hz)	Rendimiento Performance(W)					Conexiones Pipes		Nivel de sonido Sound Level	Ventiladores Axiales Axial Fans	Dimensiones Dimensions (mm)		
				Temperatura de Evaporación Evaporating Temperature(℃)											
	Modelo Model	Hp		-12	-10	-5	0	5	Aspiración Suction	Líquido Lidquid			10m(dBA)	N°×Φmm	L
LKPG200	ZB15KQ-PFJ	2	220-1-50	3300	3550	4350	5200	6250	1/2"	3/4"	33	1×400	800	300	680
LKPG200S	ZB15KQ-TFD	2	380-3-50	3300	3550	4350	5200	6250	1/2"	3/4"	33	1×400	800	300	680
LKPG300S	ZB21KQ-TFD	3	380-3-50	4650	5050	6200	7450	8850	1/2"	3/4"	39	1×450	950	360	830
LKPG400S	ZB29KQ-TFD	4	380-3-50	6230	6790	8290	9970	11880	1/2"	7/8"	42	2×450	950	360	1230
LKPG500S	ZB38KQ-TFD	5	380-3-50	7300	8000	9950	12200	14650	1/2"	7/8"	43	2×450	950	360	1230
LKPG600S	ZB45KQ-TFD	6	380-3-50	9400	10200	12400	14900	17800	1/2"	7/8"	43	2×450	950	360	1230
LKPG700S	ZB48KQ-TFD	7	380-3-50	10390	11285	13700	16436	19574	5/8"	7/8"	43	2×450	950	360	1230

Condiciones de prueba: Temperatura ambiente: 32°C, Temperatura de Condensación: 40°C / Test Condition: Ambient Temperature: 32°C, Condensing Temperature: 40°C

Copeland Voluta R404A para Media & Alta Temperatura / Scroll R404A for Medium & High Temperature

	Modelo Model	Compresor Compressor		Voltaje Voltage (V-Ph-Hz)	Rendimiento Performance(W)					Conexiones Pipes		Nivel de sonido Sound Level	Ventiladores Axiales Axial Fans	Dimensiones Dimensions (mm)		
					Temperatura de Evaporación Evaporating Temperature(℃)											
		Modelo Model	Hp		-15	-10	-5	0	5	Aspiración Suction	Líquido Lidquid			10m(dBA)	N°×Φmm	L
7983	LKPG200	ZB15KQE-PFJ	2	220-1-50	3000	3700	4450	5350	6350	1/2"	3/4"	33	1×400	800	300	680
	LKPG200S	ZB15KQE-TFD	2	380-3-50	3000	3700	4450	5350	6350	1/2"	3/4"	33	1×400	800	300	680
	LKPG300S	ZB21KQE-TFD	3	380-3-50	4550	5500	6600	7900	9350	1/2"	3/4"	39	1×450	950	360	830
7984	LKPG400S	ZB29KQE-TFD	4	380-3-50	6160	7460	8960	10680	12650	1/2"	7/8"	42	2×450	950	360	1230
	LKPG500S	ZB38KQE-TFD	5	380-3-50	7700	930	11200	13350	15800	1/2"	7/8"	43	2×450	950	360	1230
	LKPG600S	ZB45KQE-TFD	6	380-3-50	9050	10950	13150	15700	186600	1/2"	7/8"	43	2×450	950	360	1230
	LKPG700S	ZB48KQE-TFD	7	380-3-50	9969	12074	14500	17287	20471	5/8"	7/8"	43	2×450	950	360	1230

Condiciones de prueba: Temperatura ambiente: 32°C, Temperatura de Condensación: 40°C / Test Condition: Ambient Temperature: 32°C, Condensing Temperature: 40°C