




CompAir


S0350 CR43_G030W04

	1-230V ± 10%		3-400V ± 10%	
	50Hz	60Hz	50Hz	60Hz
P1 (kW)	0.155	0.200	0.180	0.240
I (A)	0.85	1.00	0.50	0.55
s (mm ²)	1360	1560	1380	1560
C _{conv} (μF)	3.5	3.5	-	-
t _h (°C)	60	40	60	40



Point	U (V)	I (A)	P ₁ (kW)	n (rpm)	L _{tot} (dB)
(2)	230	0.83	104	1319	68
(3)	230	0.78	134	1362	70
(5)	400	0.48	179	1266	69
(6)	400	0.48	158	1380	71

Point	U (V)	I (A)	P ₁ (kW)	n (rpm)	L _{tot} (dB)
(8)	230	0.97	200	1428	72
(9)	230	0.90	184	1295	75
(11)	400	0.52	233	1472	76
(12)	400	0.50	206	1538	73

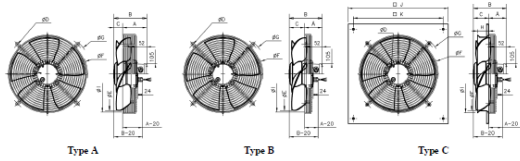

Dimensions (mm)	A	B	C	D	E	F	G	H	I	J	K	Weight
Type A	118	158	40	410 / 422	350	388	443	-	372	-	-	MB 5.5 kg
Type B	87	158	71	410 / 422	350	300	440	-	374	-	-	MB 5.5 kg
Type C	87	158	71	410 / 422	350	300	440	55	374	485	435	MB 7.5 kg

Type	1-230V / 50Hz	3-400V / 50Hz	1-230V / 60Hz	3-400V / 60Hz
Type A	03985 / 036217	03985 / 036217	03984 / 036475	03984 / 036475
Type B	03981 / 039664	03981 / 039664	03980 / 039664	03980 / 039664
Type C	03989 / 039718	03989 / 039718	-	-