




CompAir

S0400 CR46_G050W04




		1~230V ± 10%		3~400V ± 10%	
		50Hz	60Hz	50Hz	60Hz
P1 (kW)		0.270	-	0.275	0.380
I (A)		1.35	-	0.65	0.75
n (min ⁻¹)		1340	-	1350	1460
C _{conv} (μF)		5	-	-	-
t _h (°C)		60	-	60	40



Point	U (V)	I (A)	P ₁ (kW)	n (min ⁻¹)	L _{WA} (dB(A))
(1)	230	1.32	268	1344	71
(2)	230	1.13	225	1340	74
(3)	400	0.61	234	1300	71
(4)	400	0.50	234	1340	74

Point	U (V)	I (A)	P ₁ (kW)	n (min ⁻¹)	L _{WA} (dB(A))
(5)	230	-	-	-	-
(6)	230	-	-	-	-
(11)	400	0.73	380	1302	72
(12)	400	0.70	381	1419	75

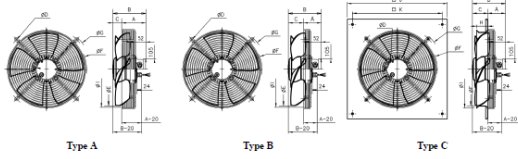

Dimensions [mm]	A	B	C	D	E	F	G	H	I	J	K	M	N
Type A	138	178	40	470	363	436	493	-	420	-	-	M8	6.0 kg
Type B	87	178	91	502	383	468	525	-	452	-	-	M8	6.0 kg
Type C	87	178	91	502	383	468	525	80	452	540	400	M8	8.7 kg

Type	1~230V 50 Hz	3~400V 50 Hz	3~400V 60 Hz
Type A	029399 030519	030672 030696	030822 031159
Type B	029396 030518	030671 030695	030821 031149
Type C	029400 029618	030670 030694	- -
	029395 029619	030669 030693	- -