

## Condensate Removal Pumps

# ABS SERIES Shallow-Pan Tank

3-ABS



### Applications

- For condensate removal

### Features

- 1/2 hp oil filled motor
- Epoxy coated cast aluminum housing and motor cover
- Galvanized steel tank cover
- ABS tank
- 1 gallon capacity
- Nylon volute
- Stainless steel shaft
- Thermal overload protection
- 1/2" MNPT discharge with brass check valve for 1/2" OD (12.7 mm), rigid plastic or copper
- Viton® shaft seal
- Advanced mechanical switch
- Thermal overload protection


### Series Specifications

**Capacity:** 310 gph @ 1' (1173 lph @ 0.31 m)  
**Shut Off:** 26' (7.9 m)  
**Liquid Temperature:** 120 °F (49 °C)  
**Discharge:** 1/2" MNPT (12.7 mm)  
**Impeller:** Nylon

**Electrical:** 115 V, 60 Hz, 3.5A  
 230 V, 50/60 Hz, 1.8/1.6A  
**Operation:** Automatic

### Model Characteristics

Item #	Model	Volts	Cord		On Level	Off Level		
			9'	2.8 m	4.25"	10.8 cm	3.25"	8.3 cm
551320	3-ABS	115						
551330	3-ABS	230	11'	3.4 m	4.25"	10.8 cm	3.25"	8.3 cm

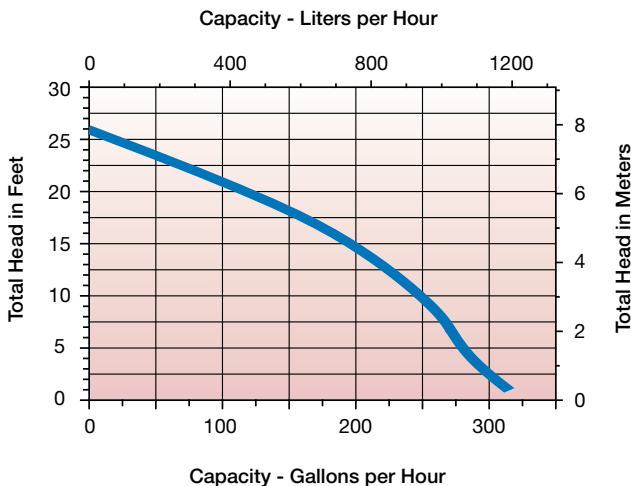

# EC SERIES Mini-Split/Ductless

EC-400



### Applications

- Removes condensate from ductless mini split wall mount air conditioners and fan coils

### Features

- For intermittent operation, maximum 50% duty cycle
- Condensate produced in application must be no more than half the pump's flow rate for any given head
- Use with most mini-split air conditioning units up to 25,000 BTU/hr
- Self-priming pump can be placed up to 3' (.9 m) above reservoir
- Includes safety switch, suction tubing (3" x 5/32" ID) [76.2 mm x 3.96 mm], vent tubing (8" x 5/32" ID) [20.3 cm x 3.96 cm], drain tubing (3" x 1/2" ID) [76.2 mm x 12.7 mm] and tubing adapter (5/32" x 1/4" ID) [3.96 mm x 6.3 mm]

### Series Specifications

**Capacity:** 2.5 gph @ 1' (9.5 lph @ 0.31 m)  
**Shut Off:** 35' (10.7 m)  
**Electrical:** 115 V, 60 Hz, 0.24A  
 230 V, 60 Hz, 0.1A  
**Operation:** Automatic

### Model Characteristics

Item #	Model	Volts
553458	EC-400	230
553455	EC-400	115

