


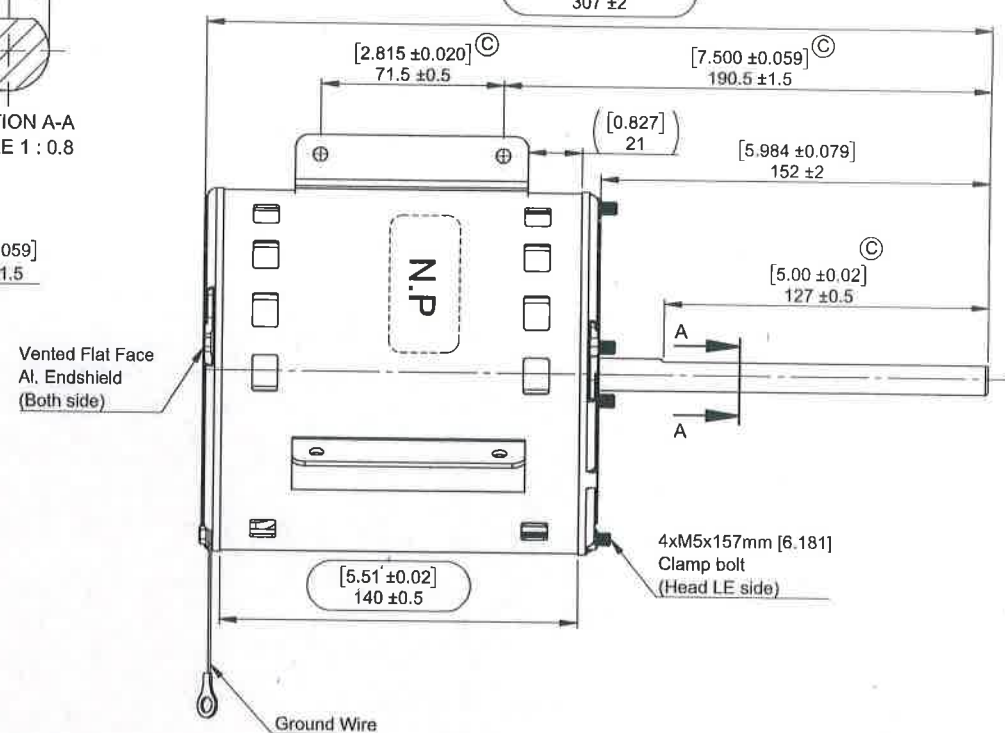
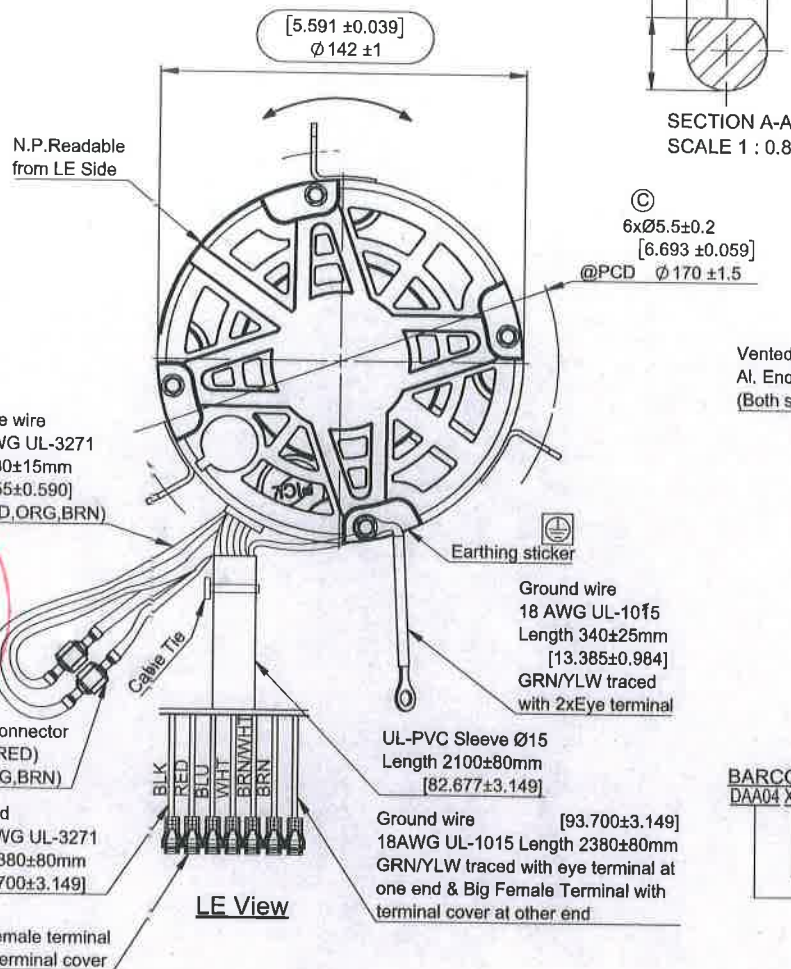


DO NOT SCALE THE DRAWING
ALL DIM. ARE IN mm.

	5	4	3	2	1	
OVER 1000 UP TO 2000	OVER 400 UP TO 1000	OVER 120 UP TO 400	OVER 30 UP TO 120	OVER 6 UP TO 30	OVER 3 UP TO 6	OVER 0.5 UP TO 3
±3.0	±2.0	±1.2	±0.8	±0.5	±0.3	±0.2
GENERAL TOLERANCE AS PER IS: 2102 COARSE						CUSTOMER

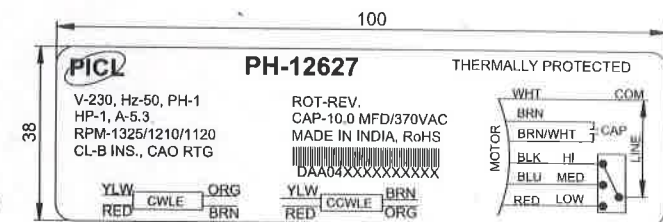

MOTOR SR. NO.
YEAR OF MFG.
MONTH OF MFG.
PICL PREFIX



Notes:

1. All material should be RoHS compliance.
2. Name plate protected by protective film.
3. Shaft should be treated with anti rust oil.
4. Inspection Dim. apart from CTQ for PICL.
5. Therad locker to be used on all clamp bolt thread without spring washer.
6. **This motor is in ball bearing.**

2023	DATE	NAME	SIGN.	MAT.		FINISH
DGN	06-12-2024	N.S	<i>[Signature]</i>	 PICL <i>PICL (INDIA) PVT. LTD.</i> <i>FARIDABAD</i>		
ELE. DGN	06-12-2024	P.K	<i>[Signature]</i>			
CHD	06-12-2024	A.V	<i>[Signature]</i>			
TEAM LEAD	06-12-2024	M.V	<i>[Signature]</i>			
APD	06-12-2024	B.C	<i>[Signature]</i>			
SCALE			<i>[Signature]</i>			

TITLE

PH-12627

(Ref:-SMP_412M3H6053-1)

[illegible]

NOTE:-

THIS DRAWING IS THE PROPERTY OF M/S PICL (INDIA) PRIVATE LTD. FARIDABAD. IT MUST NOT BE USED DIRECTLY OR INDIRECTLY IN ANY WAY, DETRIMENTAL TO THE INTEREST OF THE COMPANY.

Length 230
[9.055
(YLW,RED

Controlled
Copy
If Stamp is
RED.

Reversible code
Male (YLW,RI