




1



GR45C-ZIK.GG.CR | 116843/A01 | Portfolio STD-WW | Cpro ECblue

### Standard design with ECblue motor and integrated electronics

#### Material of impeller:

- ZAmid - high performance composite material

#### Color Coating:

- Color coating in RAL5002 (Ultra marine-blue)

#### Mains voltage motor size B\_:

- 1~ 200...277 V; 50/60 Hz

#### Mains voltage motor size D\_:

- 1~ 200...277 V; 50/60 Hz
- 3~ 200...240 V; 50/60 Hz
- 3~ 380...480 V; 50/60 Hz

#### Mains voltage motor size G\_:

- 3~ 200...240 V; 50/60 Hz
- 3~ 380...480 V; 50/60 Hz

#### Thermal class:

- THCL155

#### Thermal protection:

- Protection with active temperature management

#### Protection:

- IP55

#### Coating:

- Motor painted in RAL5002 (Ultra marine-blue)

#### Controller (only motor size B\_):

- Activation via external speed setting 0-10 V / PWM, Communication interface on request
- Standard cable length: 60 cm

#### Controller (only motor size D\_, G\_):

# FANselect



- **BASIC:**

Activation via external speed setting 0-10 V / PWM Art. no. ER- and GR-module  
in basic version

- **PREMIUM:**

Integrated control functionality, Communication interface on request

**Cable glands:**

- Motor size D: 3 x M16 x 1.5
- Motor size G: 3 x M20 x 1.5

**Ambient temperature:**

- Minimum permissible ambient temperature: -20 °C\*
- Maximum permissible ambient temperature: 40 °C or see data sheet

**\*Continuous operation with occasional starts (S1) according to DIN EN 60034-1: 2011-02. Occasional starting between -35 ° C and -25 ° C is permissible. Permanent operation below -25 ° C only possible with special bearings for refrigeration applications on request.**



## fan data

15/12/2021

version FANselect V 1.01 (211209), AMCA V 1.03 September, 2021 / 1.21.12.09 | 53567 | (user ZAFS43567)



type	GR45C-ZIK.GG.CR
article no.	116843/A01   Portfolio STD-WW

## technical data

motor	ECblue	
Efficiency class	IE5	
mains supply	-	3~ 400V 50Hz
ambient temperature, max. limit ( $t_r$ )	°C	40
efficiency grade $\eta_{statA}$	%	63,3
efficiency grade $N_{actual}$   $N_{target}$		<b>66,3</b>   62
ErP-conformity		2015   EC controller integrated
grille   influence		no

## fan data

<b>SFP-class</b>   SFP-value ( $P_{SFP}$ )	-   $Ws/m^3$	<b>4</b>   1536
airflow volume ( $q_v$ )	$ft^3/min$	6268.9
air velocity	$ft/s$	50.83
pressure, <b>stat.</b> ( $p_{sF}$ )   tot. ( $p_F$ )	in.wg.	<b>2.995</b>   3.565
electrical power input ( $P_{sys}$ )	W	4544
system eff., <b>stat.</b> ( $\eta_{sF,sys}$ )   tot. ( $\eta_{F,sys}$ )	%	<b>48.6</b>   57.8
fan speed ( <b>n</b> )   max. ( $n_{max}$ )	rpm	<b>2568</b>   2570
fan speed, set value ( $\%n_{max}$ )	%	100
frequency ( <b>f<sub>BP</sub></b> )   ( $f_{max}$ )	Hz	<b>50</b>   60
voltage ( $U_{DP}$ )	V	400
current ( $I_{DP}$ )	A	6.88
acoustics, suction side ( $L_{w(A),5}$ )   ( $L_{w,5}$ )	dB	<b>93</b>   96
acoustics, pressure side ( $L_{w(A),6}$ )   ( $L_{w,6}$ )	dB	<b>99</b>   101
dimensions (w x h x d)	in	23.62 x 23.62 x 15.63
product weight ( $m_{pr}$ )	lb	90.4
k-factor nozzle pres. (k)	-	197
differential pres. nozzle ( $p_{sF \text{ nozzle}}$ )	Pa	2923

PF:PF\_50; Ano:116843; STot:+-10 %




# FANselect




performance curve / acoustics 15/12/2021  
 version FANselect V 1.01 (211209), AMCA V 1.03 September, 2021 / 1.21.12.09 | 53567 | (user ZAFS43567)

**1 GR45C-ZIK.GG.CR** measured in standard nozzle in installation type A according to ISO 5801  
 116843/A01 | Portfolio measurement density 0.072 [lbs/ft<sup>3</sup>]  
 STD-WW


## air performance p<sub>sF</sub>

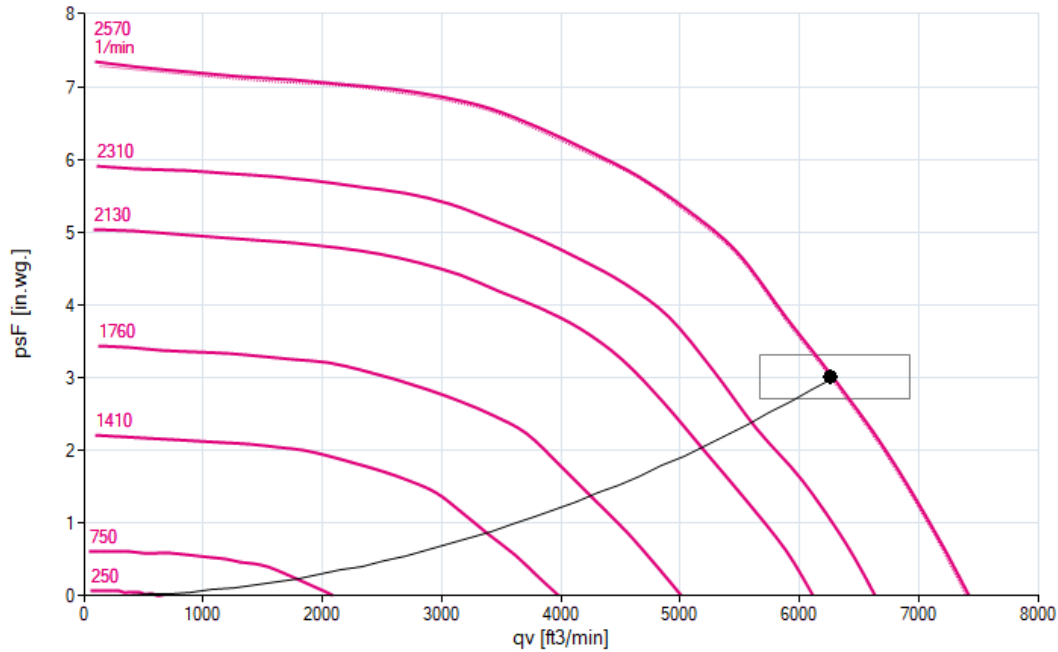

## acoustics (L<sub>w(A),5</sub>)

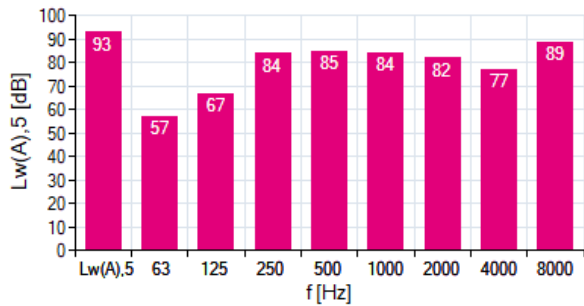

## acoustics (L<sub>w(A),6</sub>)

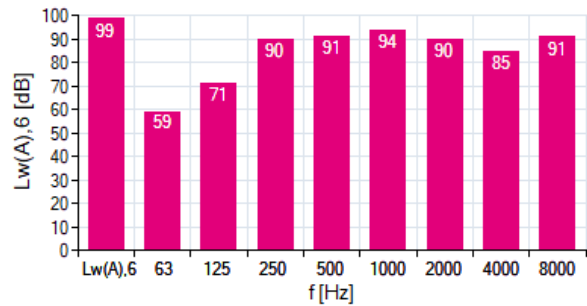

1 GR45C-ZIK.GG.CR									
f [Hz]	sum	63	125	250	500	1000	2000	4000	8000
L <sub>w(A),5</sub>	93	57	67	84	85	84	82	77	89
L <sub>w,5</sub>	96	83	82	91	88	84	81	76	91

f [Hz]	sum	63	125	250	500	1000	2000	4000	8000
L <sub>w(A),6</sub>	99	59	71	90	91	94	90	85	91
L <sub>w,6</sub>	101	85	86	97	94	94	89	84	93


# FANselect




efficiency grade / power input 15/12/2021  
version FANselect V 1.01 (211209), AMCA V 1.03 September, 2021 / 1.21.12.09 | 53567 | (user ZAFS43567)

① **GR45C-ZIK.GG.CR** measured in standard nozzle in installation type A according to ISO 5801  
116843/A01 | Portfolio measurement density 0.072 [lbs/ft<sup>3</sup>]  
STD-WW


efficiency grade  $\eta_{F,sys}$

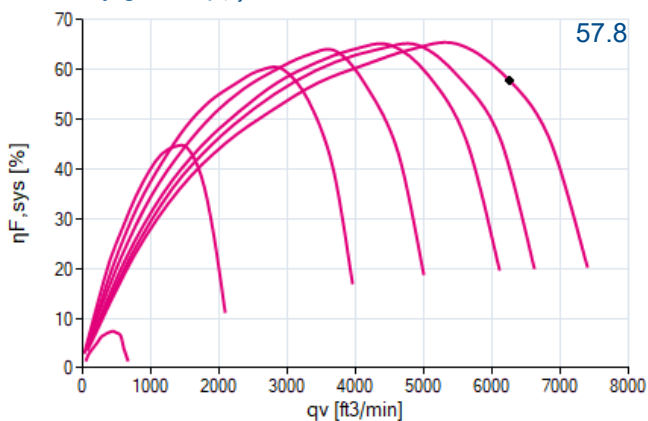

efficiency grade  $\eta_{sF,sys}$

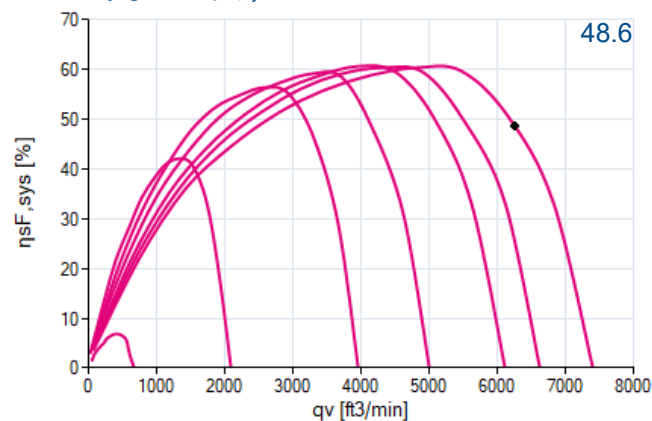

power input  $P_{sys}$

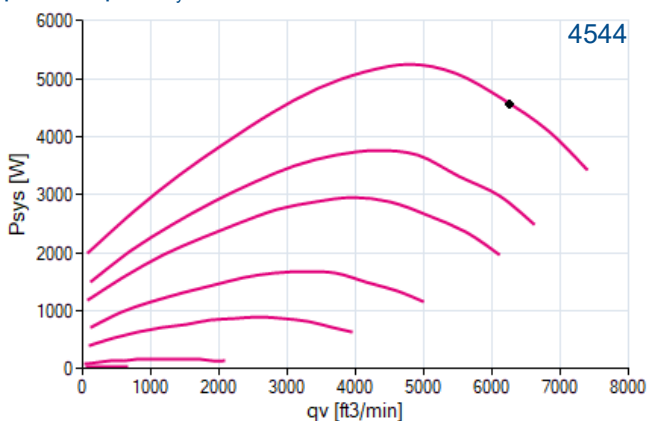




## nominal values

15/12/2021

version FANselect V 1.01 (211209), AMCA V 1.03 September, 2021 / 1.21.12.09 | 53567 | (user ZAFS43567)

1



**GR45C-ZIK.GG.CR**  
116843/A01


3~ 380-480V 50Hz P1 5.20kW  
8.40-6.60A 2570/MIN 40°C  
3~ 380-480V 60Hz P1 5.20kW  
8.40-6.60A 2570/MIN 40°C  
IP55 THCL155

## drawing


15/12/2021

version FANselect V 1.01 (211209), AMCA V 1.03 September, 2021 / 1.21.12.09 | 53567 | (user ZAFS43567)

1



**GR45C-ZIK.GG.CR**  
116843/A01

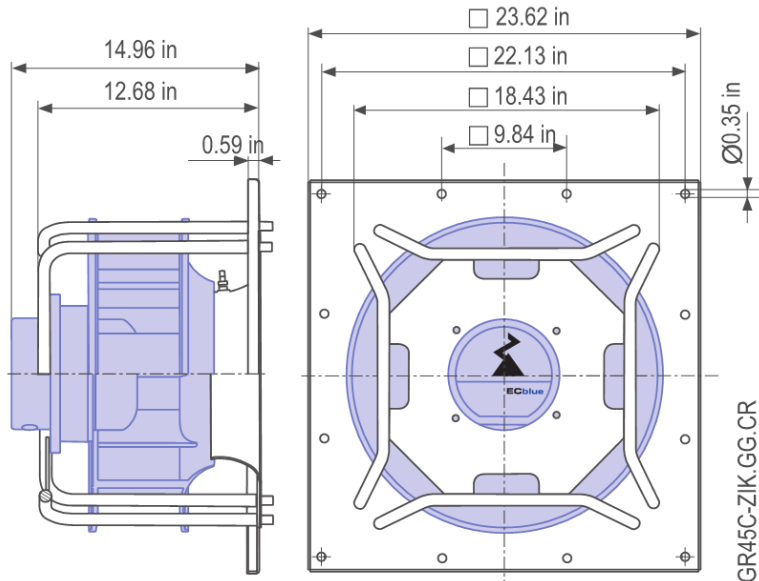


## wiring diagram


15/12/2021

version FANselect V 1.01 (211209), AMCA V 1.03 September, 2021 / 1.21.12.09 | 53567 | (user ZAFS43567)

1



**GR45C-ZIK.GG.CR**  
116843/A01

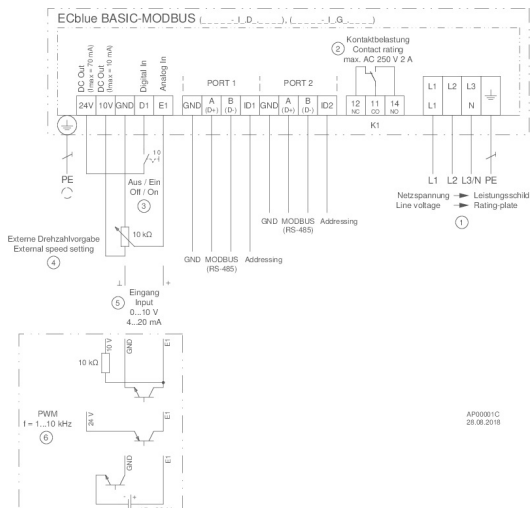



## system components

15/12/2021

version FANselect V 1.01 (211209), AMCA V 1.03 September, 2021 / 1.21.12.09 | 53567 | (user ZAFS43567)



type	GR45C-ZIK.GG.CR
article no.	116843/A01