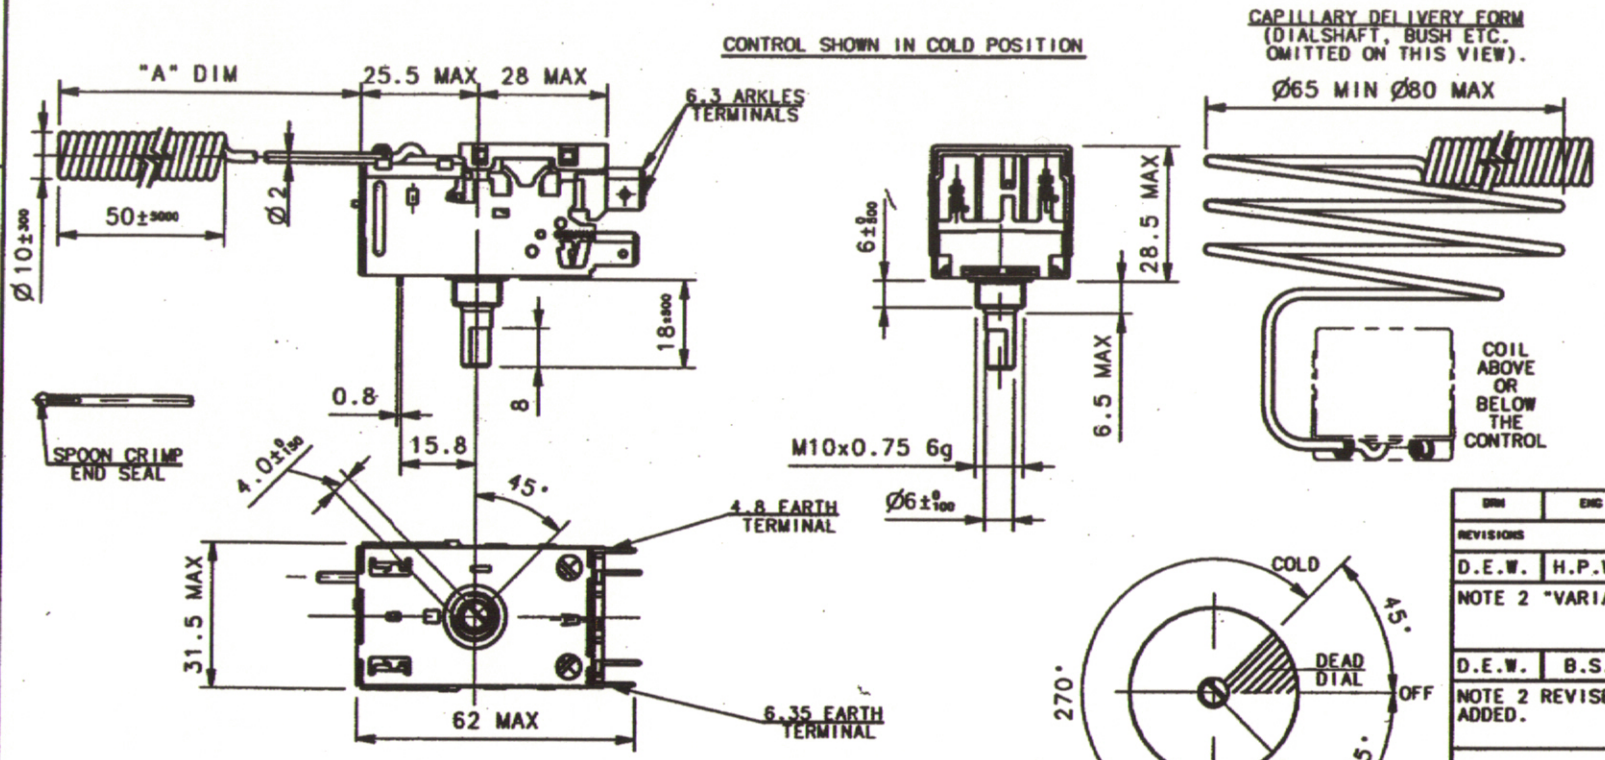

NOTES:-
1. RCL USE MTG.NUT 58175-3
2. VARIANTS -005 & -006 ONLY:- SWITCH COVER NOT REQUIRED

DIAL LAYOUT

ROTATION CLOCKWISE WARM TO COLD

DRN	ENG	CHK	REV DATE	REV
REVISIONS				
D.E.W.	H.P.W.			N
NOTE 2 "VARIANT -005.." ADDED 983811P 0042248L				
D.E.W.	B.S.			P
NOTE 2 REVISED "..& -006.." ADDED. 004504P 0107040L				

IT IS NOT ALLOWED TO REPRODUCE OR GIVE THIS DRAWING TO ANY PERSONS OR COMPANY WITHOUT WRITTEN PERMISSION FROM RANCO.

ALL DIM. IN mm | ALL TOL. IN ⅿm

DIMENSIONS WITHOUT TOLERANCE
0 - 6: ±150 | >18 - 50: ±300
>6-18: ±200 | > 50: ±400
▷ ± 4°

RANCO

PART NO.	USED ON	DRN: DEW	3 PLACE DEC.DIM.
SCALE: 1 : 1	TYPE PART:	ENG: HPW	±
	DO NOT SCALE	CHK:	2 PLACE DEC.DIM.

TITLE: OUTLINE DIMENSION DRAWING TYPE K50 CONTROL

ANGLES

DWG. SIZE: A3 | DEV.NO. | DWG. NO. 3300614 | SHEET 1 or 2

SEE SHT.2

DESCRIPTION	PART N°
SHIP UNASSEMBLED	
	CODE

CUSTOMER PART N°	CODE	"A" DIM TOL mm	FILL	CUSTOMER SETTINGS AND TOLERANCES °C AT					
	K50-H2005	1450±0.100	R134a	-2.5±1.0	-0.5±1.0				+14.0±2.2
				OUT	IN	OUT	IN	OUT	IN
				COLD		NORMAL		WARM	
		BELLOWS		CUSTOMER SETTINGS AND TOLERANCES °C AT 737 mm Hg					