

LPF SERIES**ELECTRONIC
EXPANSION VALVE**

LPF series Electronic Expansion Valves are especially designed for use in refrigeration systems. Thanks to the soft-sealing seat design, it can be as tight as a solenoid valve once it is completely shut off thus to prevent liquid refrigerant migrate to evaporator or compressor.

**FEATURES**

- EXTREMELY HIGH INTERNAL TIGHTNESS, WHICH IS AS GOOD AS WITH SOLENOID VALVES(<1ML/MIN)
- EQUAL PERCENTAGE FLOW DESIGN FOR BETTER FLOW REGULATION
- SNAP-ON COIL FOR EASIER INSTALLATION
- COIL WITH IP67 WORKS SAFELY IN EXTREMELY ENVIRONMENT
- APPLICABLE FOR OIL-FREE SYSTEM (NOT INCLUDE LPF45-62)
- BUILT-IN STRAINER AT INLET
- FLOW DIRECTION: UNI-FLOW
- LPF...T : 90 BAR DESIGN FOR R744 REFRIGERANT

GENERAL SPECIFICATION

- Applicable for all common HCFC, HFC and HFO refrigerants (such as: R134a, R404A, R407A/F, R407C, R410A, R448A, R449A, R450A, R452A, R513A, R507A and also for flammable refrigerants like R290, R1234ze, R454C, R455A, R1234yf and R744 (CO₂))
- 500 steps (full stroke); 32 ± 20 opening steps
- Temperature:

LPF Model	Medium temperature Min/Max	Ambient temperature Min/Max
LPF03 ~ 32	-40°C / +70°C (1)	-40°C / +60°C (1)
LPF45 ~ 62	-30°C / +70°C (2)	-30°C / +60°C (2)
LPF03T ~ 32T	-40°C / +70°C (1)	-40°C / +60°C (1)

⁽¹⁾duty cycle rate below 40% / ⁽²⁾duty cycle rate below 50%

- Relative humidity: 0 to 95% RH
- Pressures:

LPF Model	MPW	MOPD
LPF03 ~ 32	42 bar	35 bar
LPF45 ~ 62	49 bar	35 bar
LPF03T ~ 24T	90 bar	50 bar
LPF30T ~ 32T	90 bar	35 bar

- Declaration according to LVD and PED (on going for LPF-T range)
- Suitable with the EN 60335-2-24 / 2-40 / 2-89 (on going for LPF-T range)



ELECTRICAL PARAMETERS

- Rated voltage: 12V DC(± 10%), rectangular wave
- Excitation mode: 1 - 2 phase excitation, uni-polar actuation

L ^{PF} Model	Excitation rate	Full stroke time
L ^{PF} 03 ~ 32	30 - 90pps	6s@ 90pps
L ^{PF} 45 ~ 62	30 - 40pps	13s@40pps
L ^{PF} 03T ~ 32T	30 - 90pps	6s@ 90pps

- Coil current: 260mA/phase (20°C)
- Coil resistance: 46 ± 3.7 Ω/phase (20°C)
- Insulation class of coil: E
- Protection class: IP 67
- Compatible with Sanhua controller SEC series

GENERAL CHARACTERISTICS

Condition 1: $T_c/T_e/S_c/S_H$: 45oC/-10oC/2K/6K (0 °C/-20 °C/2K/6K for R744)

Valve Model	Seat Φ (mm)	K _v (m³/h)	Maximal Cooling Capacity [kW]							
			R134a	R404A	R407F	R448A	R449A	R450A	R452A	R513A
L ^{PF} 03/L ^{PF} 03T	0.3	0.009	0.90	0.80	1.28	1.14	1.12	0.79	0.84	0.74
L ^{PF} 05/L ^{PF} 05T	0.5	0.014	1.39	1.23	1.97	1.75	1.72	1.21	1.29	1.15
L ^{PF} 08/L ^{PF} 08T	0.8	0.025	2.3	2.0	3.2	2.8	2.8	2.0	2.1	1.84
L ^{PF} 10/L ^{PF} 10T	1.0	0.04	3.6	3.2	5.1	4.6	4.5	3.2	3.4	3.0
L ^{PF} 14/L ^{PF} 14T	1.4	0.08	6.9	6.1	9.7	8.7	8.5	6.0	6.4	5.7
L ^{PF} 18/L ^{PF} 18T	1.8	0.12	9.5	8.4	13.5	12.0	11.8	8.3	8.8	7.9
L ^{PF} 24/L ^{PF} 24T	2.4	0.20	13.0	11.5	18.4	16.4	16.1	11.3	12.1	10.8
L ^{PF} 30/L ^{PF} 30T	3.0	0.27	18.4	16.2	26.0	23.3	22.7	16.0	17.1	15.2
L ^{PF} 32/L ^{PF} 32T	3.2	0.30	20.2	17.8	28.5	25.5	24.9	17.6	18.7	16.6
L ^{PF} 45	4.5	0.5	45.3	39.9	64.0	57.1	55.9	39.5	41.9	37.3
L ^{PF} 52	5.2	0.7	60.6	53.4	85.6	76.3	74.8	52.8	56.0	49.9
L ^{PF} 55	5.5	0.9	70.2	61.8	99.1	88.4	86.6	61.1	64.8	57.7
L ^{PF} 62	6.2	1.1	85.3	75.2	102.5	107.5	105.3	74.4	78.9	70.2

Valve Model	Seat Φ (mm)	K _v (m³/h)	Maximal Cooling Capacity [kW]							
			R454B	R454C	R455A	R1234yf	R1234ze	R290	R410A	R744
L ^{PF} 03/L ^{PF} 03T	0.3	0.009	1.62	0.98	1.06	0.63	0.70	1.21	1.39	1.89
L ^{PF} 05/L ^{PF} 05T	0.5	0.014	2.49	1.51	1.64	0.98	1.08	1.86	2.14	2.91
L ^{PF} 08/L ^{PF} 08T	0.8	0.025	4.0	2.4	2.6	1.6	1.7	3.0	3.4	4.7
L ^{PF} 10/L ^{PF} 10T	1.0	0.04	6.5	3.9	4.3	2.6	2.8	4.9	5.6	7.6
L ^{PF} 14/L ^{PF} 14T	1.4	0.08	12.4	7.5	8.1	4.8	5.3	9.2	10.6	14.4
L ^{PF} 18/L ^{PF} 18T	1.8	0.12	17.1	10.3	11.2	6.7	7.4	12.8	14.6	19.9
L ^{PF} 24/L ^{PF} 24T	2.4	0.2	23.4	14.1	15.3	9.2	10.1	17.5	20.0	27.2
L ^{PF} 30/L ^{PF} 30T	3.0	0.27	33.0	19.9	21.7	12.9	14.2	24.7	28.3	38.5
L ^{PF} 32/L ^{PF} 32T	3.2	0.30	36.2	21.8	23.7	14.2	15.6	27.0	31.0	42.1
L ^{PF} 45	4.5	0.5	81.1	49.0	53.3	31.7	35.0	60.6	69.5	-
L ^{PF} 52	5.2	0.7	108.5	65.5	71.2	42.5	46.8	81.1	93.0	-
L ^{PF} 55	5.5	0.9	125.5	75.8	82.5	49.2	54.2	93.9	107.6	-
L ^{PF} 62	6.2	1.1	152.7	92.3	100.3	59.8	65.9	114.2	130.9	-



Condition 2: $T_c/T_e/S_c/S_H$: 45°C/-35°C/2K/6K (-10°C/-40°C/2K/6K for R744)

Valve Model	Seat Φ (mm)	Kv (m ³ /h)	Maximal Cooling Capacity [kW]							
			R134a	R404A	R407F	R448A	R449A	R450A	R452A	R513A
LPF03/LPF03T	0.3	0.009	0.85	0.73	1.23	1.08	1.06	0.72	0.76	0.68
LPF05/LPF05T	0.5	0.014	1.31	1.13	1.90	1.67	1.63	1.11	1.18	1.05
LPF08/LPF08T	0.8	0.025	2.1	1.8	3.1	2.7	2.6	1.8	1.9	1.7
LPF10/LPF10T	1.0	0.04	3.4	3.0	5.0	4.4	4.3	2.9	3.1	2.7
LPF14/LPF14T	1.4	0.08	6.5	5.6	9.4	8.3	8.1	5.5	5.8	5.2
LPF18/LPF18T	1.8	0.12	9.0	7.7	13.0	11.4	11.2	7.6	8.0	7.2
66733 LPF24/LPF24T	2.4	0.2	12.3	10.6	17.8	15.6	15.3	10.5	11.0	9.9
66735 LPF30/LPF30T	3.0	0.27	17.4	15.0	25.1	22.1	21.6	14.8	15.6	13.9
66737 LPF32/LPF32T	3.2	0.30	19.0	16.4	27.5	24.2	23.7	16.2	17.0	15.3
LPF45	4.5	0.5	42.6	36.8	61.7	54.3	53.1	36.3	38.3	34.2
LPF52	5.2	0.7	57.0	49.2	82.6	72.7	71.7	48.5	51.2	45.8
LPF55	5.5	0.9	66.0	57.0	95.6	84.1	82.2	56.2	59.2	53.0
LPF62	6.2	1.1	80.3	69.3	116.3	102.3	100.0	68.3	72.1	64.5

Valve Model	Seat Φ (mm)	Kv (m ³ /h)	Maximal Cooling Capacity [kW]							
			R454B	R454C	R455A	R1234yf	R1234ze	R290	R410A	R744
LPF03/LPF03T	0.3	0.009	1.63	0.90	0.98	0.56	0.63	1.16	1.39	2.18
LPF05/LPF05T	0.5	0.014	2.51	1.39	1.51	0.87	0.98	1.79	2.14	3.36
LPF08/LPF08T	0.8	0.025	4.0	2.2	2.4	1.4	1.6	2.9	3.5	5.4
LPF10/LPF10T	1.0	0.04	6.6	3.6	4.0	2.3	2.6	4.7	5.6	8.8
LPF14/LPF14T	1.4	0.08	12.5	6.9	7.5	4.3	4.8	8.8	10.6	16.6
LPF18/LPF18T	1.8	0.12	17.2	9.5	10.4	6.0	6.7	12.2	14.6	23.0
66733 LPF24/LPF24T	2.4	0.2	23.5	13.0	14.2	8.2	9.2	16.7	20.0	31.5
66735 LPF30/LPF30T	3.0	0.27	33.3	18.4	20.0	11.6	12.9	23.6	28.3	44.5
66737 LPF32/LPF32T	3.2	0.30	36.4	20.2	21.9	12.7	14.2	25.9	30.9	48.7
LPF45	4.5	0.5	81.7	45.2	49.1	28.3	31.8	58.1	69.4	-
LPF52	5.2	0.7	109.3	60.5	65.8	37.9	42.5	77.7	92.9	-
LPF55	5.5	0.9	126.6	70.1	76.1	43.8	49.2	89.9	107.5	-
LPF62	6.2	1.1	153.9	85.2	92.6	53.3	59.9	109.4	130.8	-

Note: The Max capacity is given for full opened position


LPF... is standard series, LPF...T is designed for CO₂ application



DIMENSIONS

(Unit is mm)

$\varnothing N = 17.35 \text{ mm}$

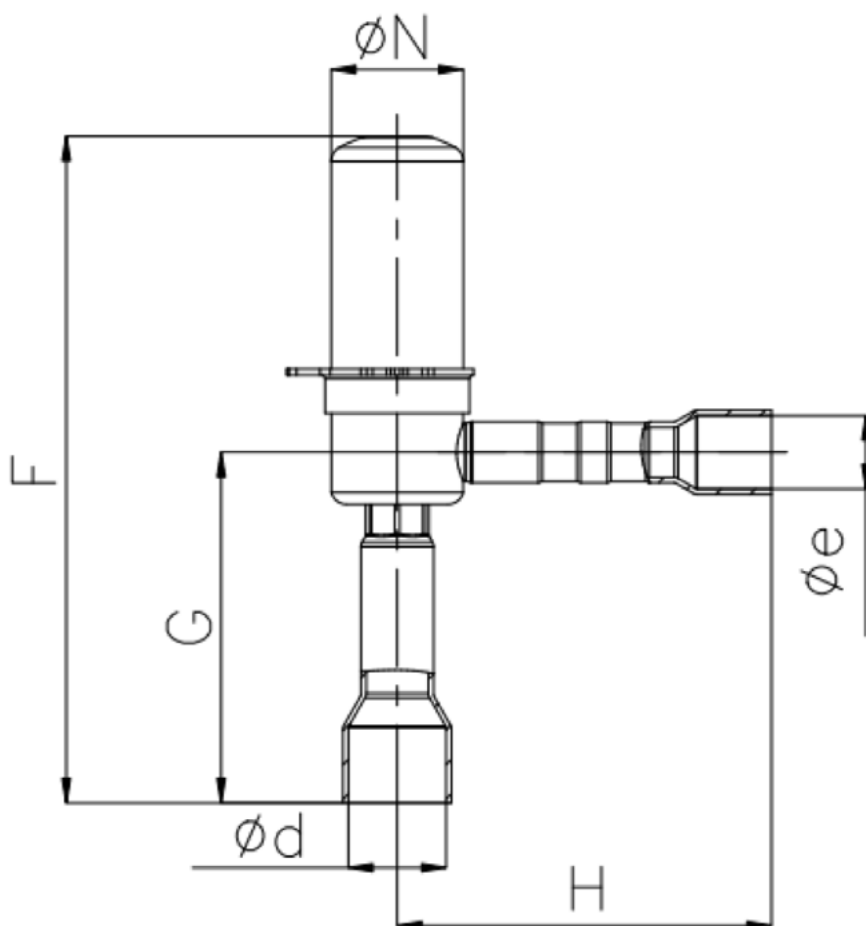





Valve Model	U11 Code Multi-Pack	Dimensions					Weight (g)
		F	G	H	Øe Inlet	Ød Outlet	
LPF03-001	10136007902	87	45.8	49	3/8	1/2	51.8
LPF05-001	10136008102				3/8	1/2	51.8
LPF08-001	10136003202				3/8	1/2	51.8
LPF08-002	10136003302				1/4	1/4	44.2
LPF08-003	10136004302				10mm	12mm	51
LPF10-002	10136000502				3/8	1/2	51.8
LPF10-003	10136000602				1/4	3/8	47.7
LPF10-004	10136000702				10mm	12mm	51
LPF10-005	10136000802				6mm	10mm	49.4
LPF14-002	10136000902				3/8	1/2	51.8
LPF14-003	10136001002				1/4	3/8	47.7
LPF14-004	10136001102				10mm	12mm	50.9
LPF14-005	10136001202				6mm	10mm	49.3
LPF18-002	10136001302				3/8	1/2	51.8
LPF18-003	10136001402				10mm	12mm	50.9
LPF24-002	10136001502				3/8	1/2	51.7
66733 LPF24-003	10136001602				10mm	12mm	50.8
LPF30-001	10136003902				3/8	1/2	52.6
LPF30-002	10136004602				10mm	12mm	51.7
LPF32-001	10136003402				3/8	1/2	52.6
66735 LPF32-002	10136004002				1/4	3/8	48.4
LPF32-003	10136004502				10mm	12mm	51.7
LPF45-001	10136007302	116	62.5	57.2	5/8	5/8	104.6
66737 LPF52-001	10136007402						104.3
LPF55-001	10136007502						104.0
LPF62-001	10136007602						103.6



FLOW CHARACTERISTIC (EQUAL PERCENTAGE)

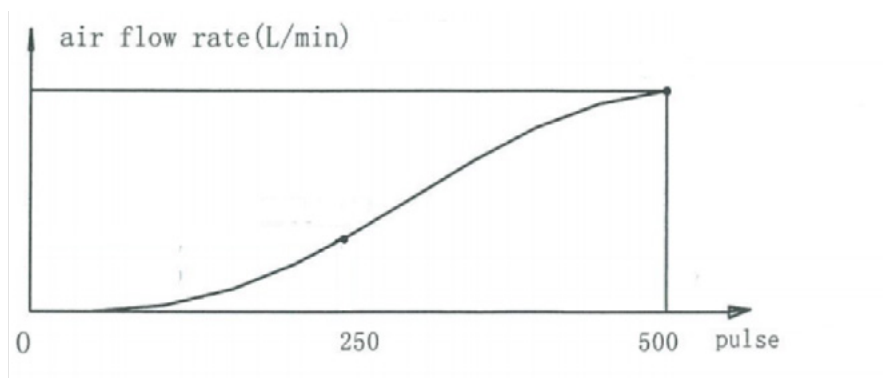

LPF and LPF-T (03-32)

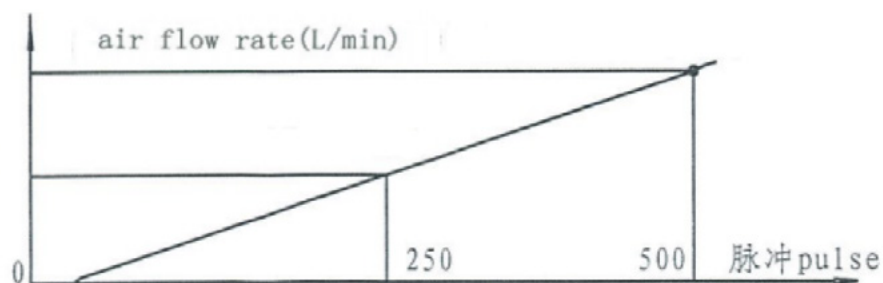


LPF 45-62

LPF SERIES

ELECTRONIC EXPANSION VALVE



The coil is separated
(Unit is mm)

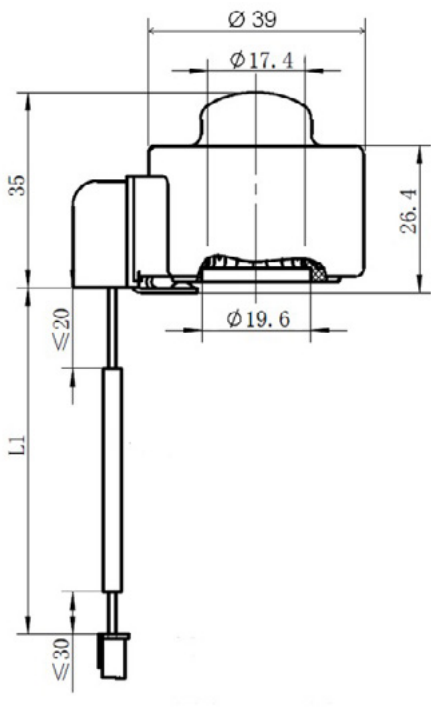

Coil Model	Coil Code number	Coil Dimensions [mm]	Weight (g)
		L1	
PQ-M24012-000007	10810127602	1500	140,2
PQ-M24012-000008	10810129502	3000	
PQ-M24012-000009	10810129602	6000	
PQ-M24012-000010	10810129702	9000	