



Wiring diagram:

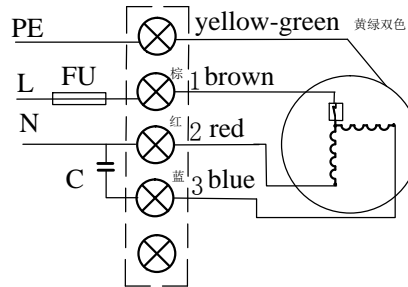


Technical specification:

- All parts of fan should be properly assembled, no oil or dirt on the surface, no obvious distortion, mechanical damage and other defects.
- Fan rotation is flexible, no delay, no operation sound, no scratch and other undesirable phenomena.
- The safety requirement of fan is performed according to GB12350-2009, the electrical strength is 1500V•min, and the insulation resistance is not less than 100MΩ at room temperature.
- Motor insulation class, F CLASS.
- Motor protection level, IP54, fan protection level, IP2X.
- The fan balance level is: 1410±10%r/min high than G6.3, vibration value is less than 5.4mm/s.

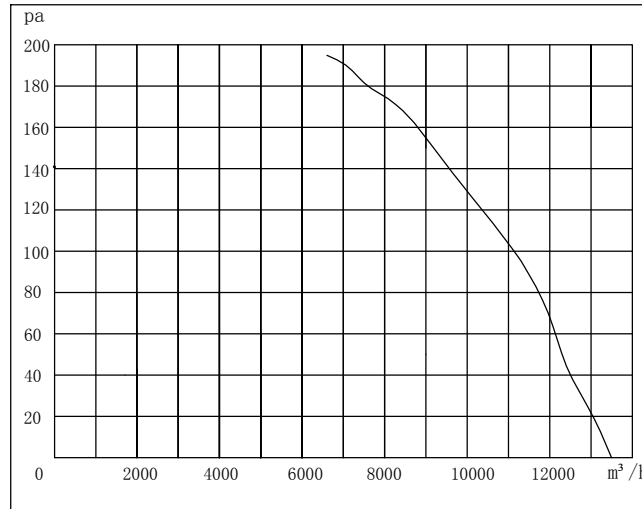

Nameplate:




Product model	YDWF102L70P4-753N-630 S
product type	External rotor axial flow fan
customer	以色列DAYAN
Product number	
certification	CE, CCC

Condition of use:

- voltage and frequency: 1~230 V±5%, 50 Hz.
- Qualification requirements: Terminal block, the recommended standard of lead wire is not less than 0.75 mm².
- Installation position: vertical or upward.
- ambient temperature: -10~70°C.

The external wiring diagram:

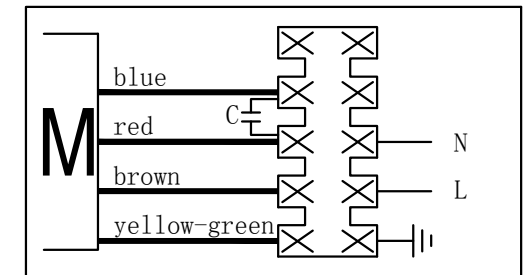

Test data at free :

connection	UAC (V)±5%	f (Hz)	P1 (W) ±10%	I (A) ±10%	n (r/min) ±10%	Noise dB(A)
1~230	230	50	780	3.6	1410	76

	The signature	(date) (month) (year)	
state	deliver before		Product Specification
	after the confirmation		
drawing			
audit			
approval			