



Specifications

7804 : 07n

AC Axial Fan

Model : YWF4E-250

Type : B-E5Z

Coding : E04020101

Version: V1.0

Date : 2021.10.28


Version	Status	Version update instructions	Date	DRN BY	CHK BY
V1.0	Effective	Initial release	2021-10-28	JX. Chen	XQ. Chen




Standards

- GB12350 《Safety Requirements of small Power motors》
- EN60335-1 《Safety Requirements of Household of Similar Electrical Appliances》
- The level of balance is in accordance with ISO 1940, G4.0
- Vibration testing and velocity is performed according to JB/T8689.
- This product is certified by China CCC and EU CE
- ISO 9001 quality system certification
- Standard of noise test:ISO 13347 《Determination of fan sound power levels under standardized laboratory conditions》
- The fan performance data is accurate and reliable, conforming to GB/T1236-2017 and 《Industrial fans-performance testing using standardize dairways》 in IS05801-2007 standards.

Product Drawings

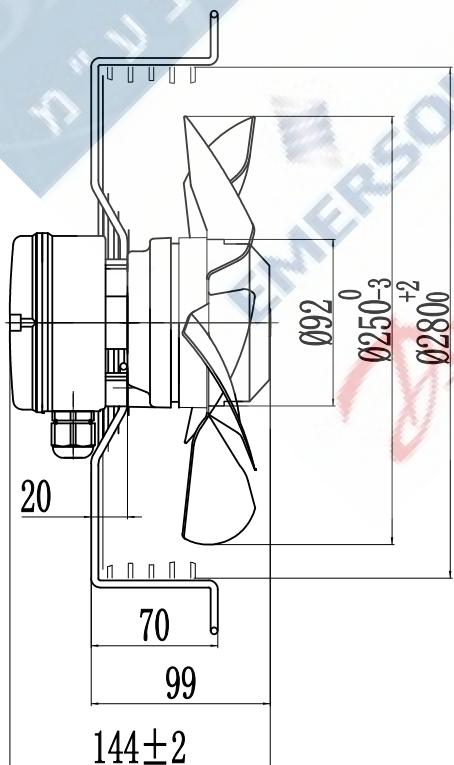

Direction of airflow

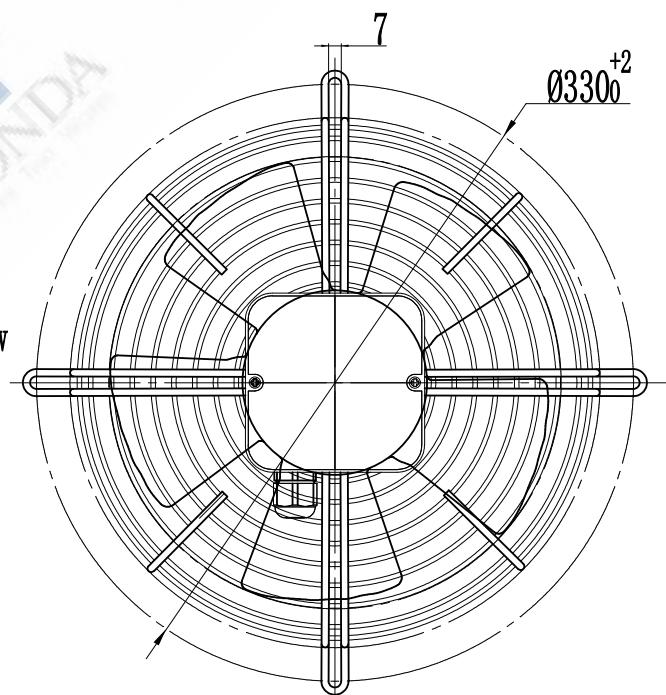

Rotation direction



Technical Parameters


Power supply	Phase	1
Frequency	Hz	50
Wiring		-
Capacitance	µF	1.5
Input Voltage	V	230
Input Current	A	0.23
Input Power	W	50
Rated Speed	r/min	1430
Fan Noise	dB(A)	55
Fan Steering		Clockwise (From the motor)
Fan Life	h	40000
Fan Weight	kg	2.7
Protection Level		IP54
Insulation Class		F
Balance Level		G4.0
Ambient Temperature	°C	-40 ~ +60
Environment Humidity		≤ 90% RH
Impeller Material		Metal
Spray Color		-
Operating Status		S1



Label


External Rotor Axial Fan					
YWF4E-250	B-E5Z		E04020101		
230V	50Hz	0.23A	50W	1.5 μ F/450V	
1430r/min		900m ³ /h	60Pa	CL. F	Date:2021.XX

Product wiring diagram

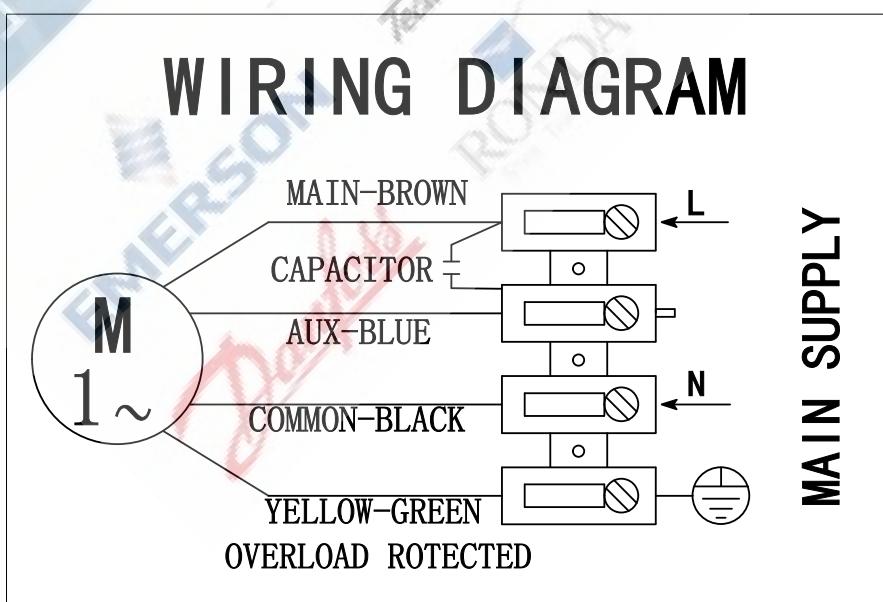



Product Performance

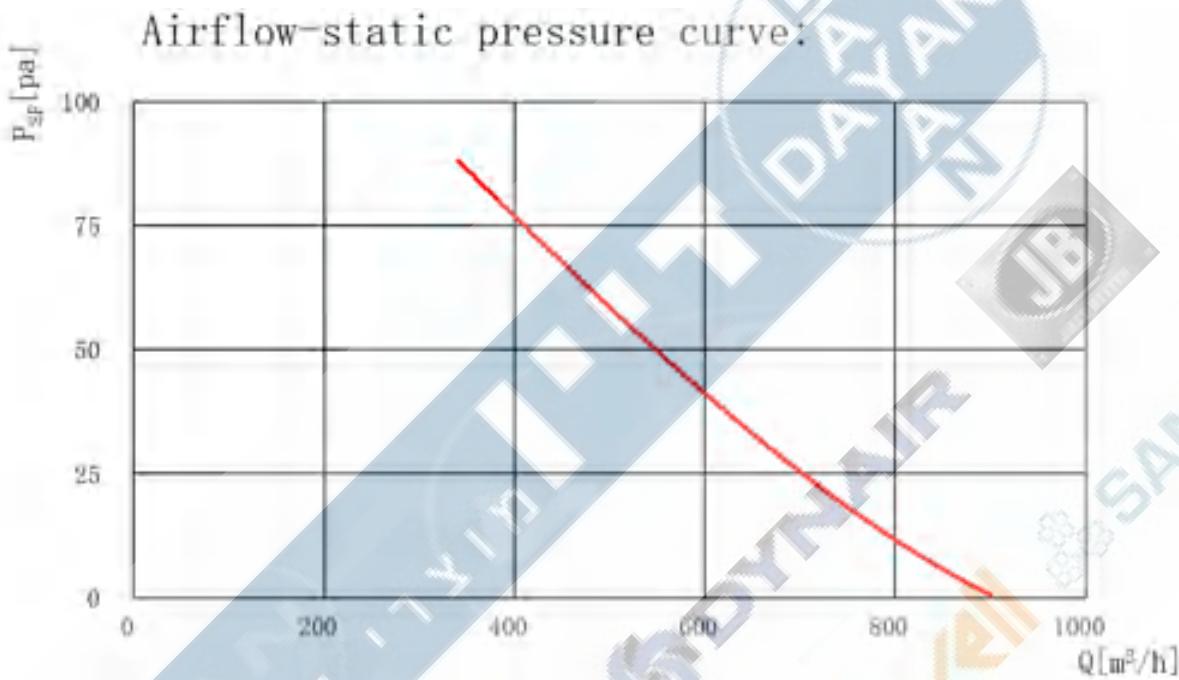

St. P. Pa	Air Flow m^3/h	Speed RPM	Voltage V	Freq. Hz	Current Amp	Power W
0	900	1445	230	50	0.22	47
8	830	1440	230	50	0.22	48
15	780	1438	230	50	0.23	49
23	730	1434	230	50	0.23	49
29	680	1435	230	50	0.23	49
33	630	1436	230	50	0.23	49
43	580	1437	230	50	0.23	49
60	500	1430	230	50	0.23	50
75	420	1402	230	50	0.25	52
87	340	1390	230	50	0.25	54