

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Typical data:

Product name	RENISO TRITON SEZ 32		
Properties	Unit		Test method
Density at 15 °C	kg/m ³	1004	DIN 51757
Flash point	°C	250	DIN ISO 2592
Colour	-	1.0	DIN ISO 2049
Kinematic viscosity at 40 °C	mm ² /s	32	DIN EN ISO 3104
at 100 °C	mm ² /s	6.1	
Viscosity index	-	140	DIN ISO 2909
Pourpoint	°C	-57	DIN ISO 3016
Neutralisation number	mgKOH/g	0.03	DIN 51558-1
Water content	mg/kg	< 50	DIN 51777-2
Rapidly biodegradable	-	yes	OECD 301 B

Specifications


NSF H2 registration:
registration no. 146752

Please find more information about the complete range of synthetic polyolester oils (POEs) on Product Information sheet: PI 4-1255 / RENISO TRITON SE/SEZ Series.

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R1224yd

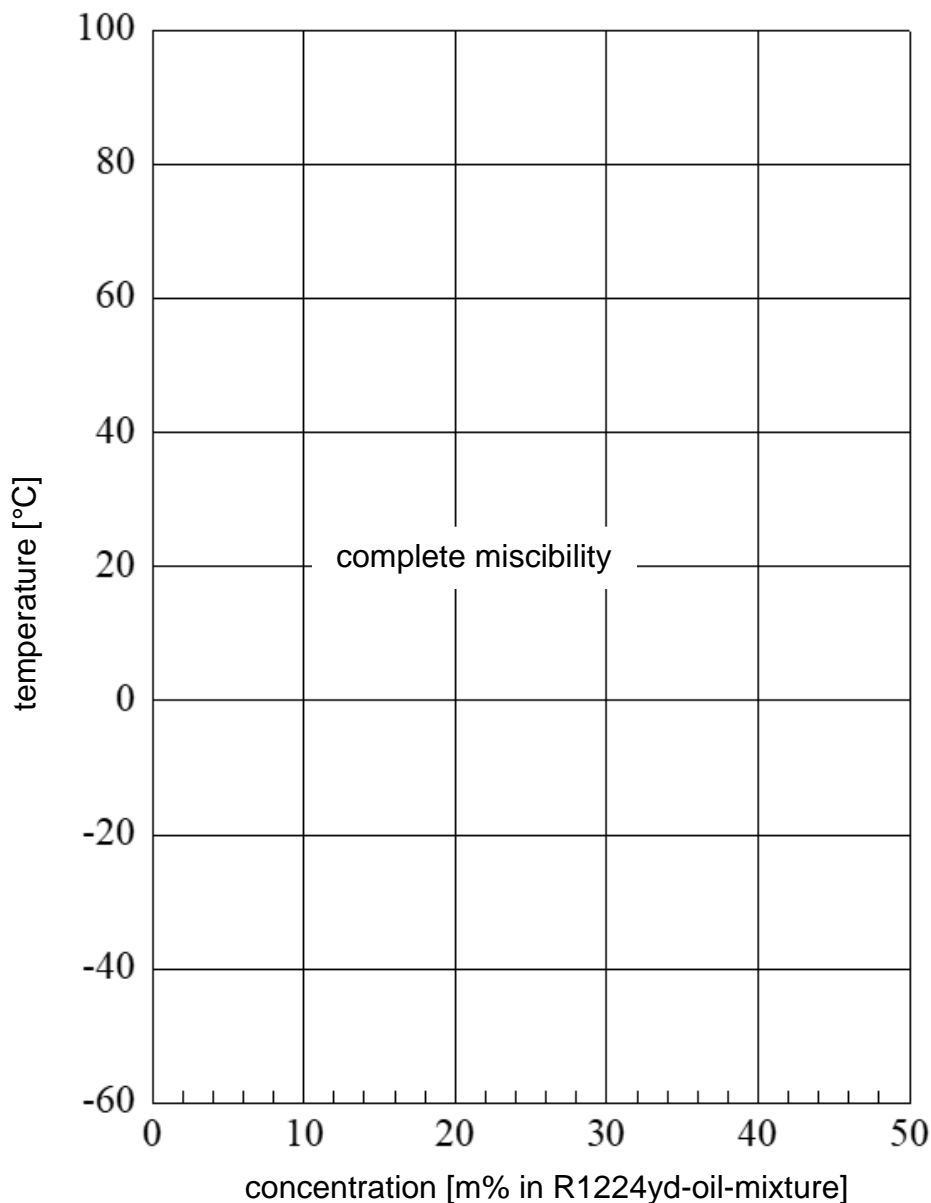

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R1233zd

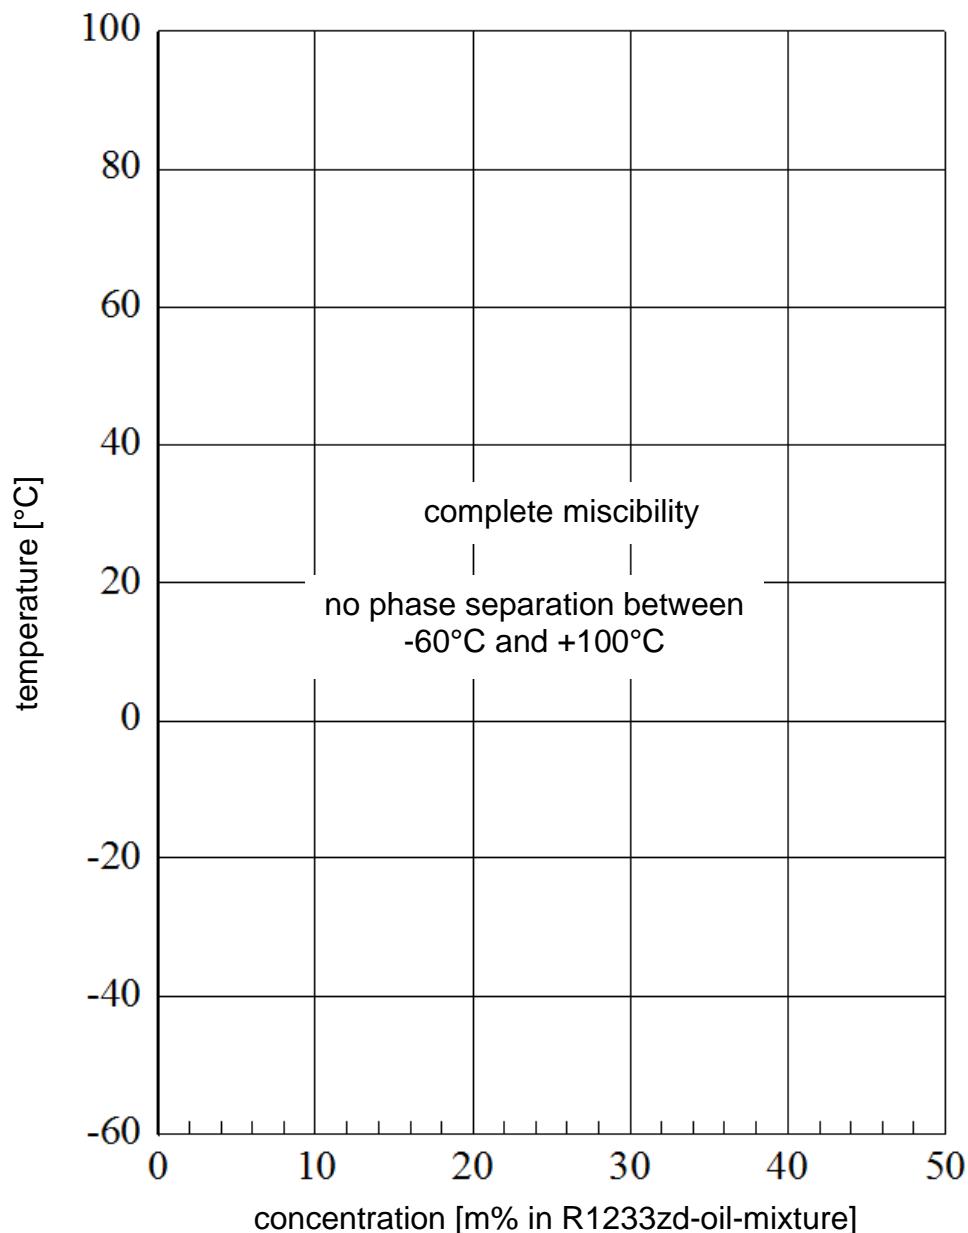

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R1234yf

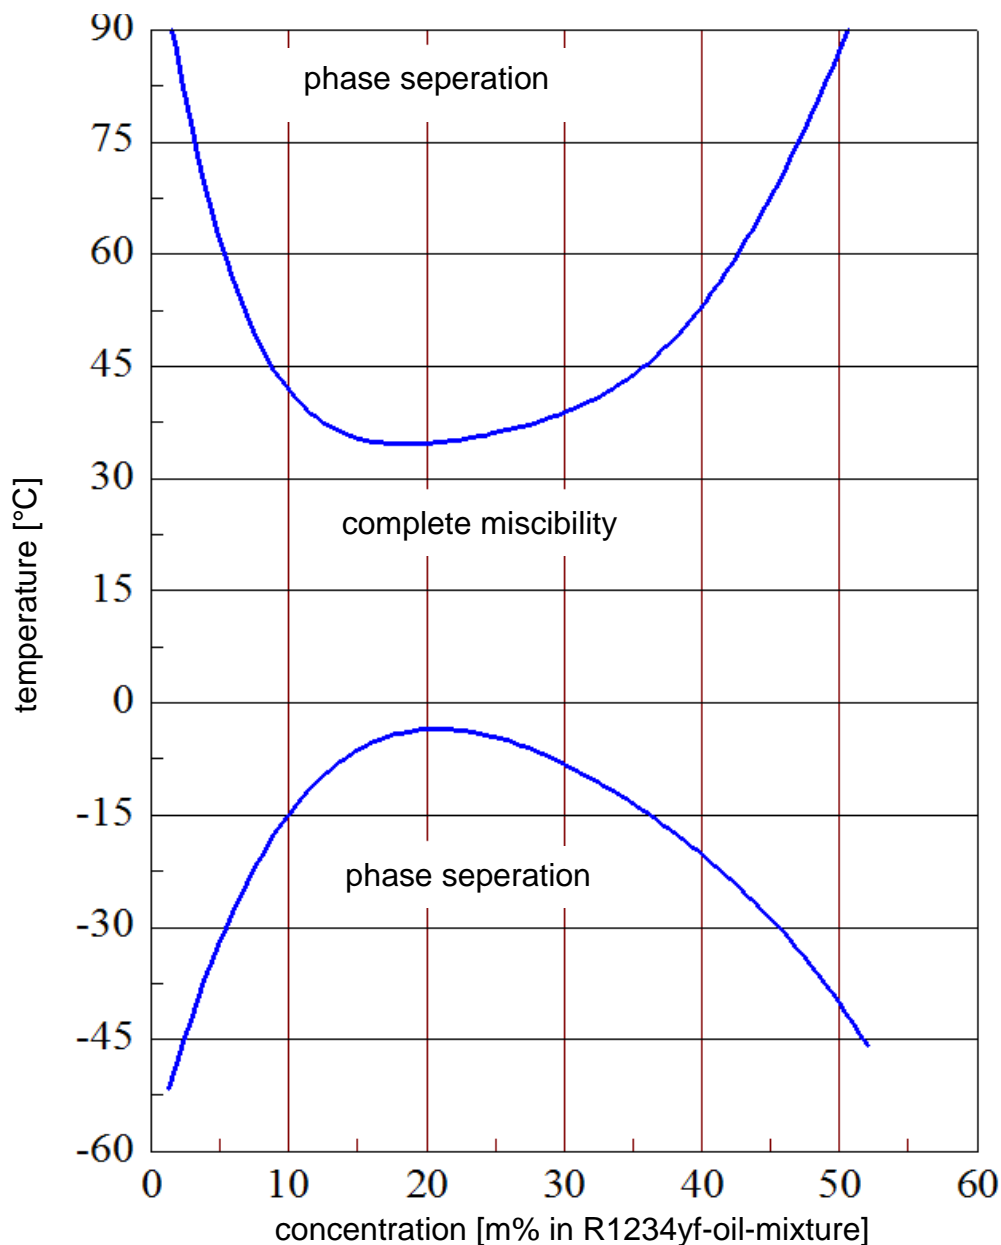

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R1234yf

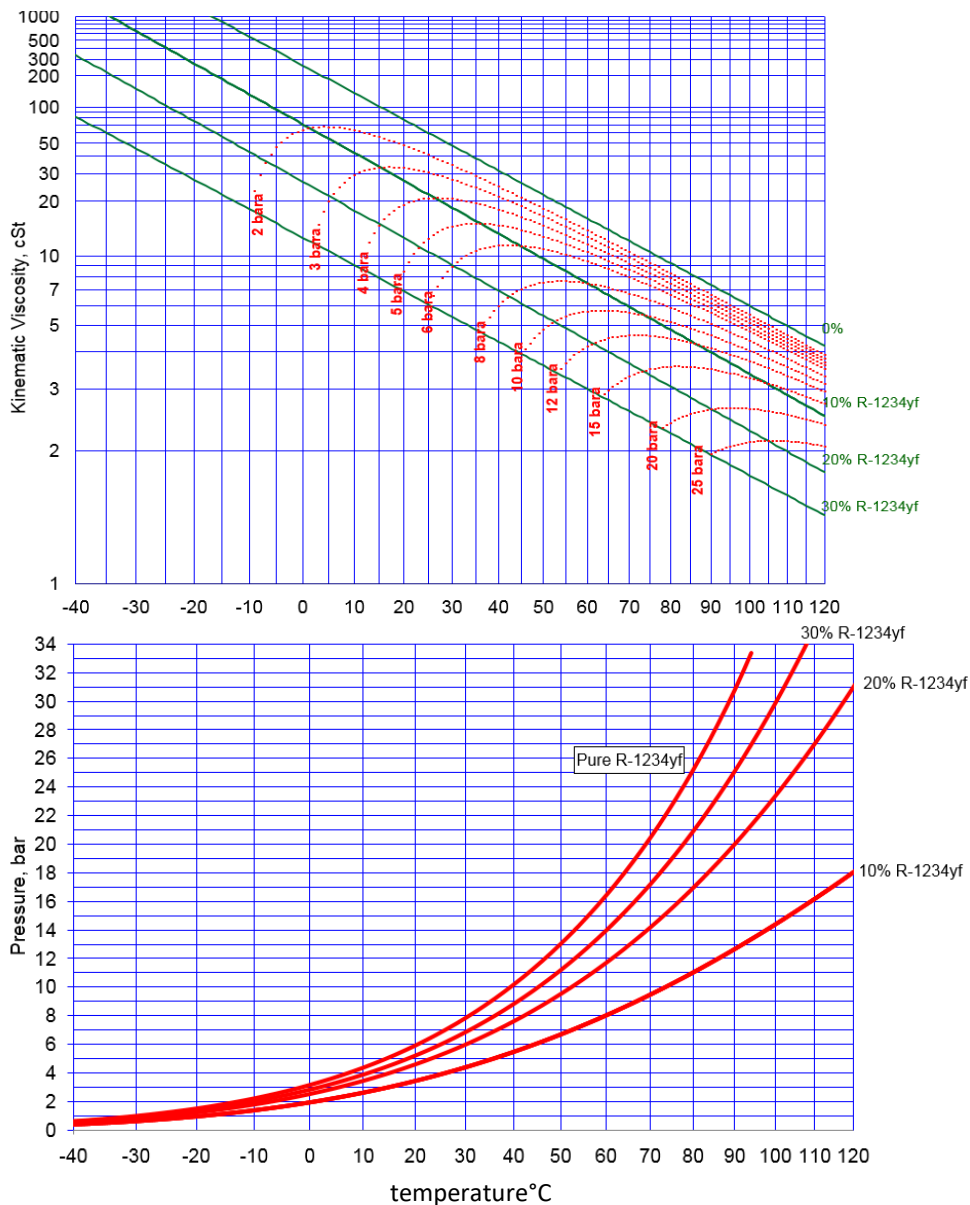


All % figures represent m% refrigerant in the refrigerant-oil-mixture.

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.



Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R1234ze

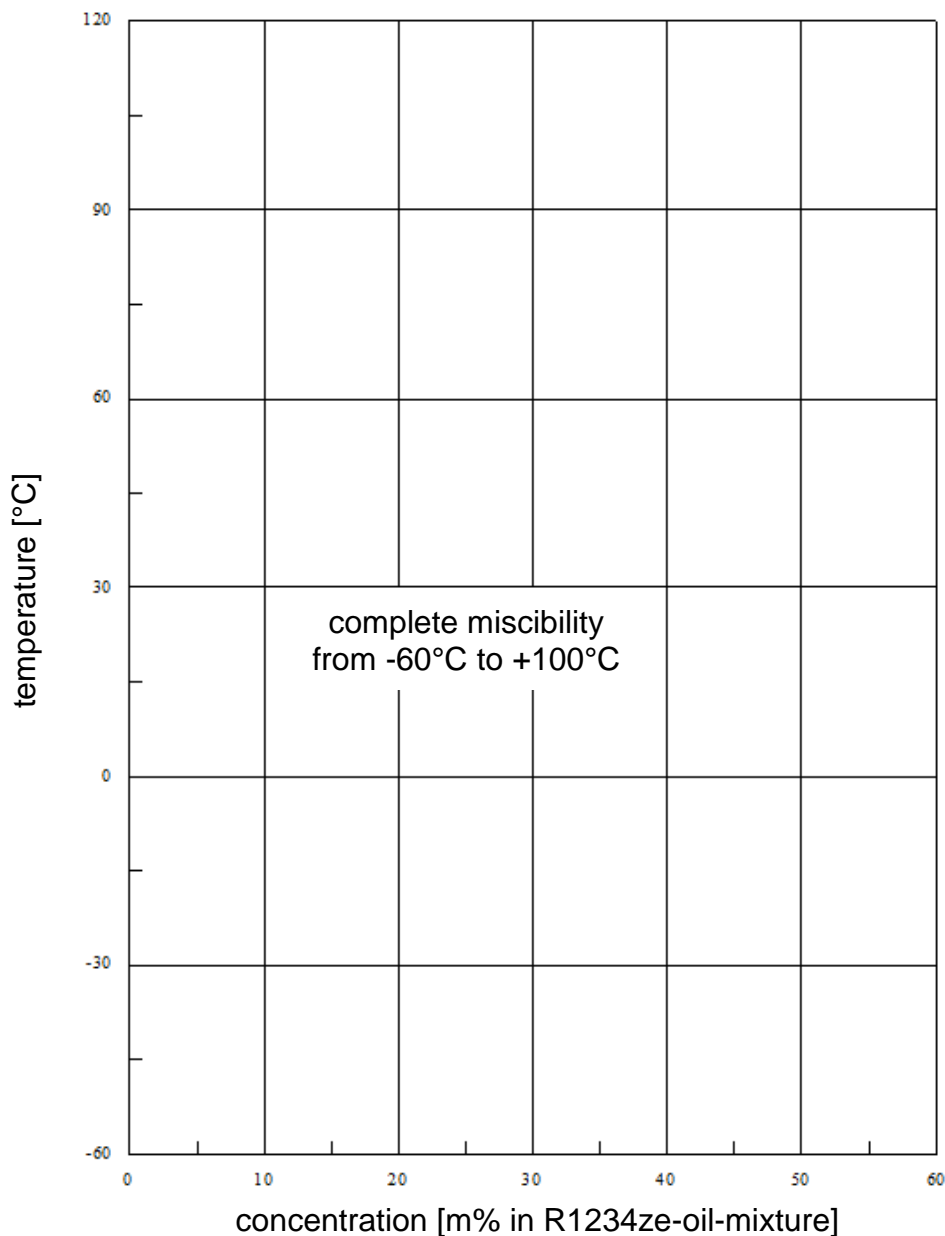

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R1234ze

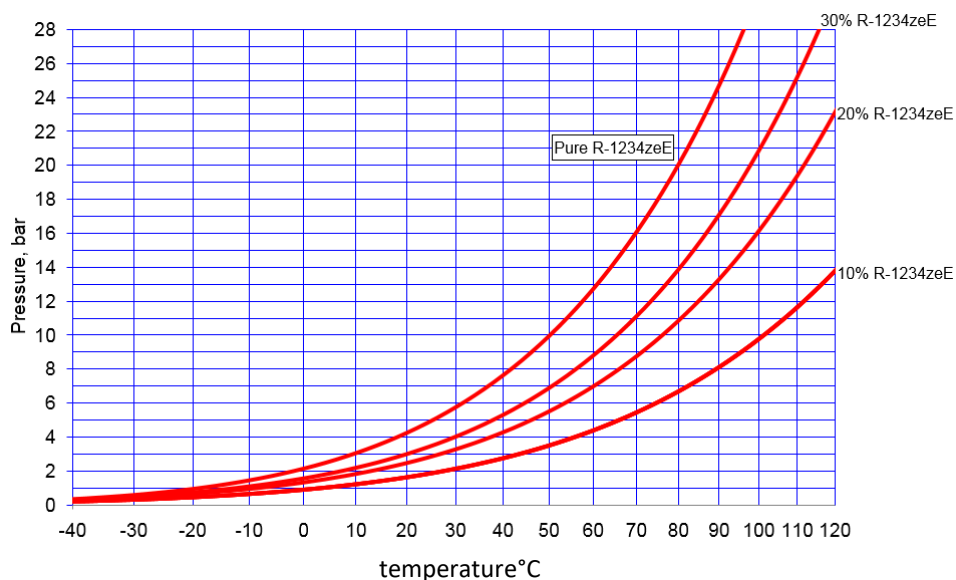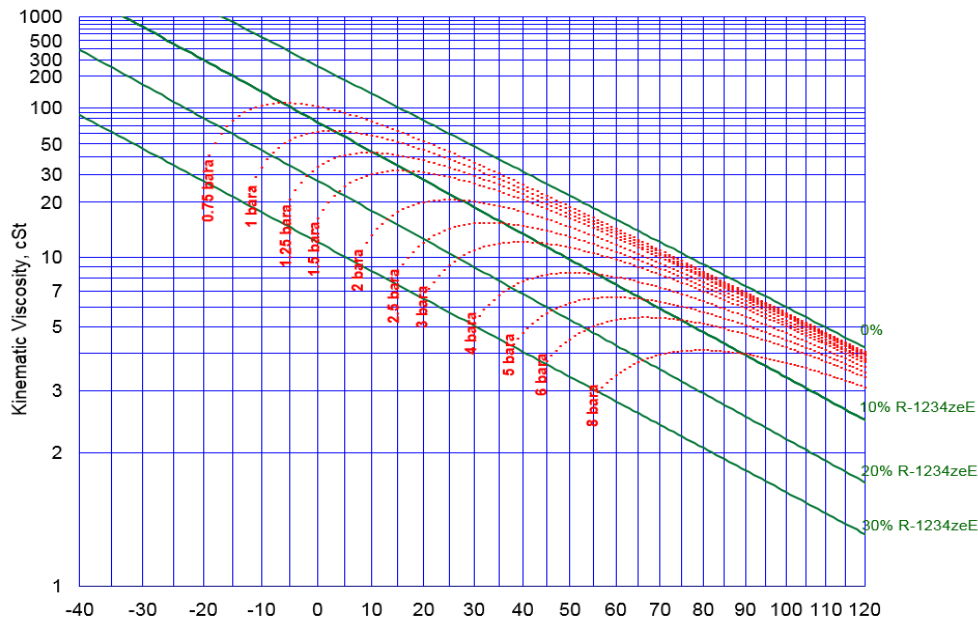


All % figures represent m% refrigerant in the refrigerant-oil-mixture.

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R1336mz-Z

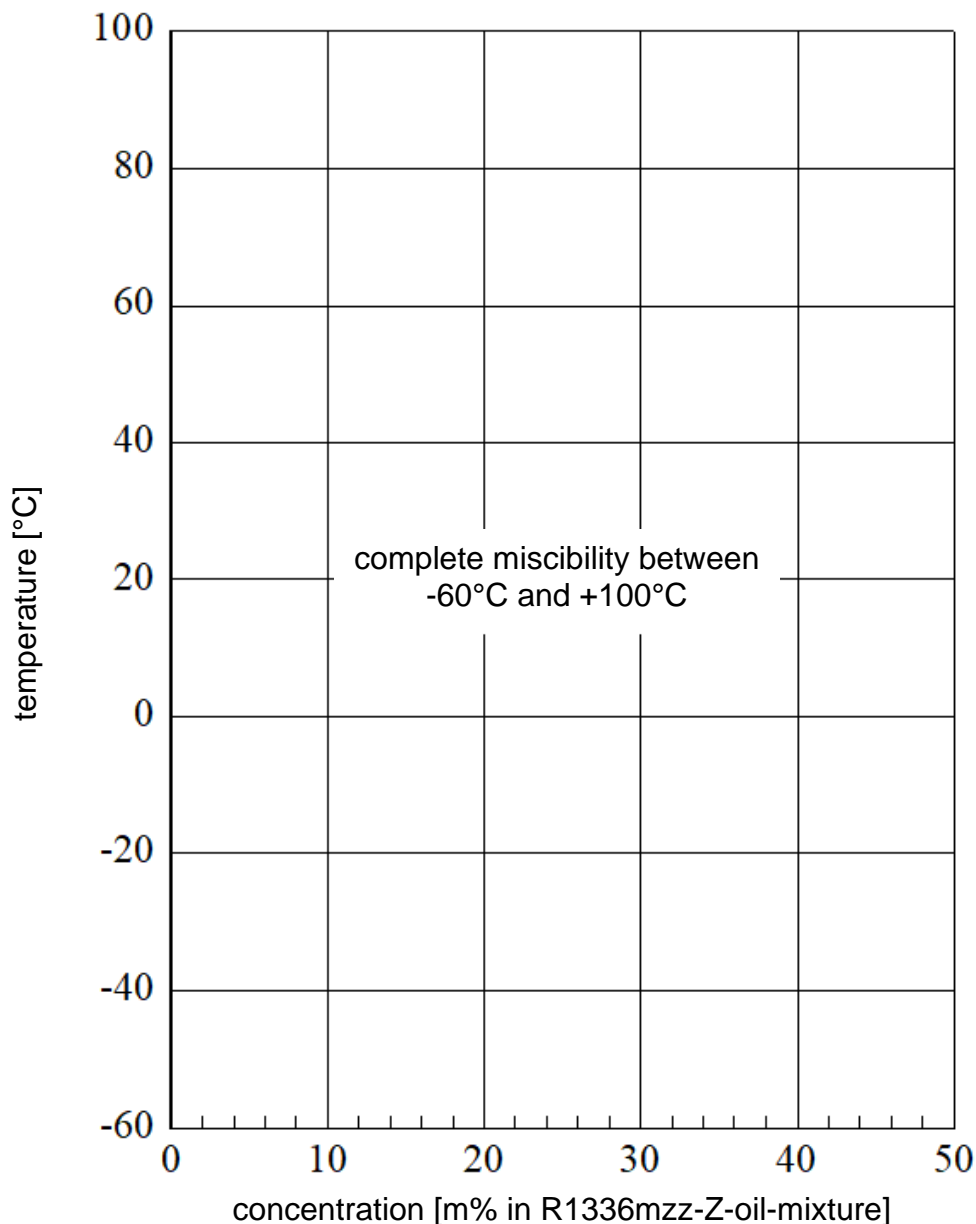

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R134A

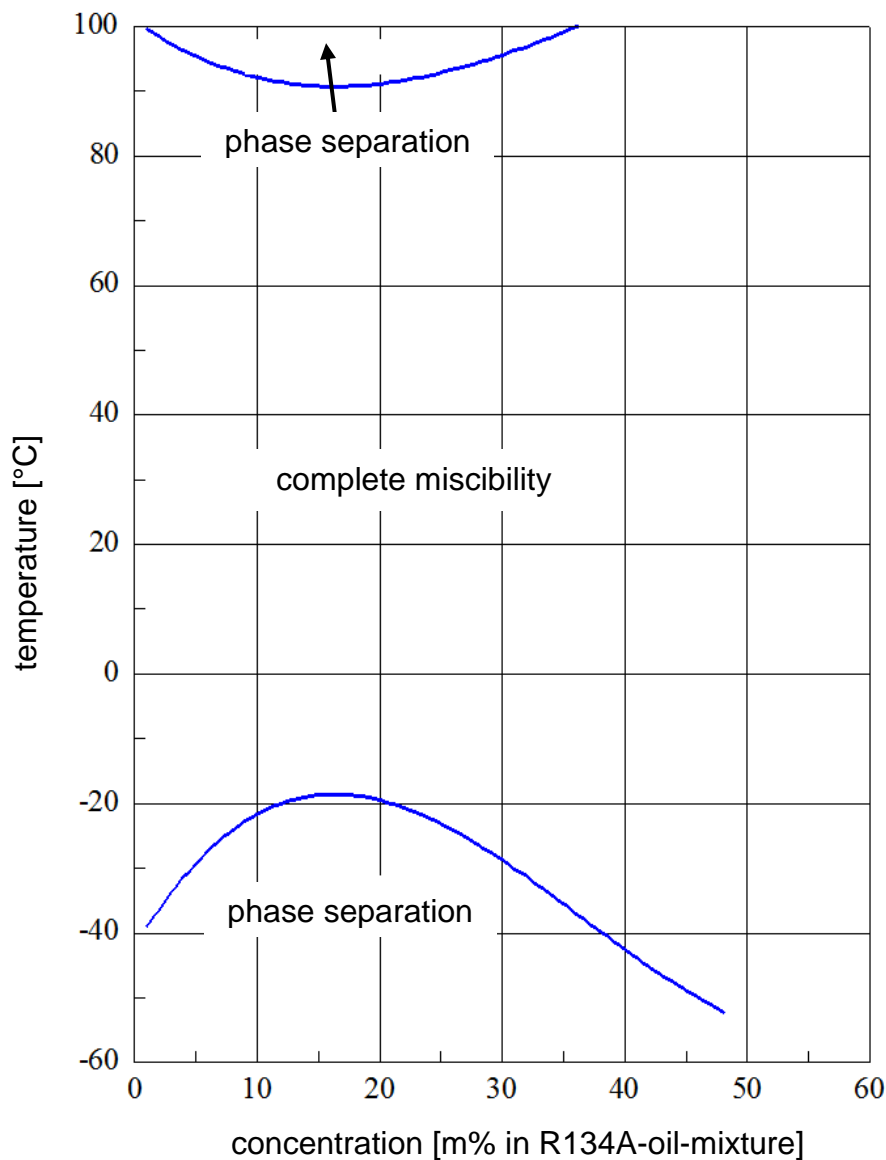

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R134A

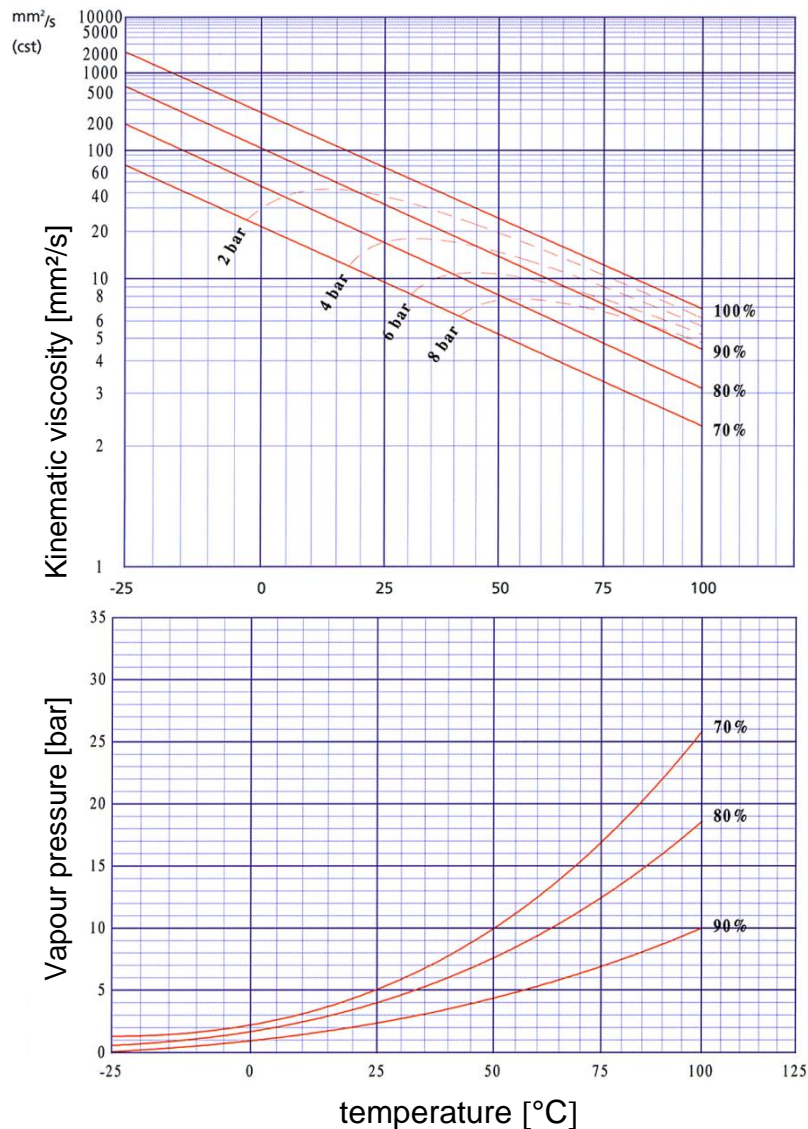


All % figures represent m% oil in the refrigerant-oil-mixture.

PI 4-1326, Page 10; PM 4 - 09.20

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R22

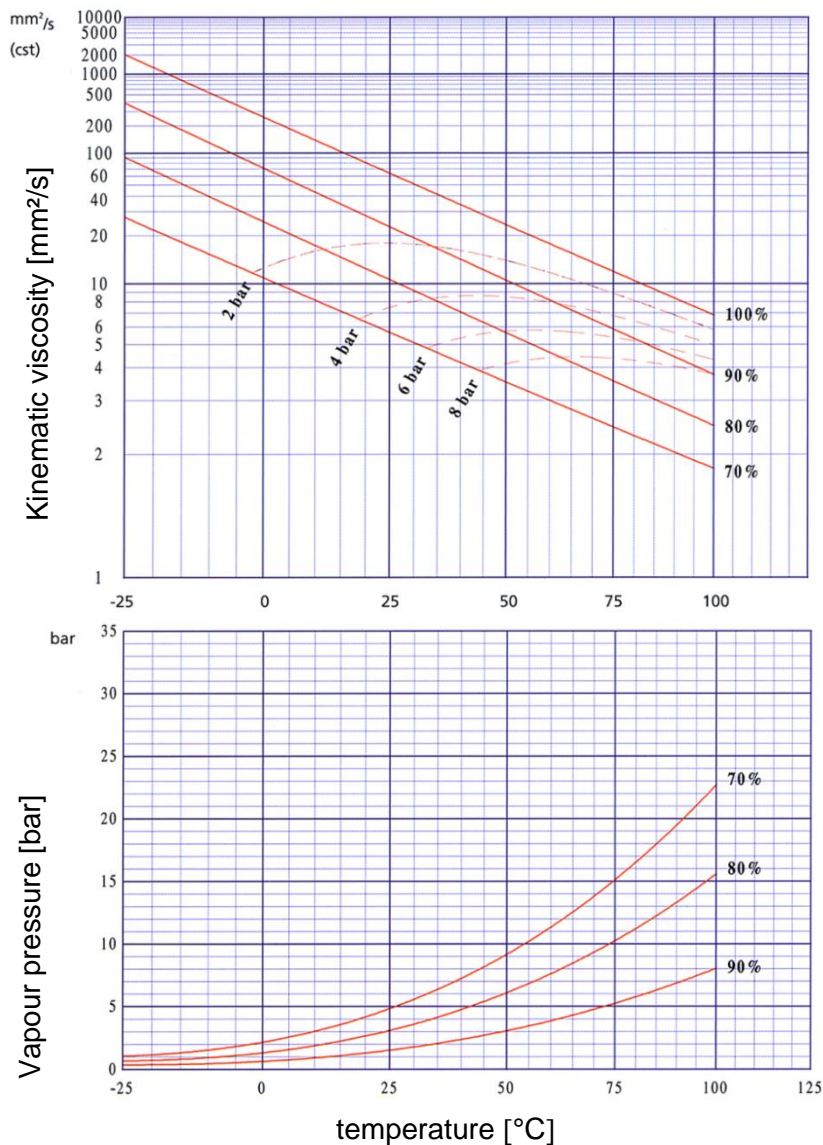


All % figures represent m% oil in the refrigerant-oil-mixture.

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R23

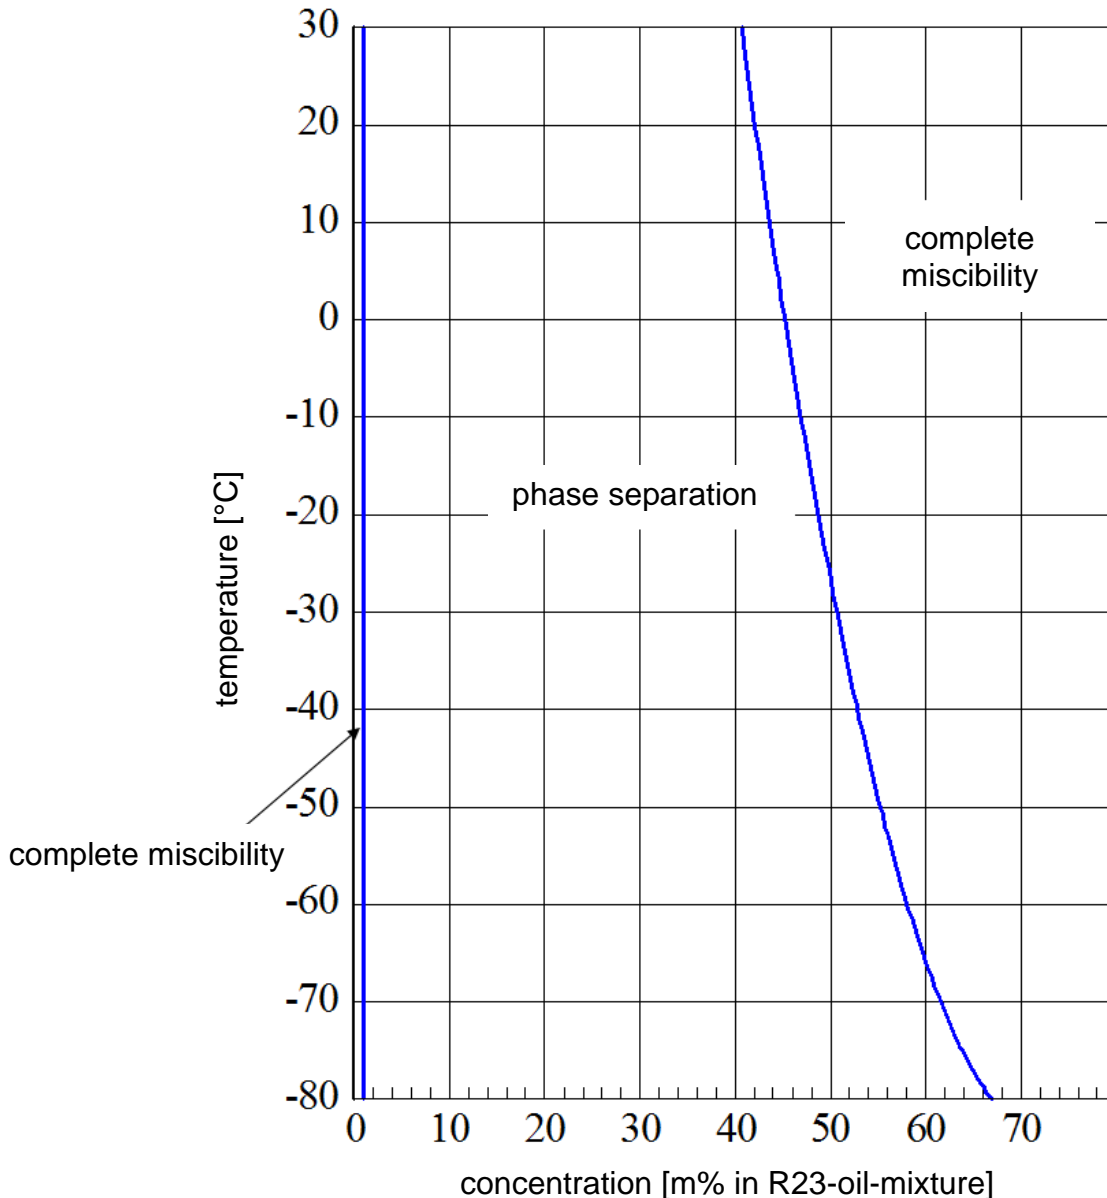

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R32

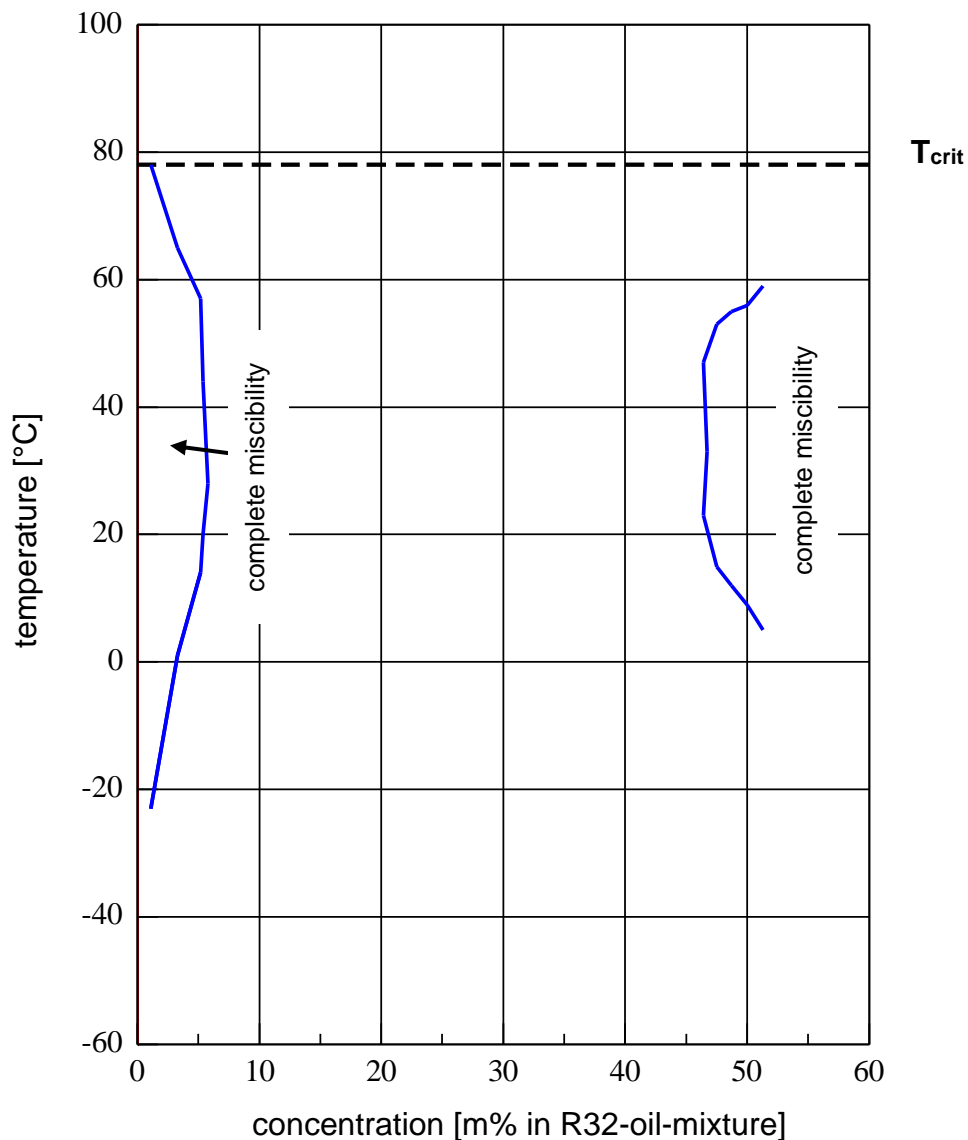

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R32

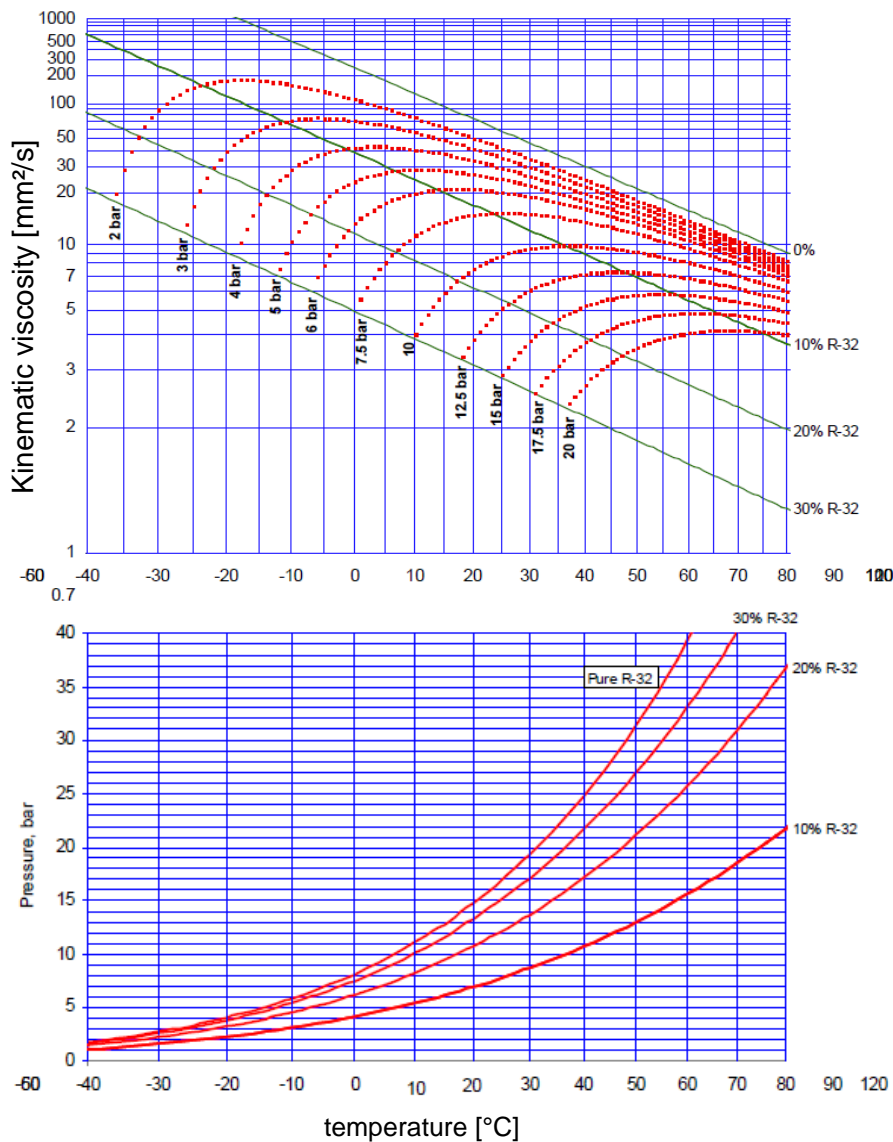


All % figures represent m% refrigerant in the refrigerant-oil-mixture.

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R404A

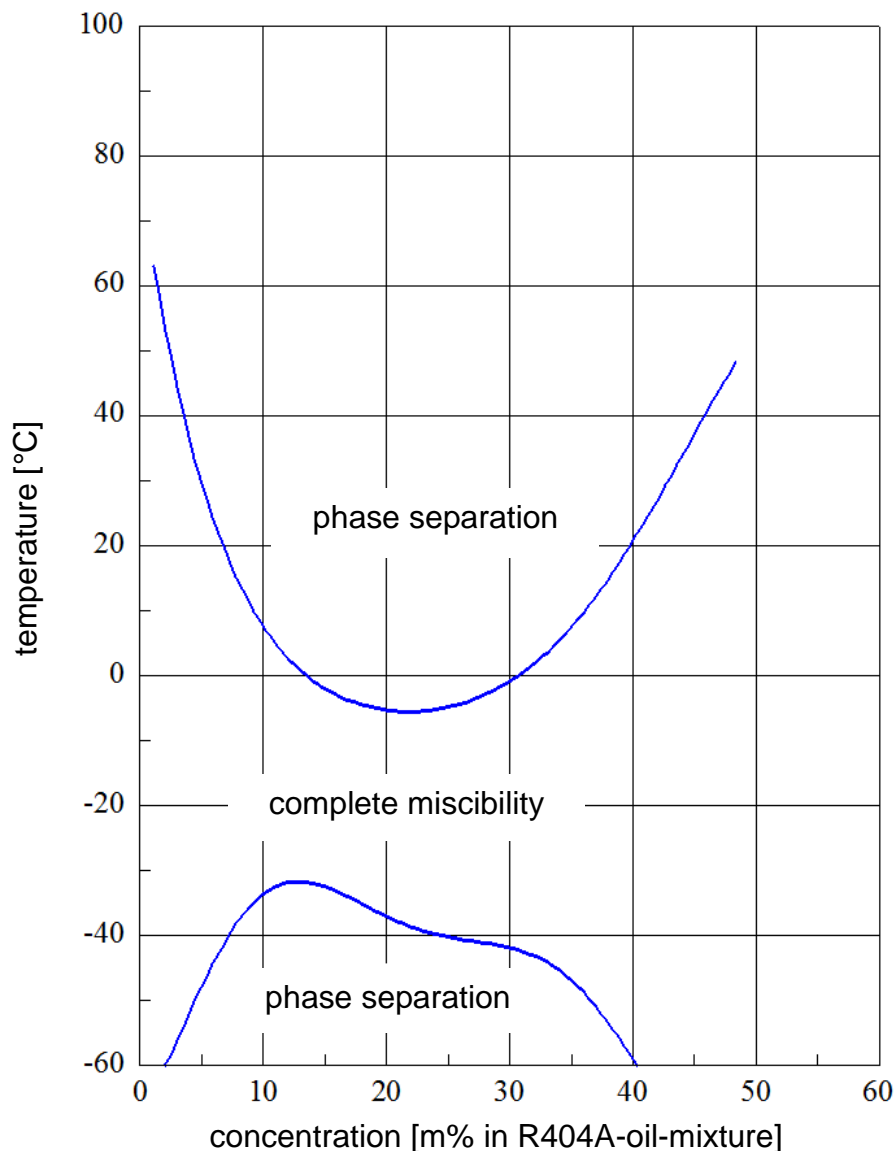

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R404A

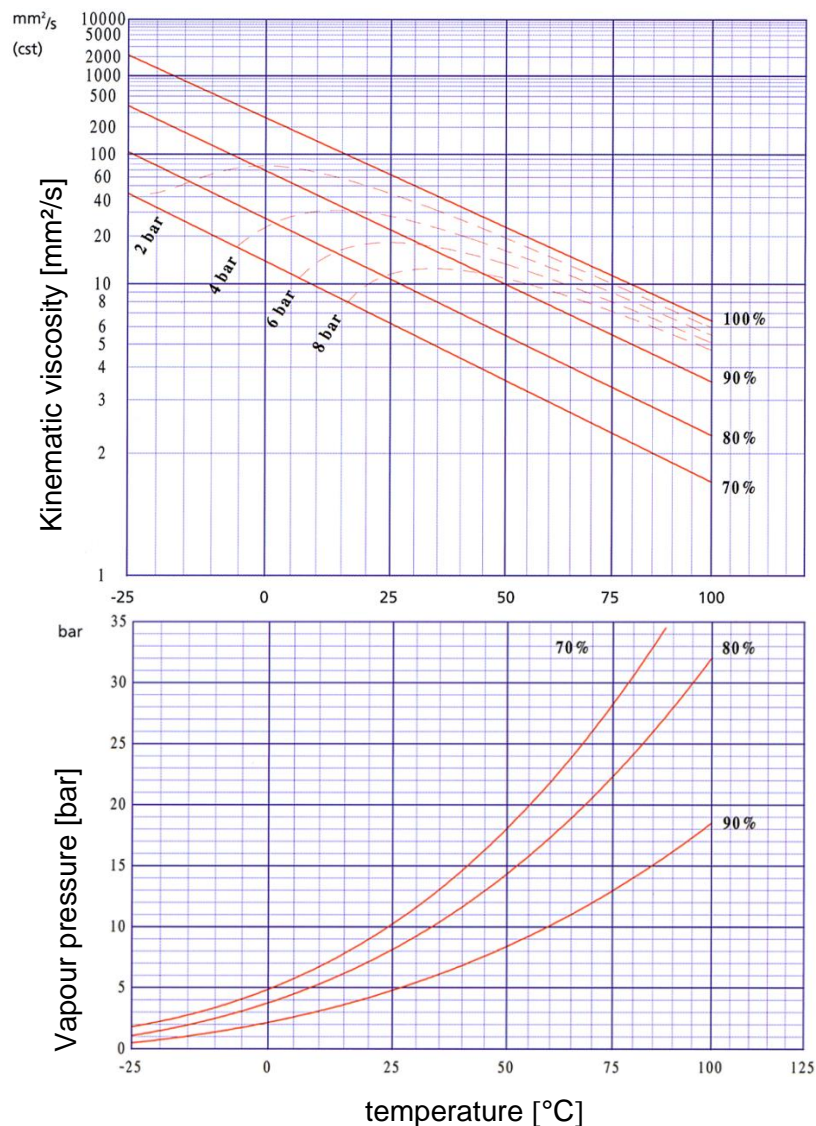


All % figures represent m% oil in the refrigerant-oil-mixture.

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R407C

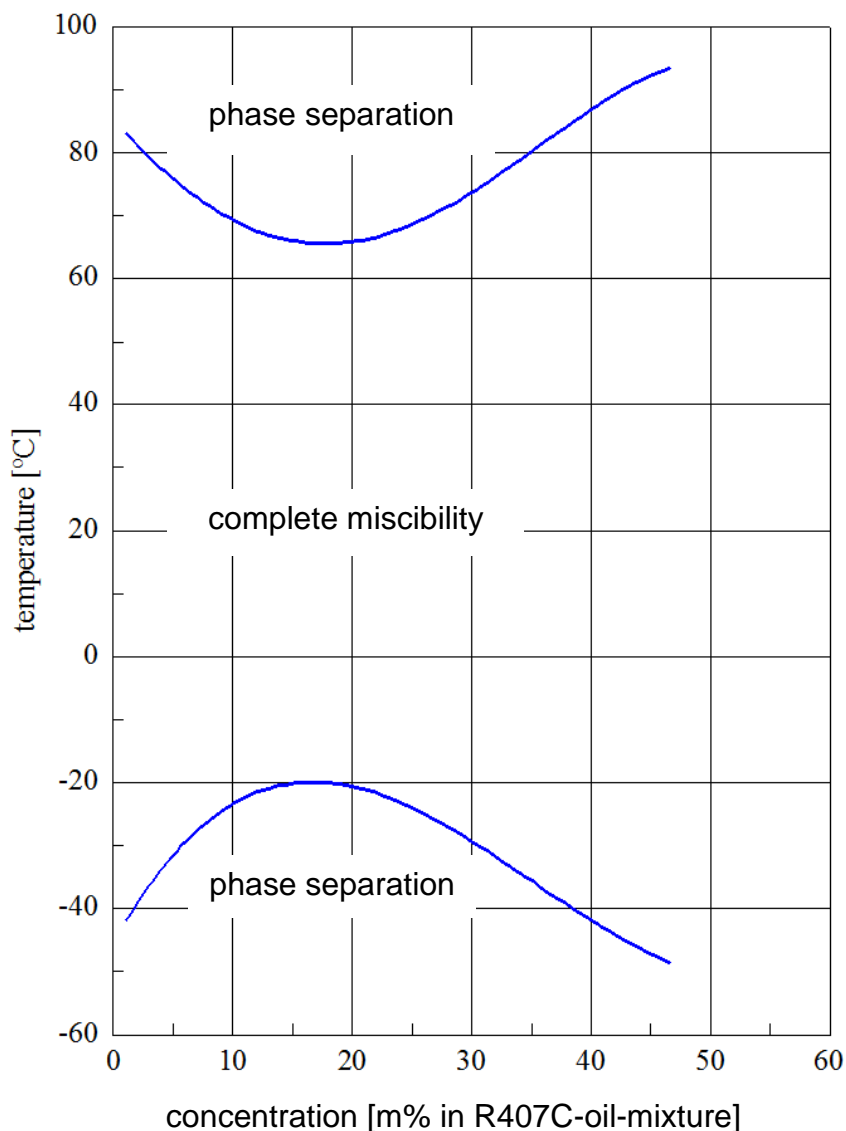

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R407C

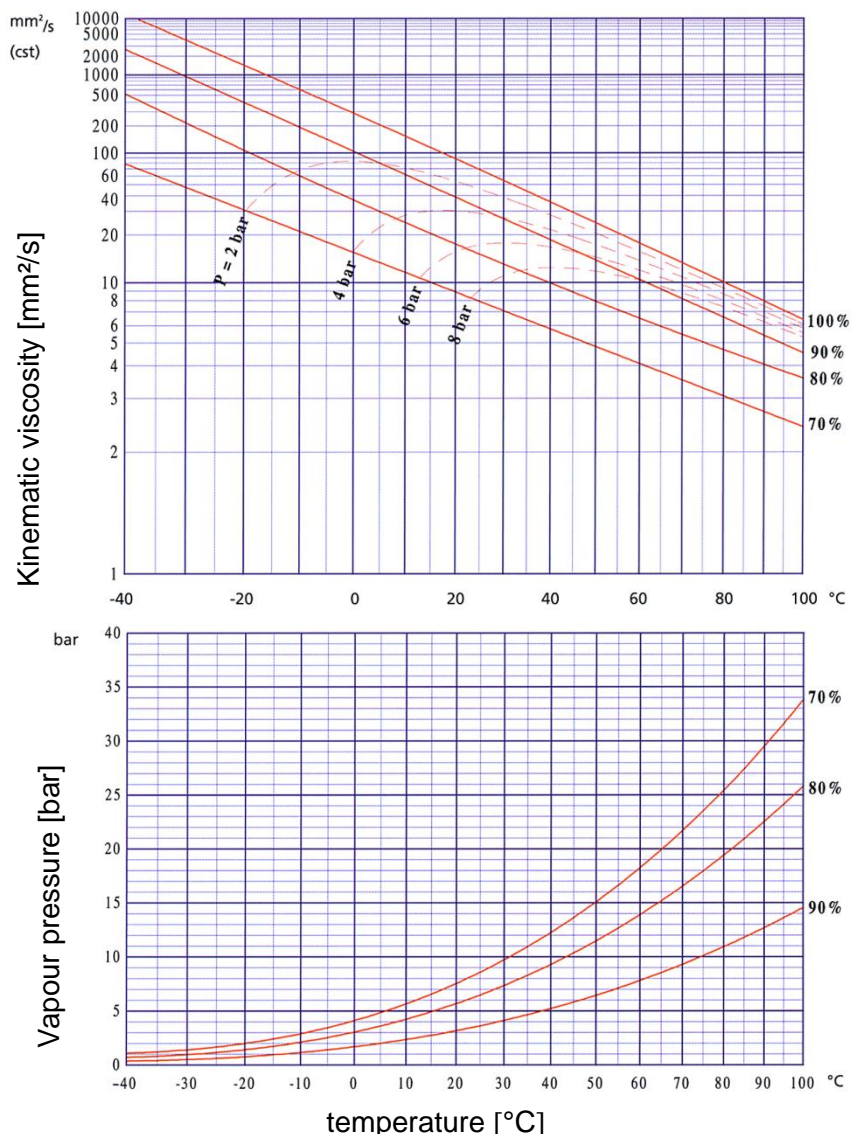


All % figures represent m% oil in the refrigerant-oil-mixture.

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R407F

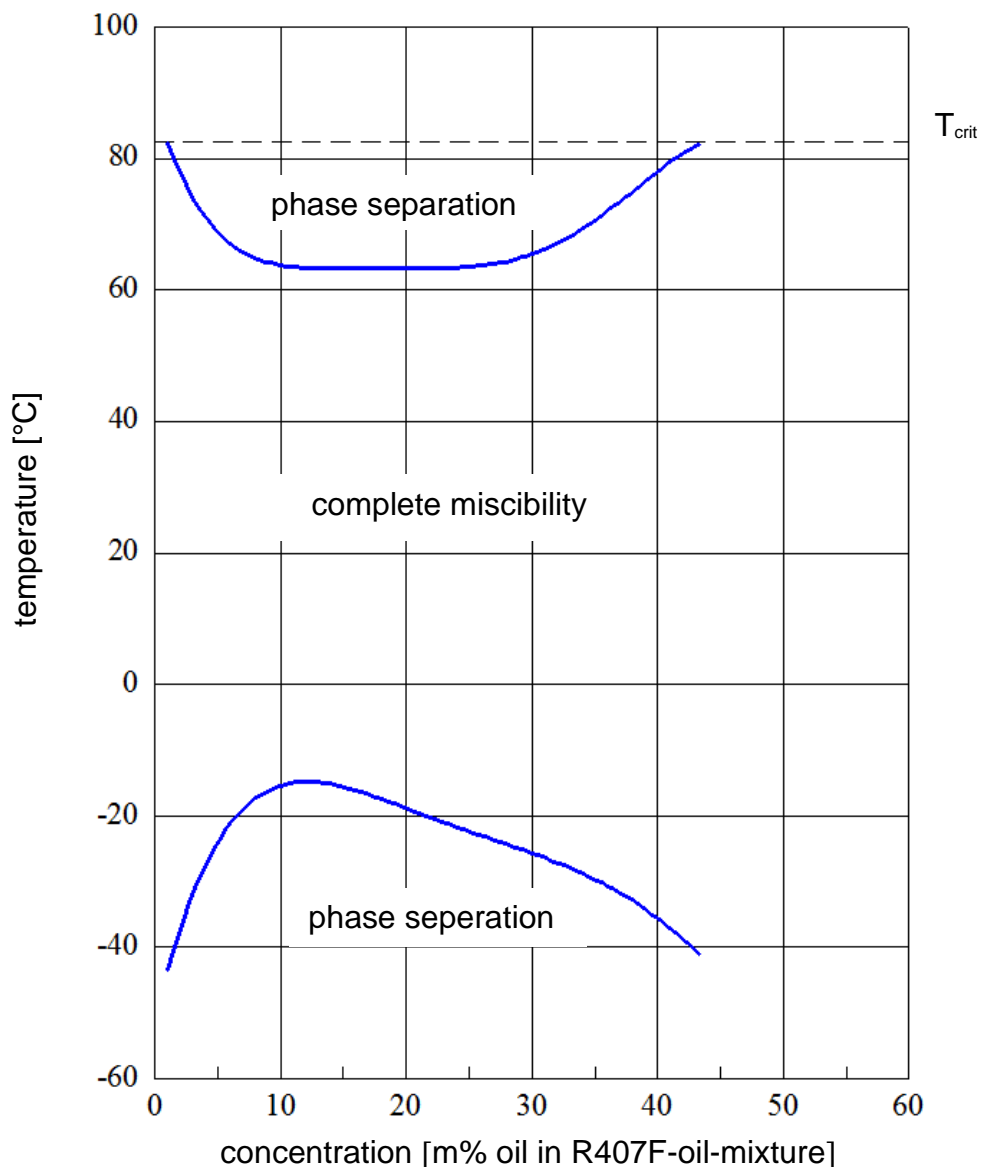

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R407F

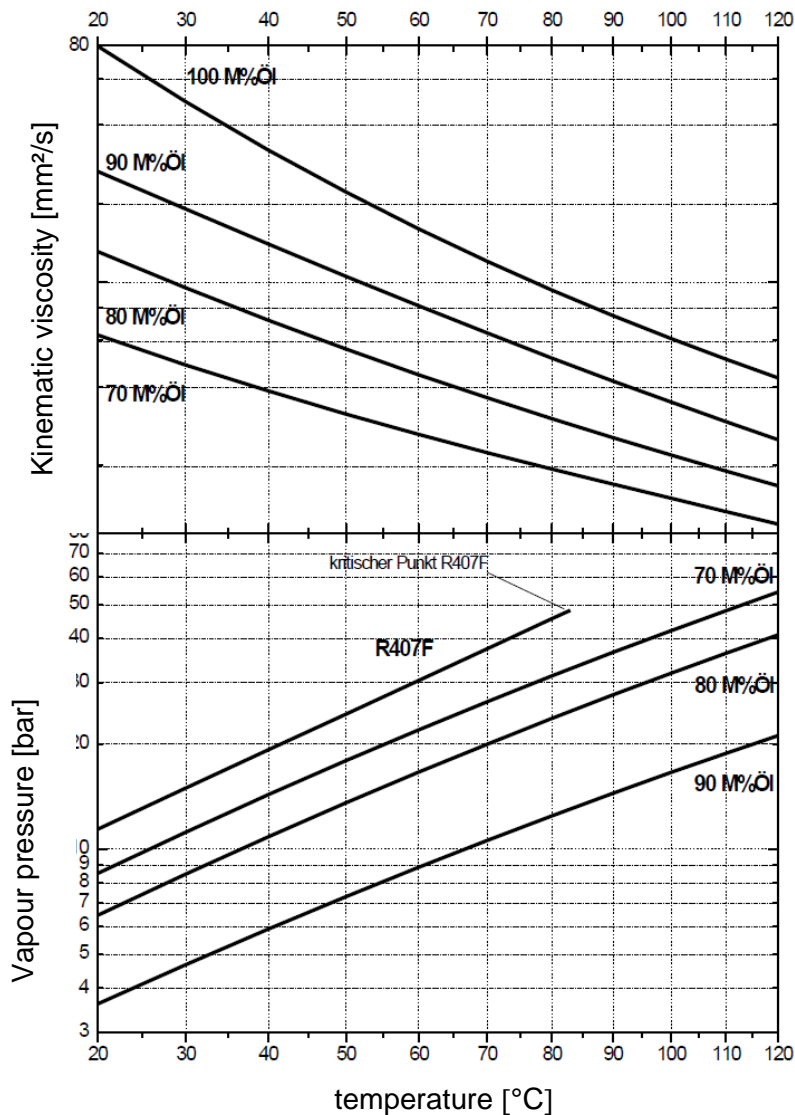


All % figures represent m% oil in the refrigerant-oil-mixture.

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R410A

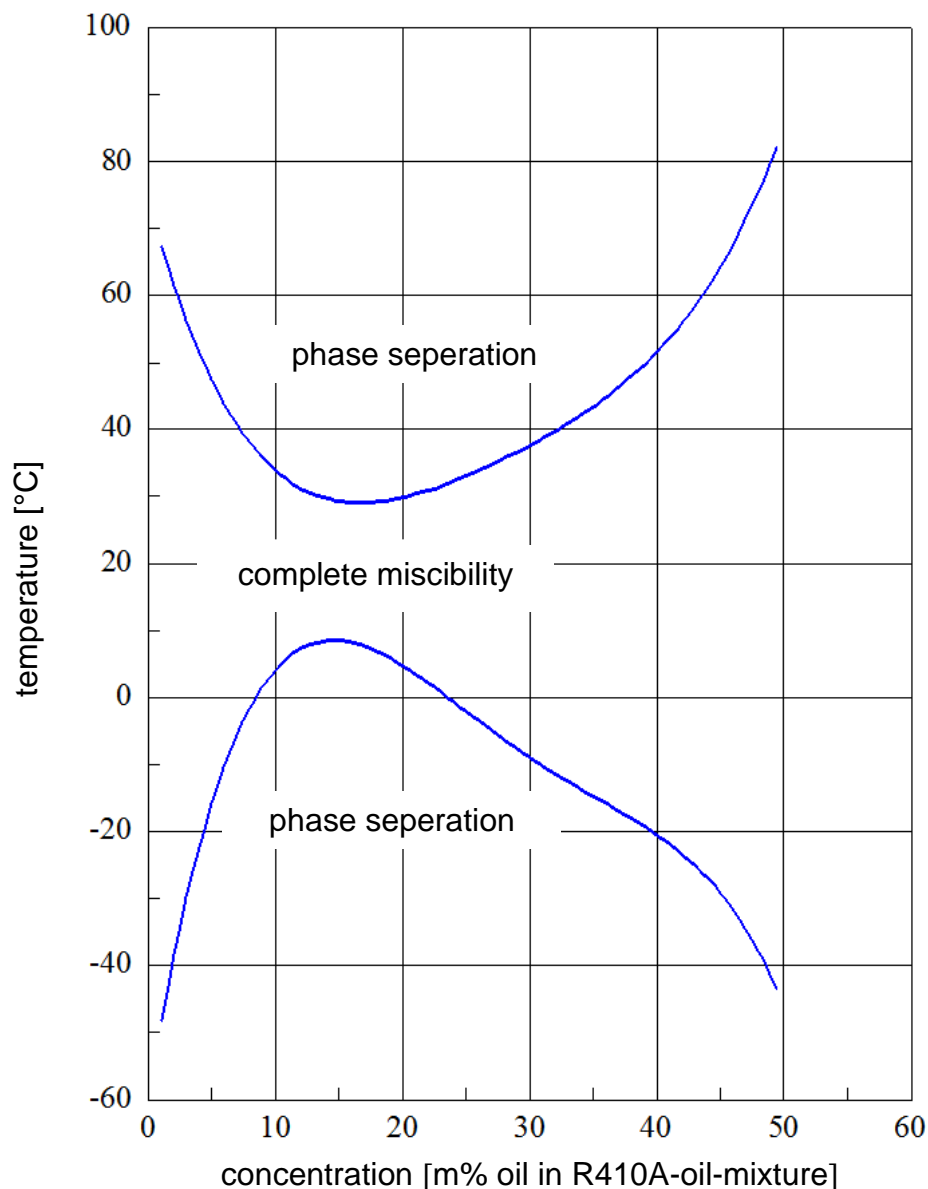


PI 4-1326, Page 21; PM 4 - 09.20

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R410A

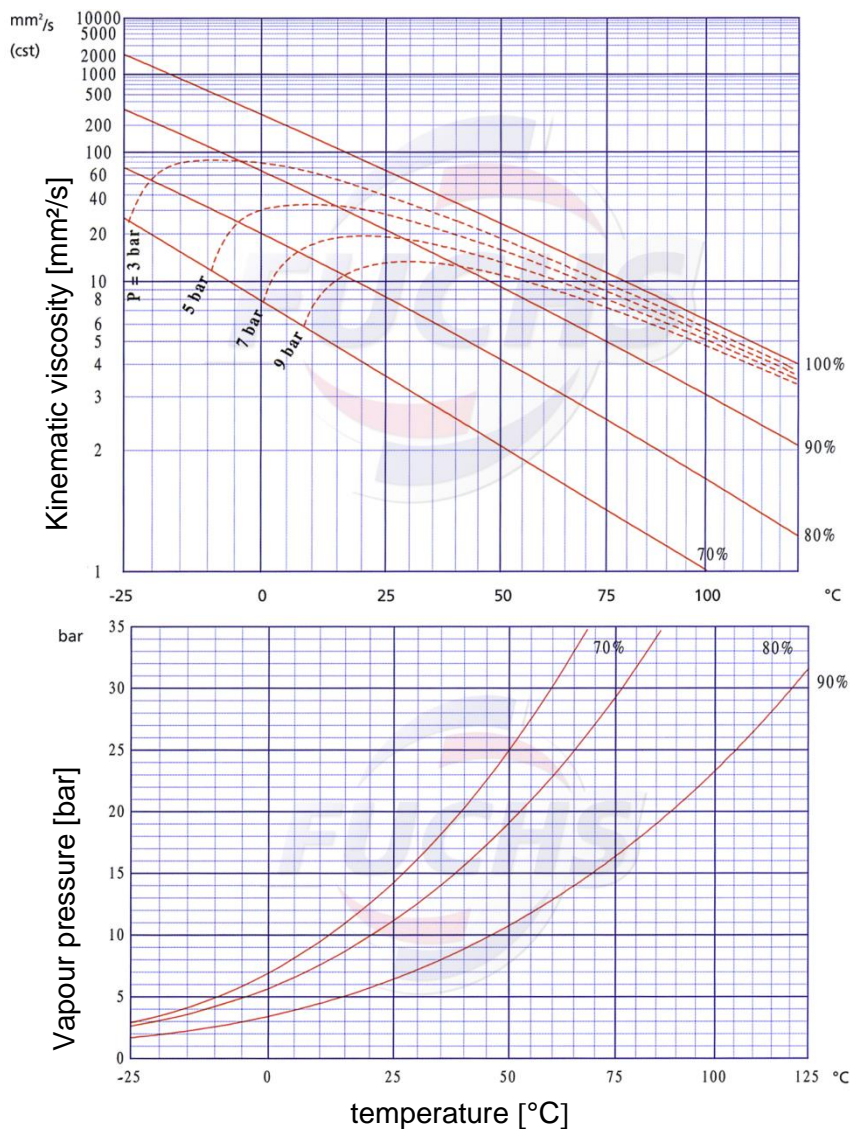


All % figures represent m% oil in the refrigerant-oil-mixture.

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R417A

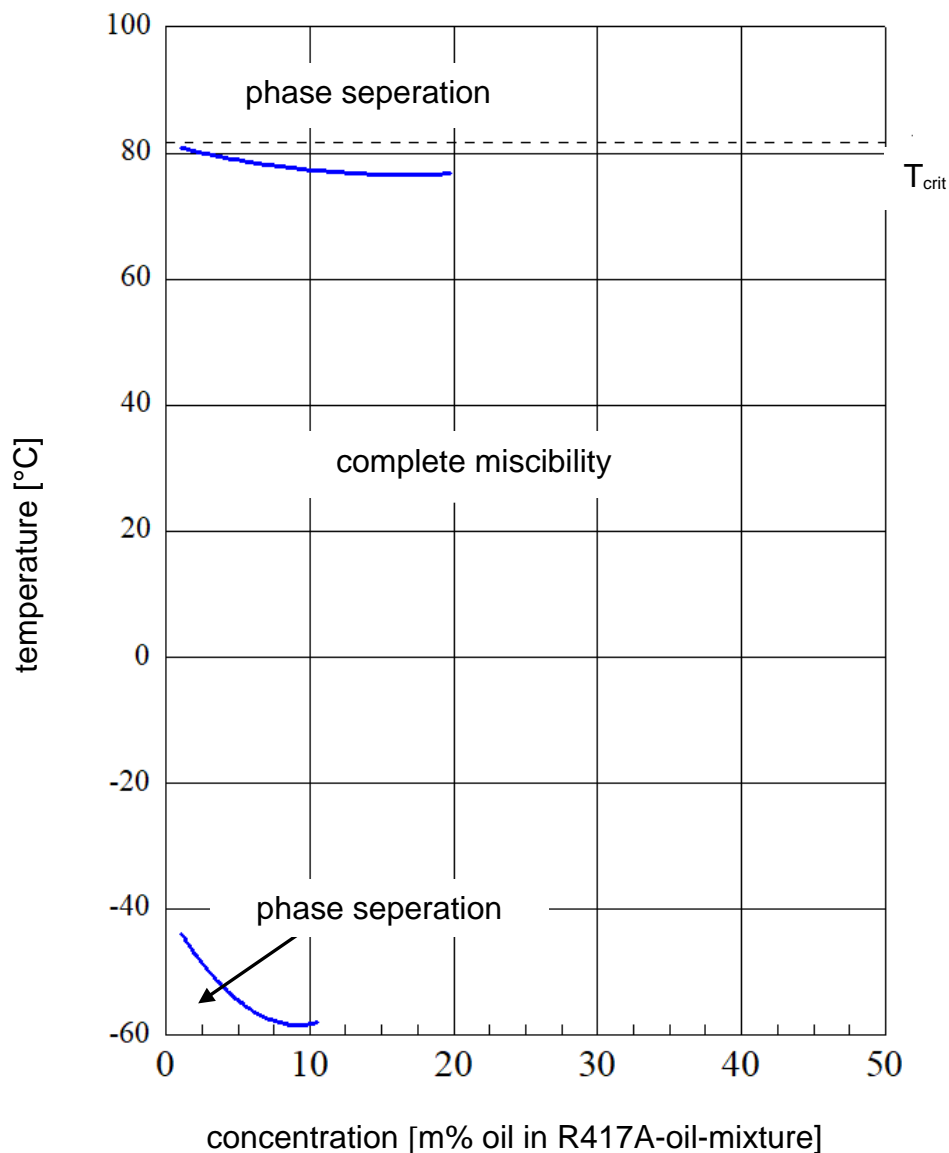

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R422D

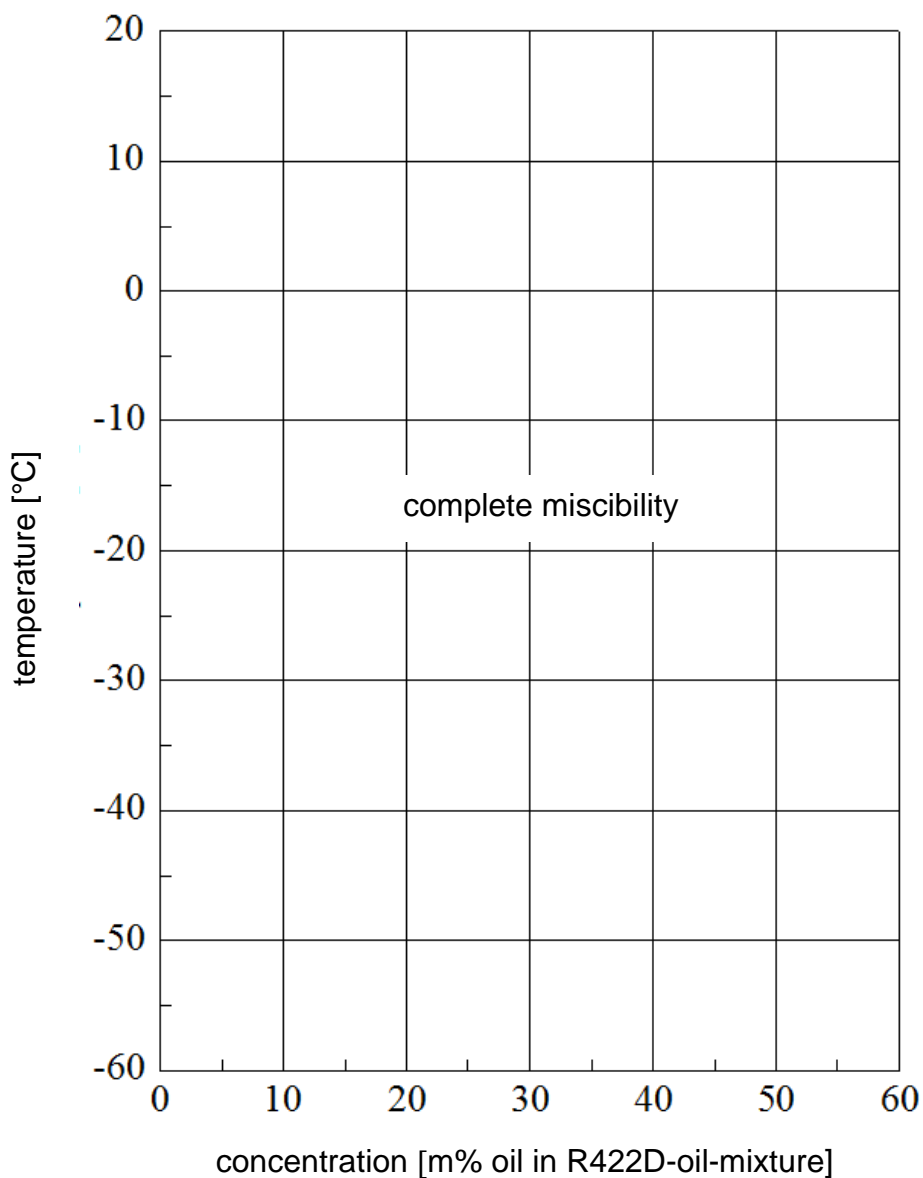

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R427A

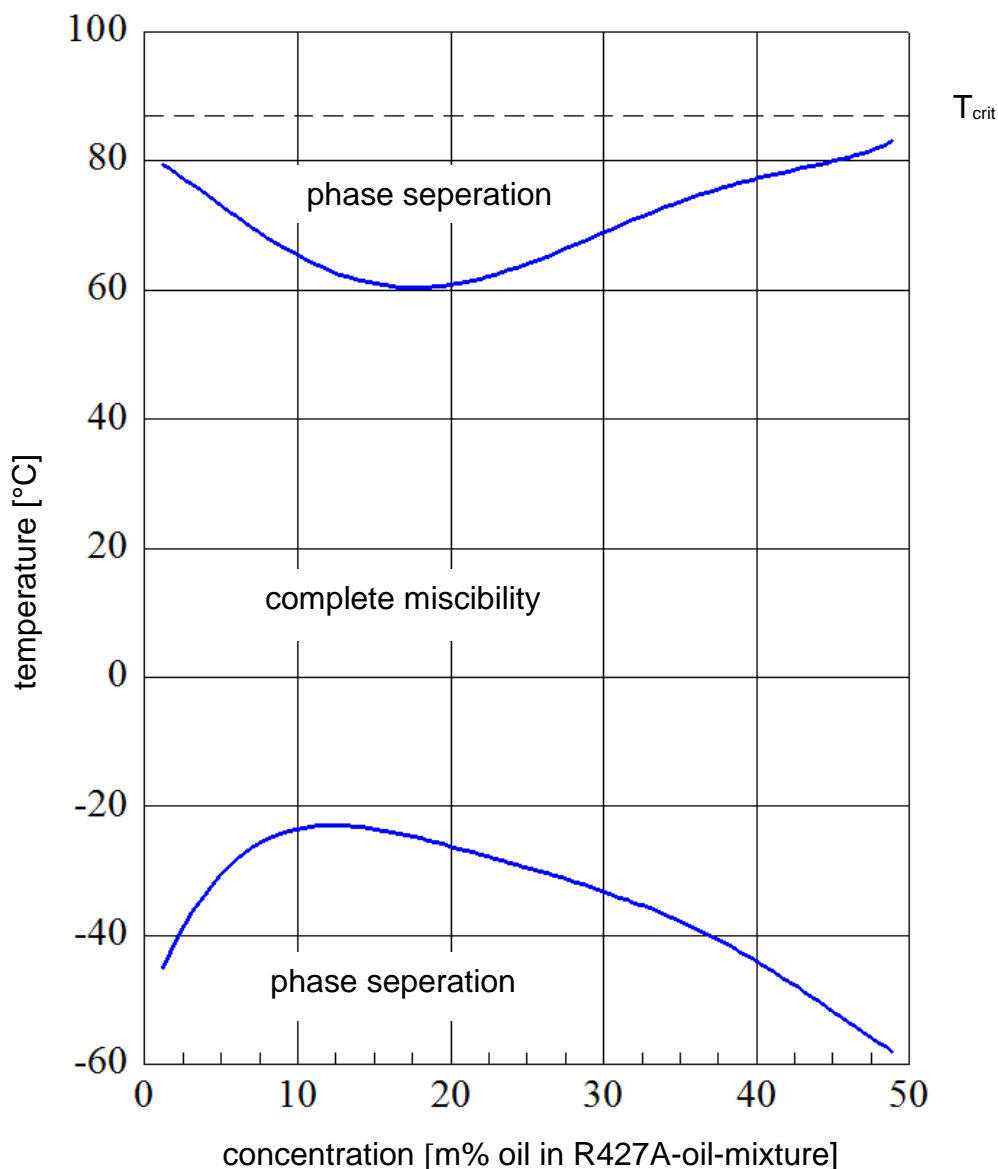

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R437A

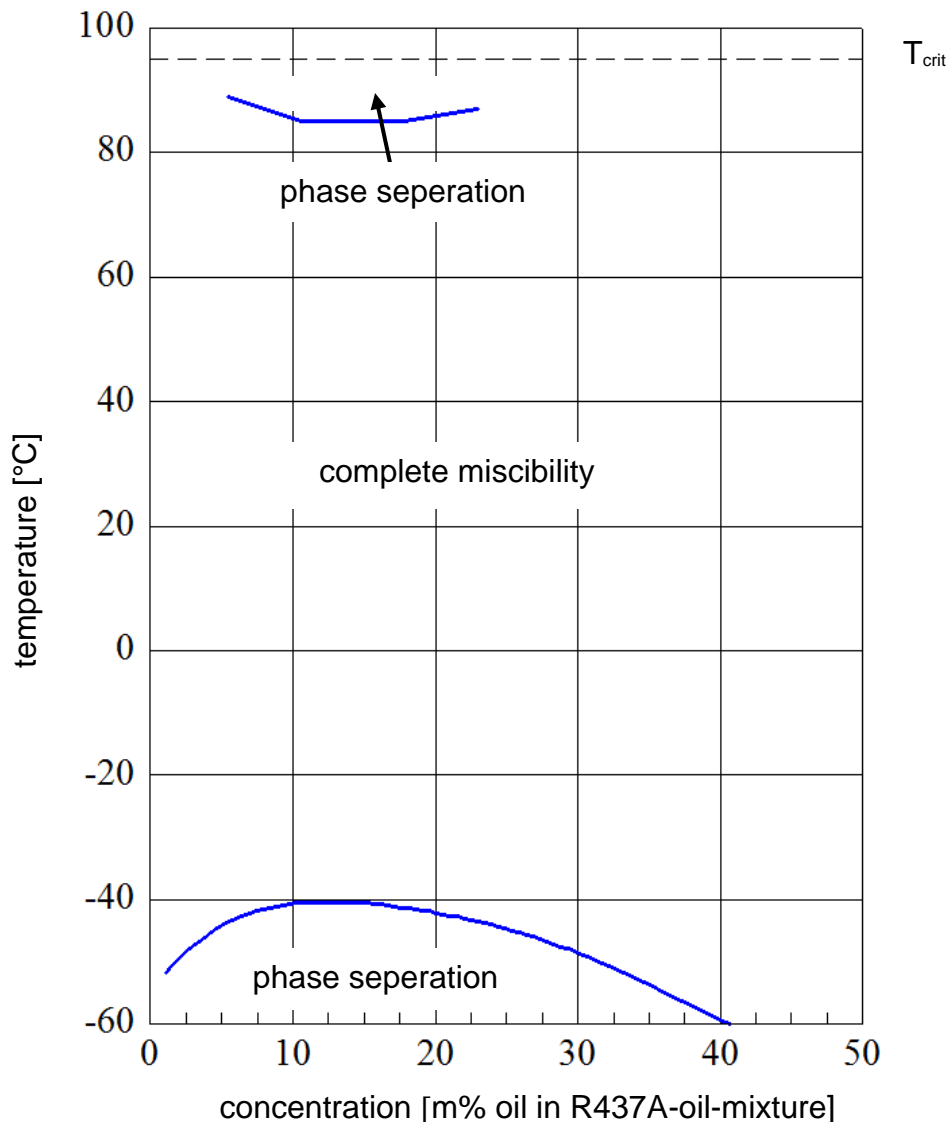

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.



Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R448A

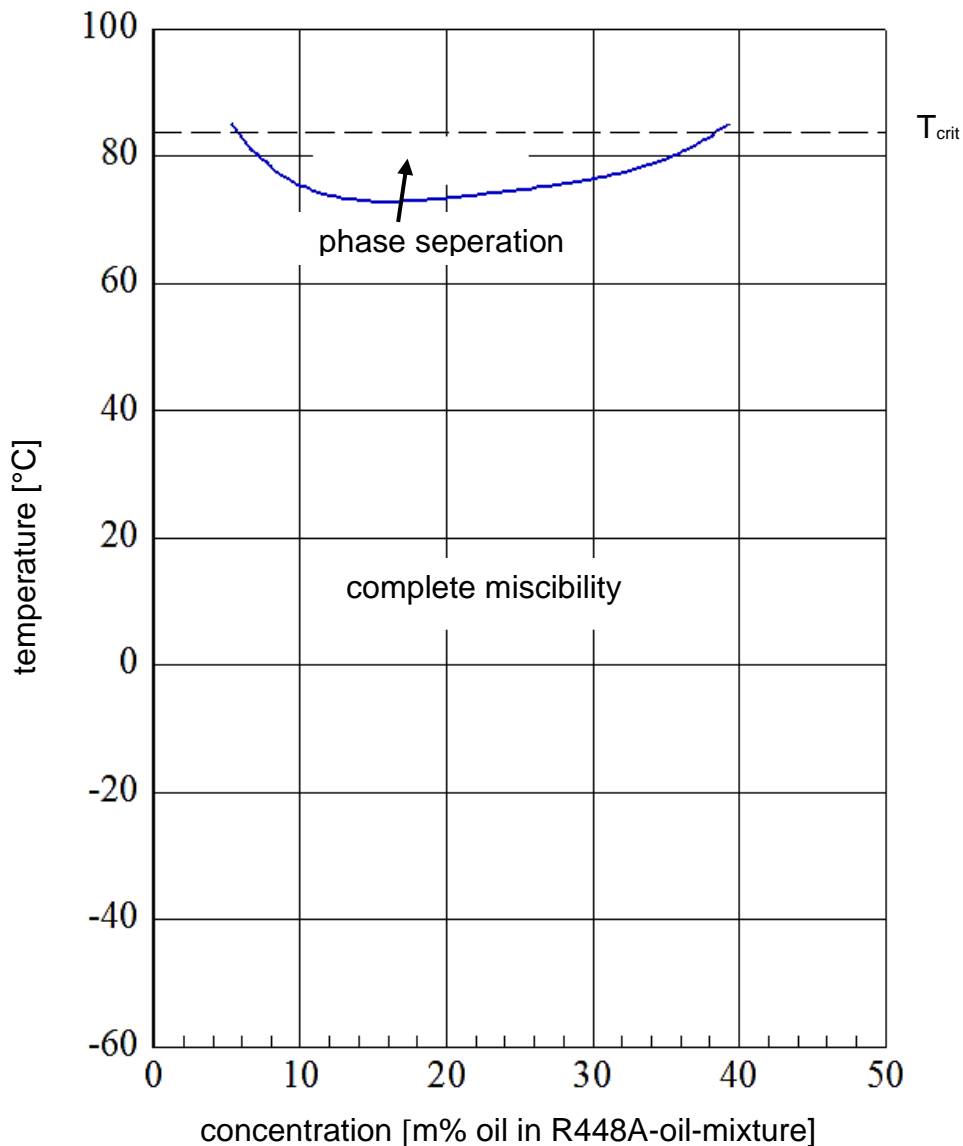

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R448A

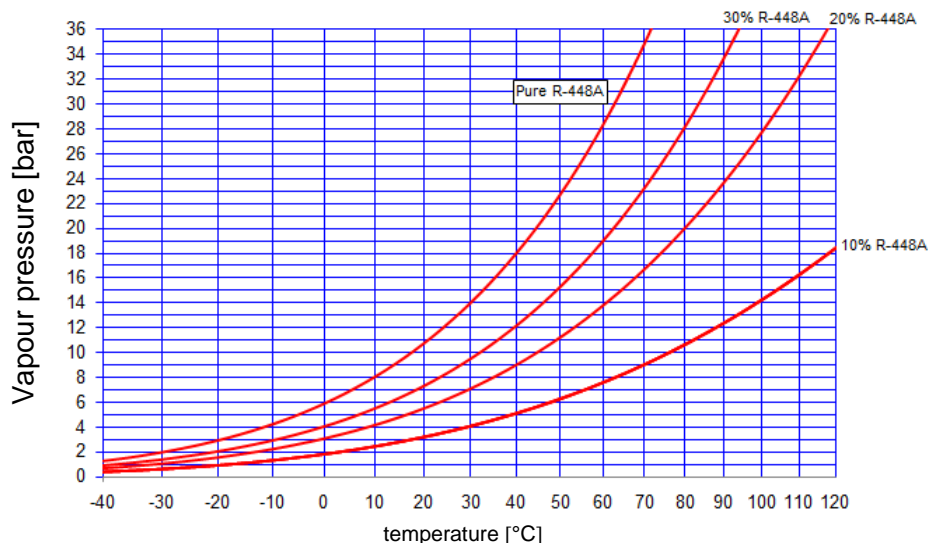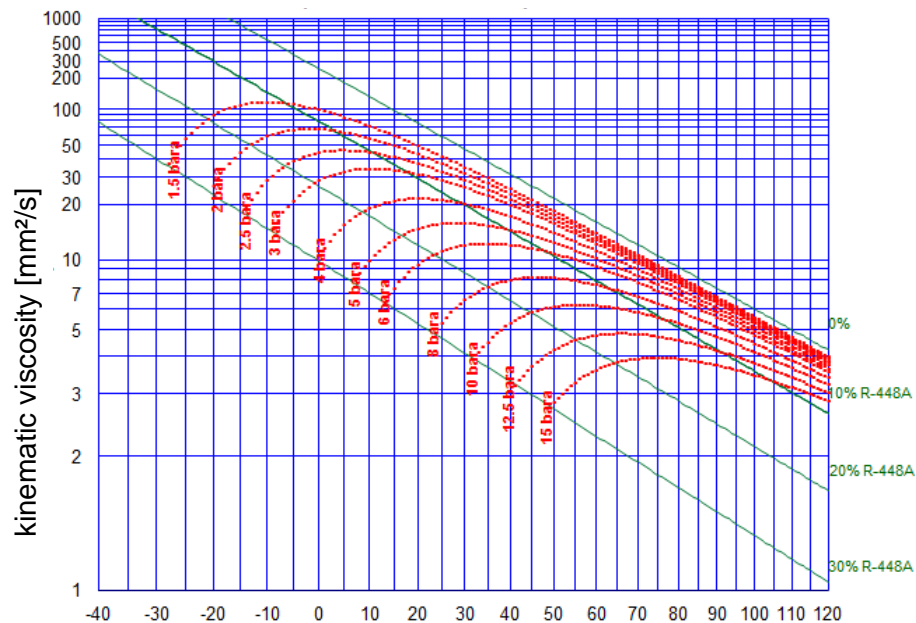


All % figures represent m% refrigerant in the refrigerant-oil-mixture.

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R449A

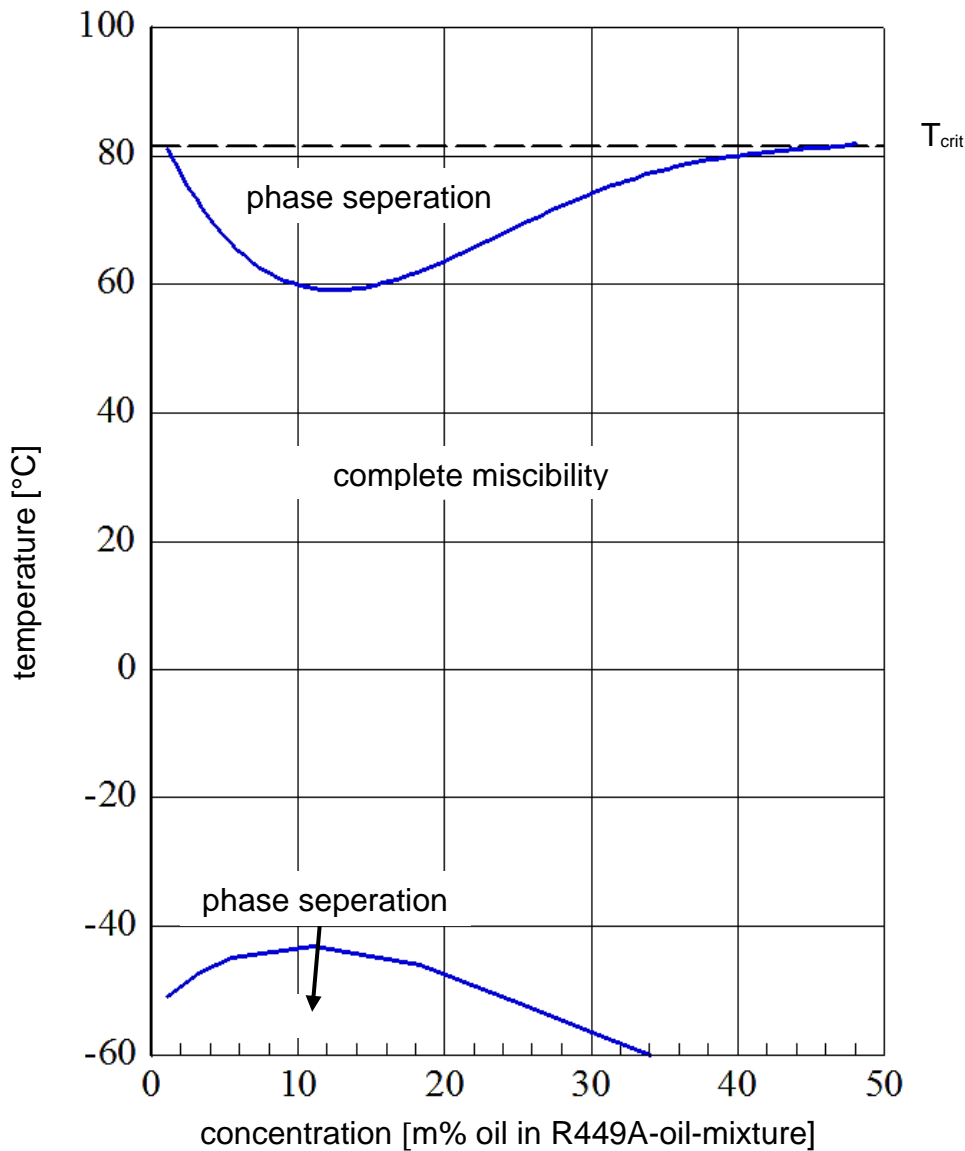

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R450A

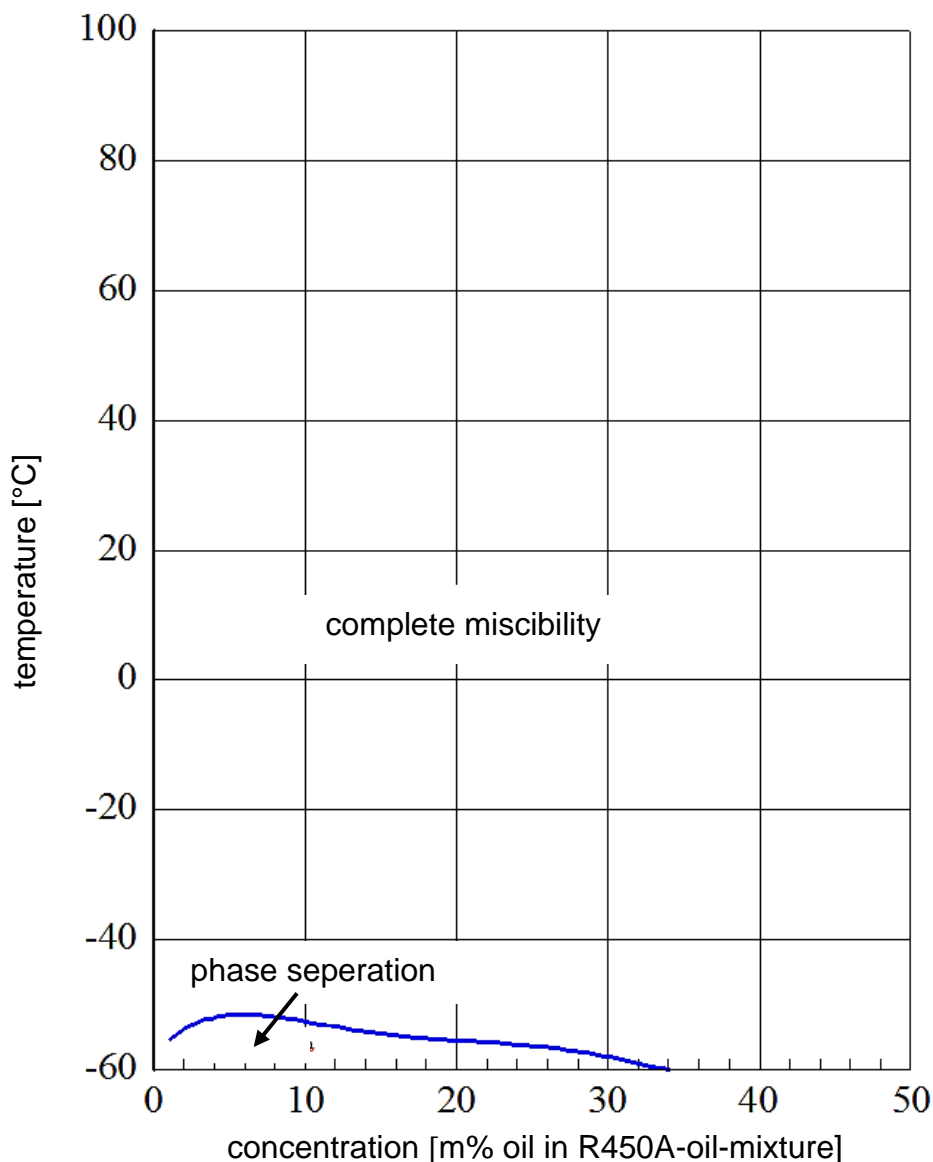

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R452A

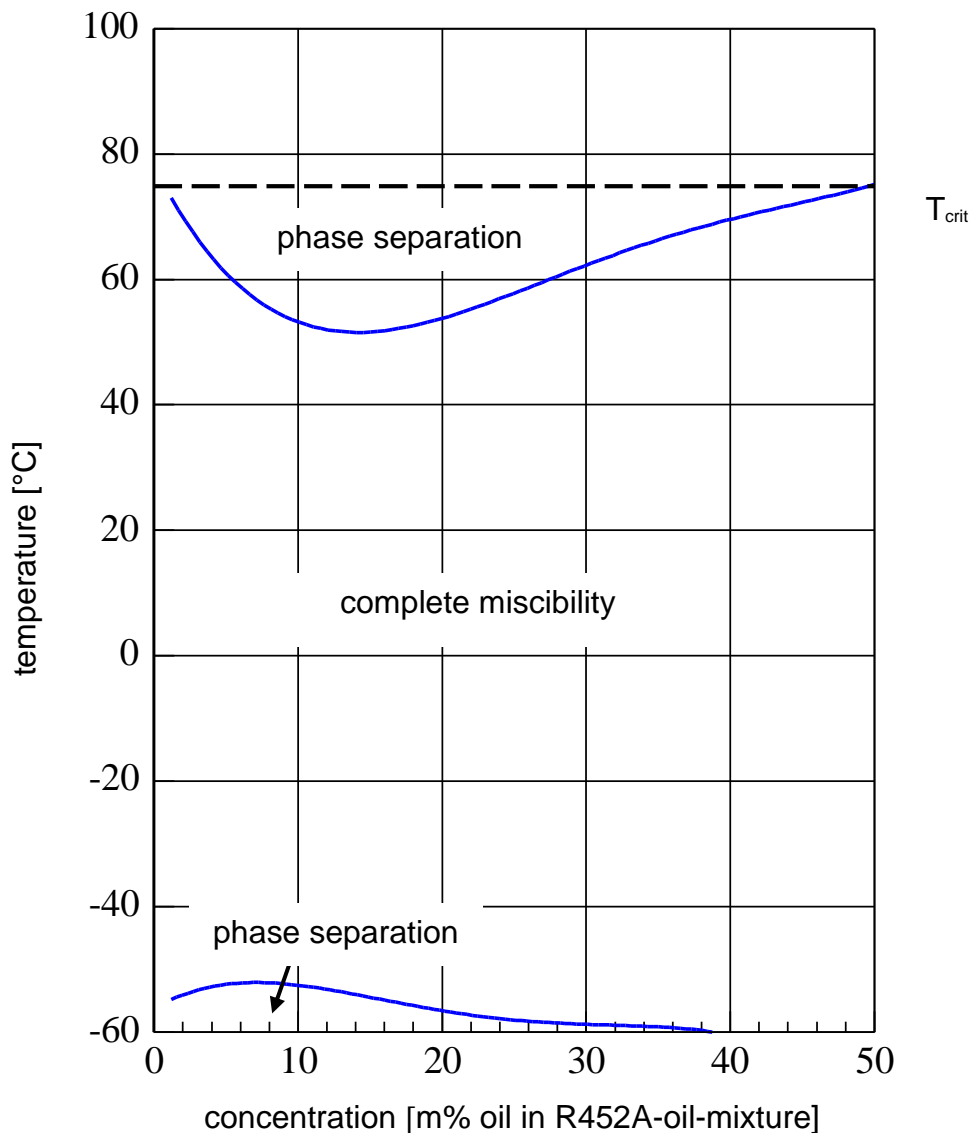

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R452B

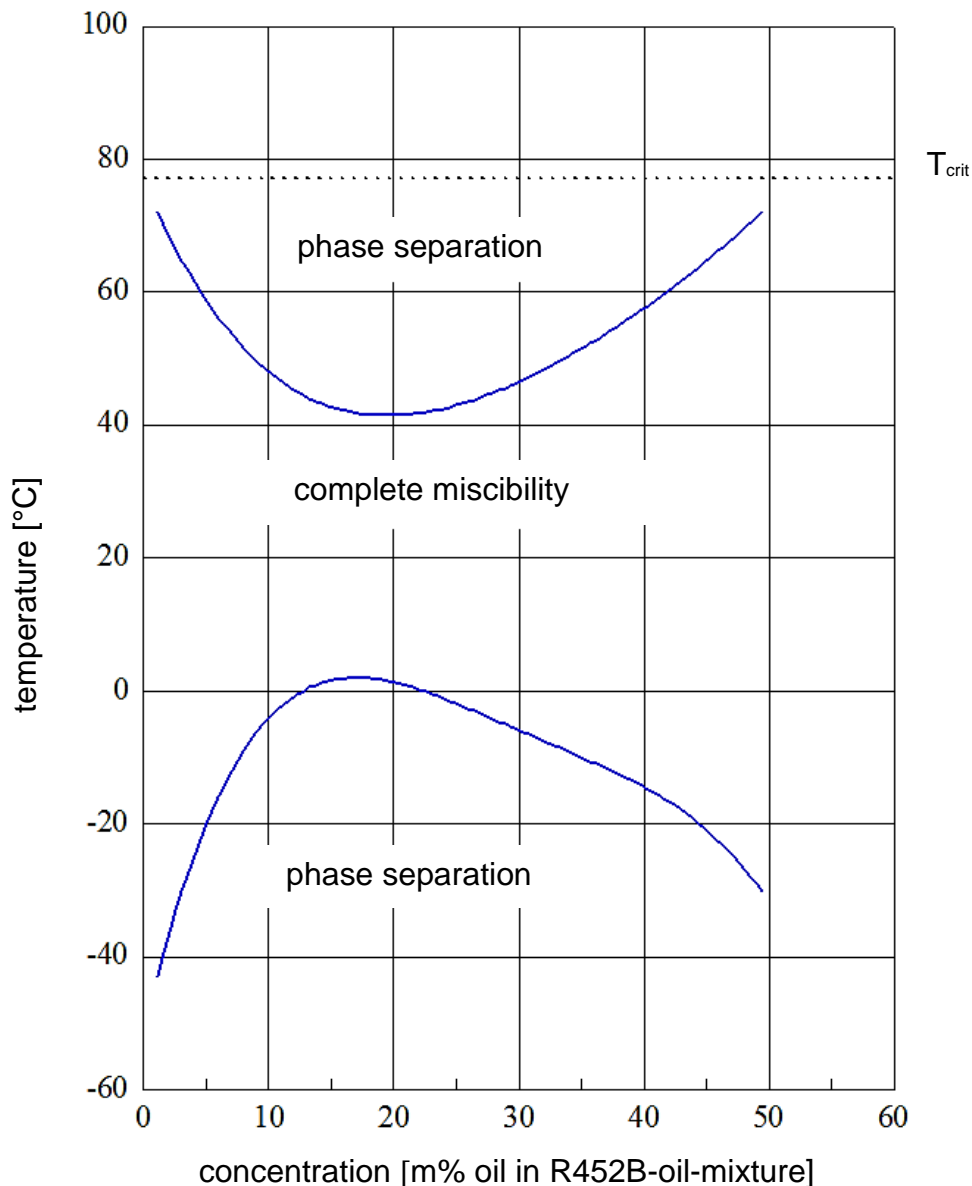

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R454A

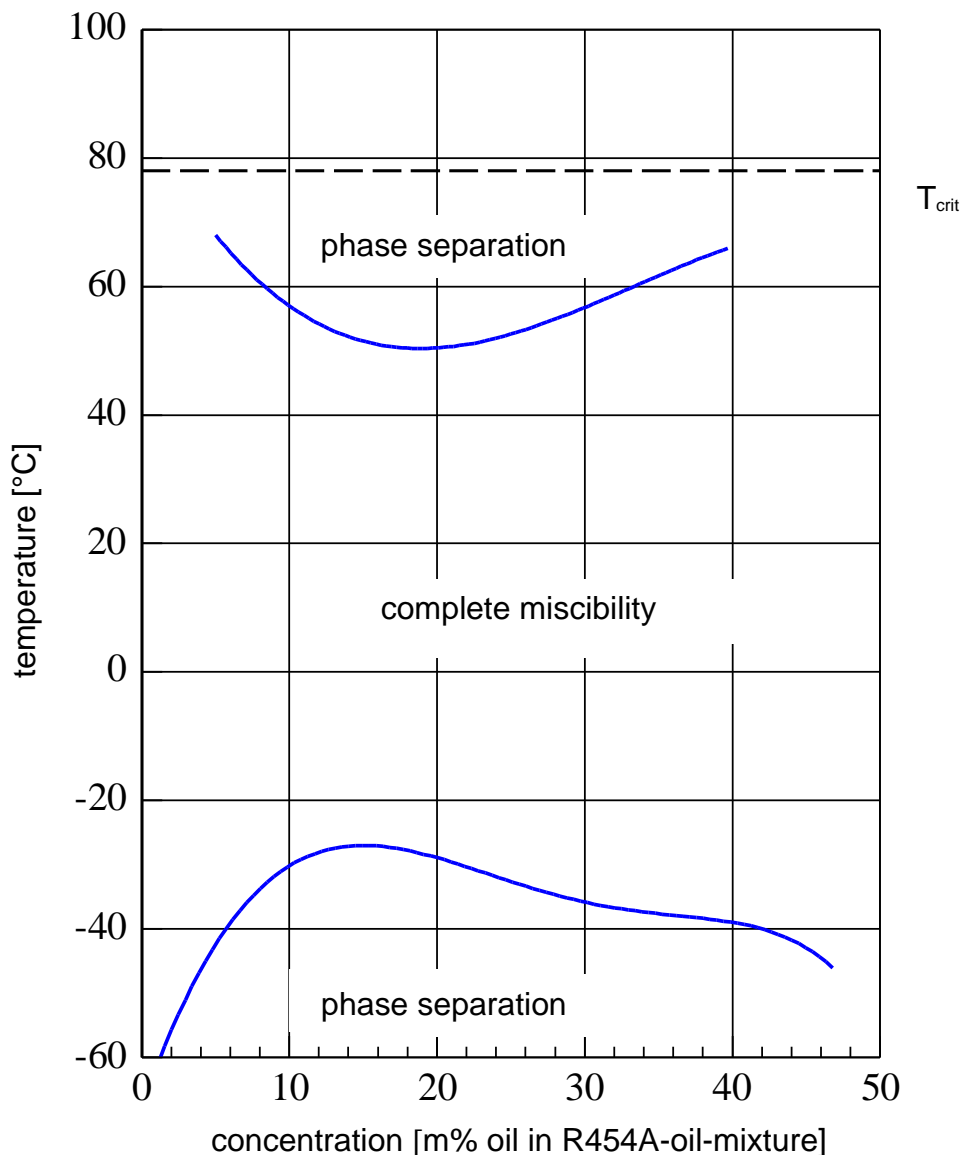

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R454B

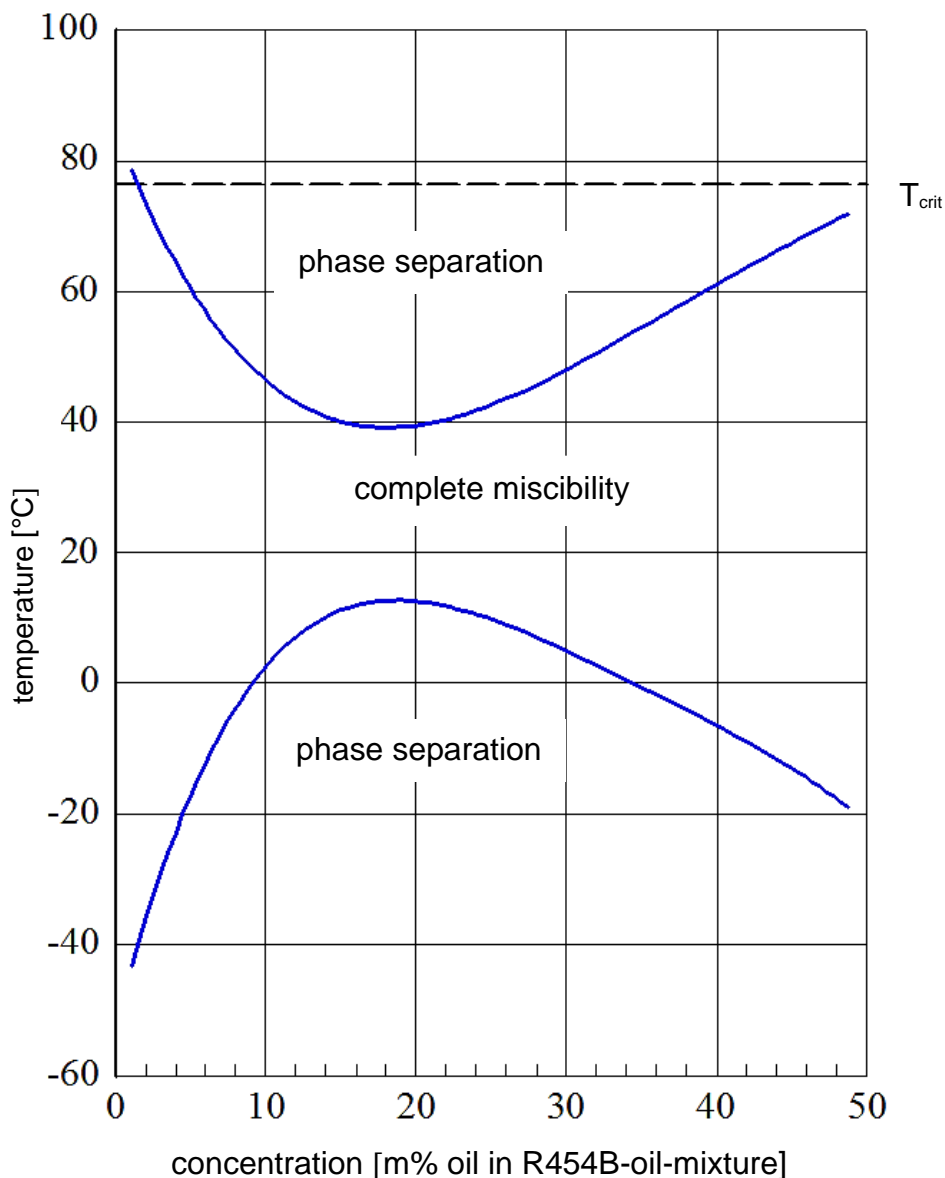

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R454C

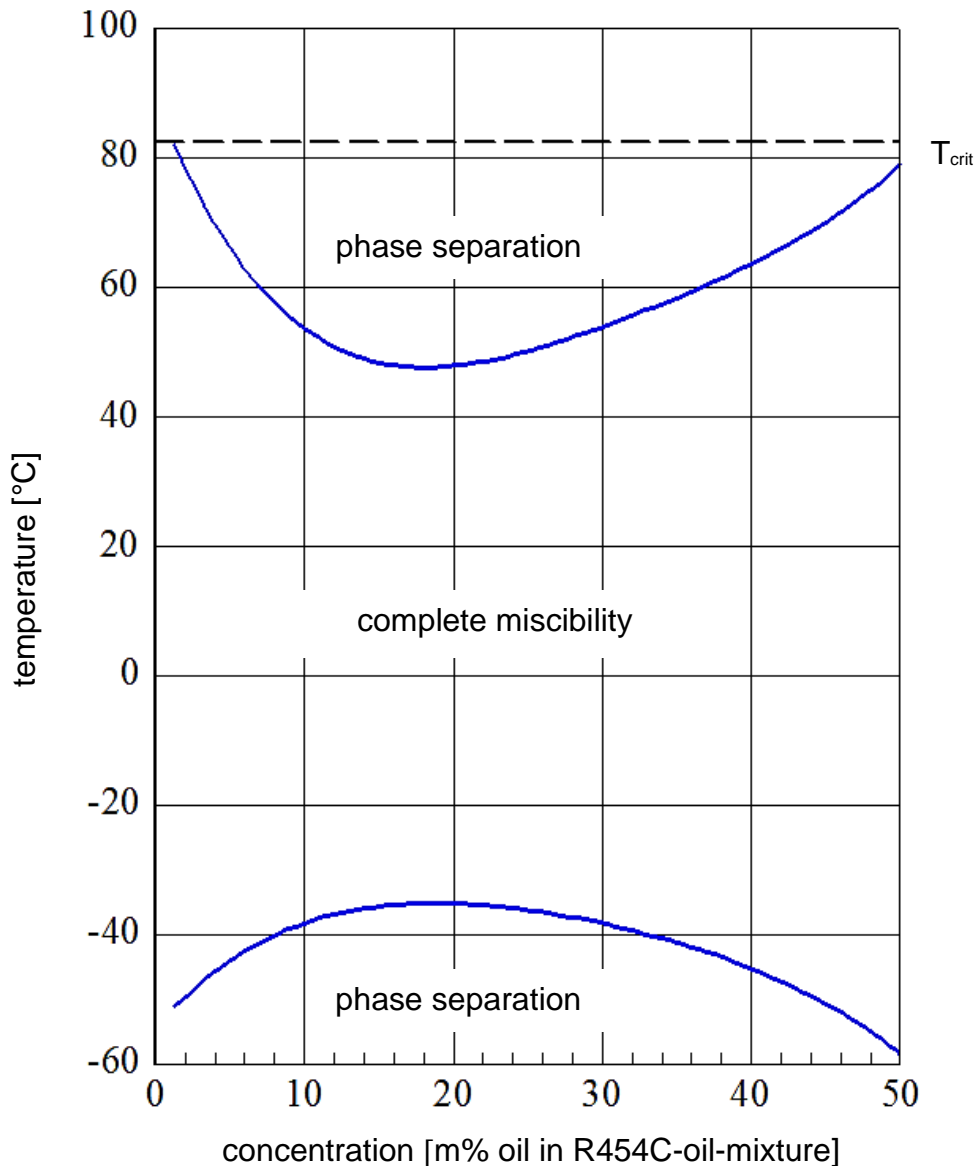

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R455A

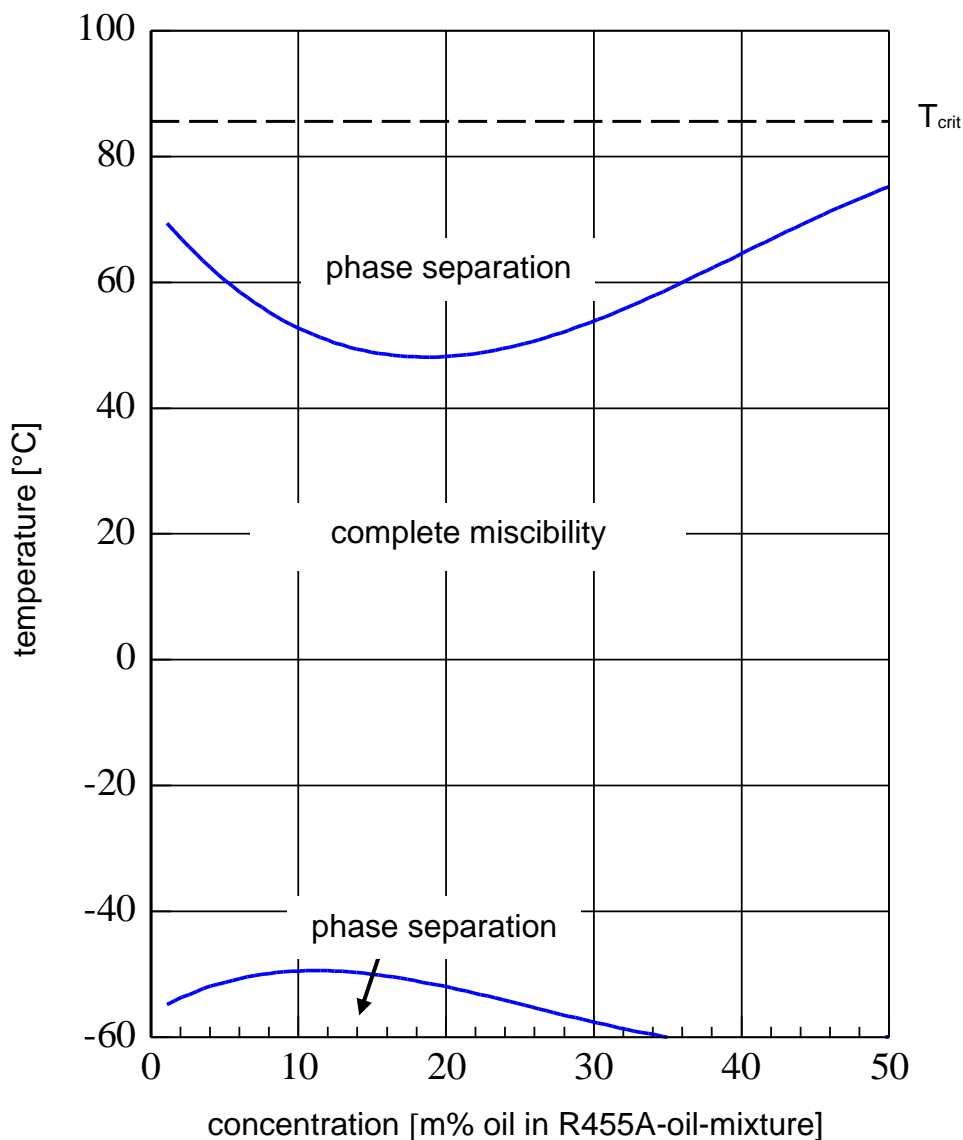

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R455A

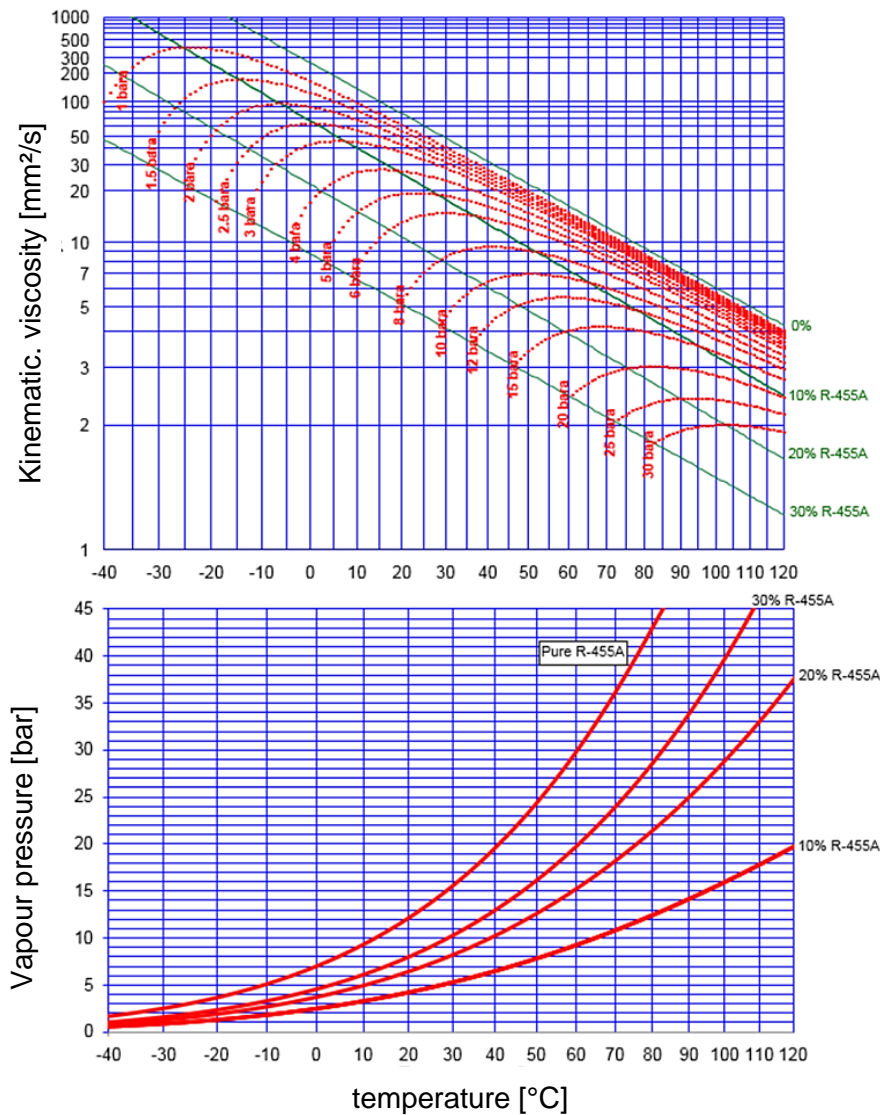


All percentages represent mass fractions of refrigerant in the refrigerant-oil-mixture.

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.


Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R507A

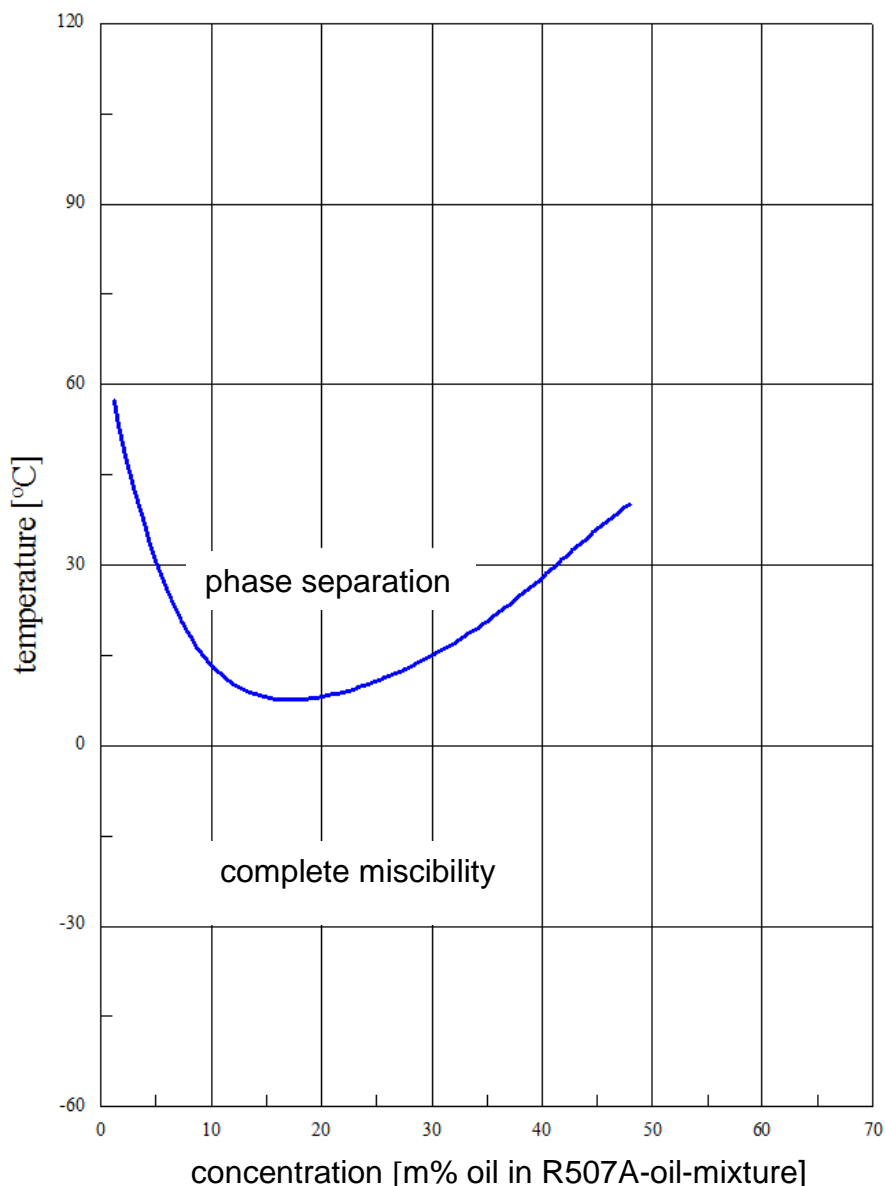

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R507A

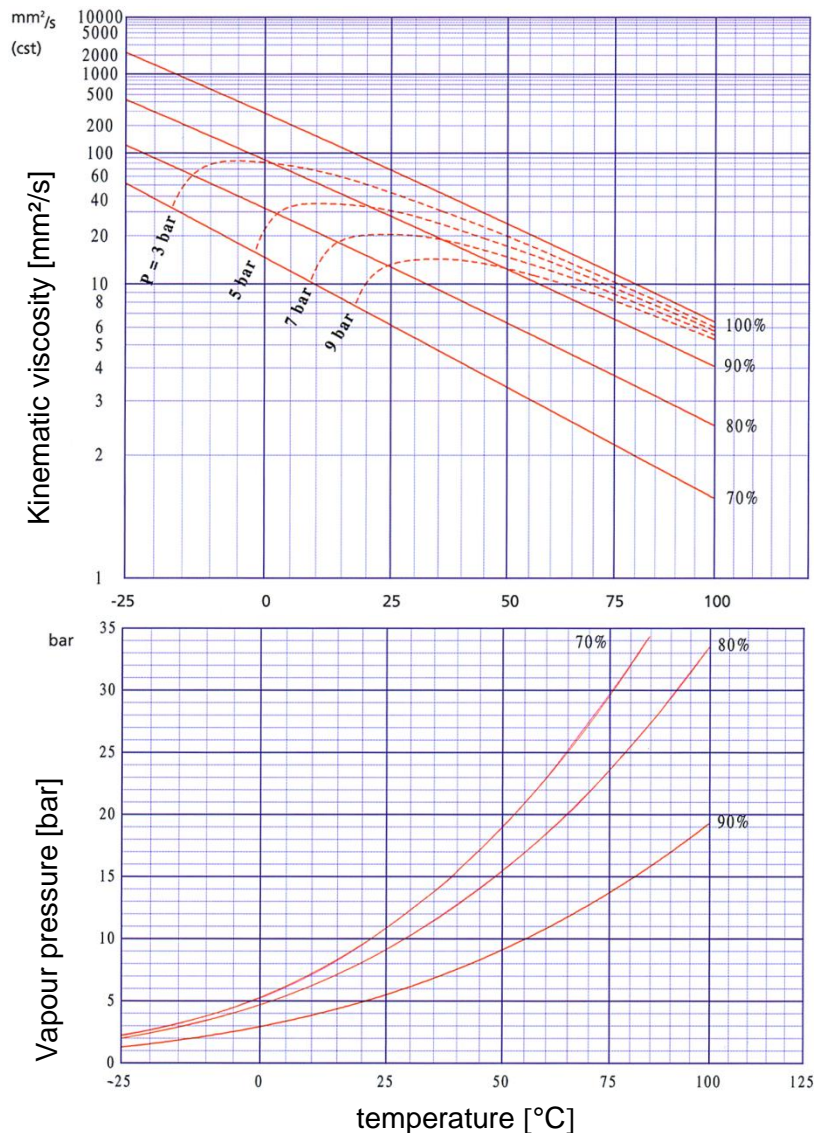


All % figures represent m% oil in the refrigerant-oil-mixture..

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.



Miscibility behaviour (miscibility gap): RENISO TRITON SEZ 32 and R513A

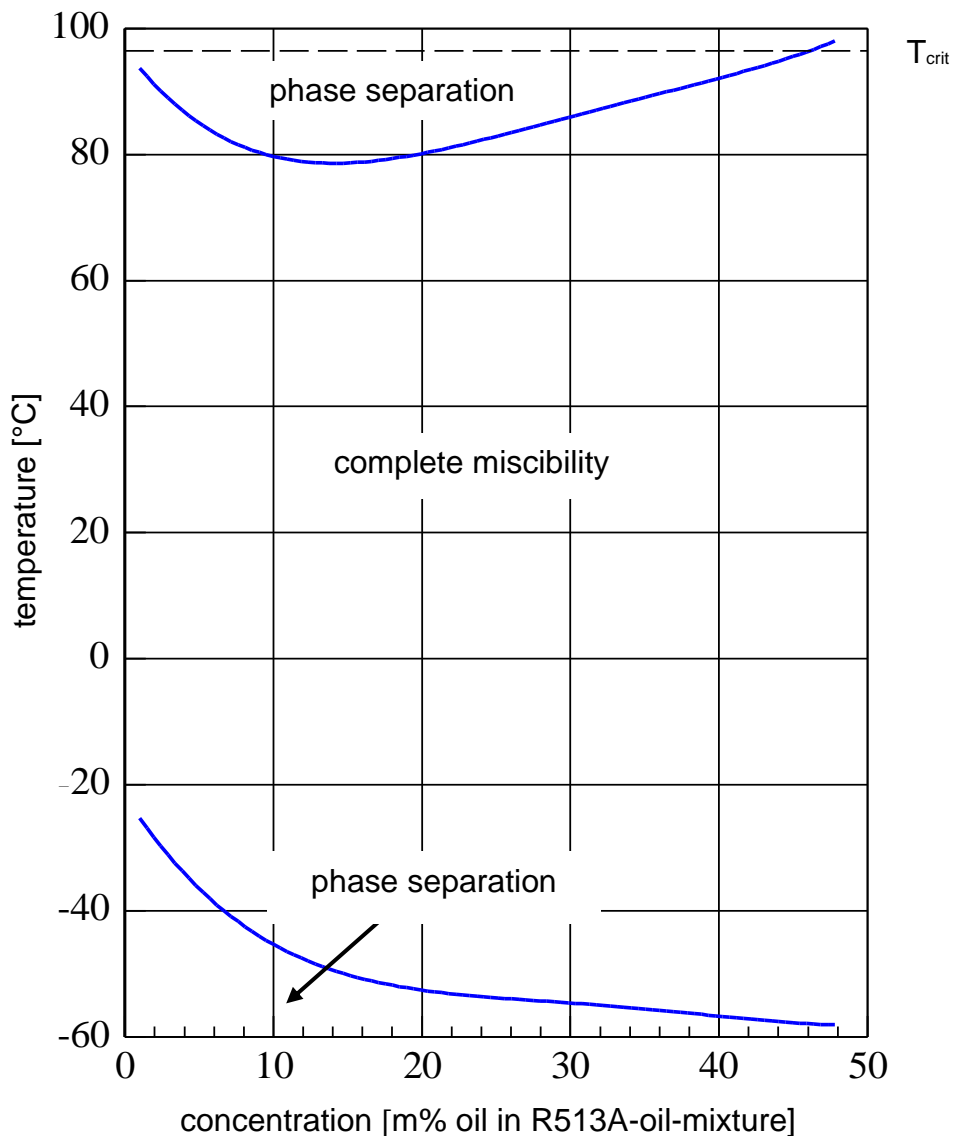

RENISO TRITON SEZ 32

Synthetic refrigeration oil based on polyol esters (POE) for HFC/FC and HFO refrigerants – including HFO/HFC refrigerant blends.

Kinematic viscosity and vapour pressure: RENISO TRITON SEZ 32 and R513A

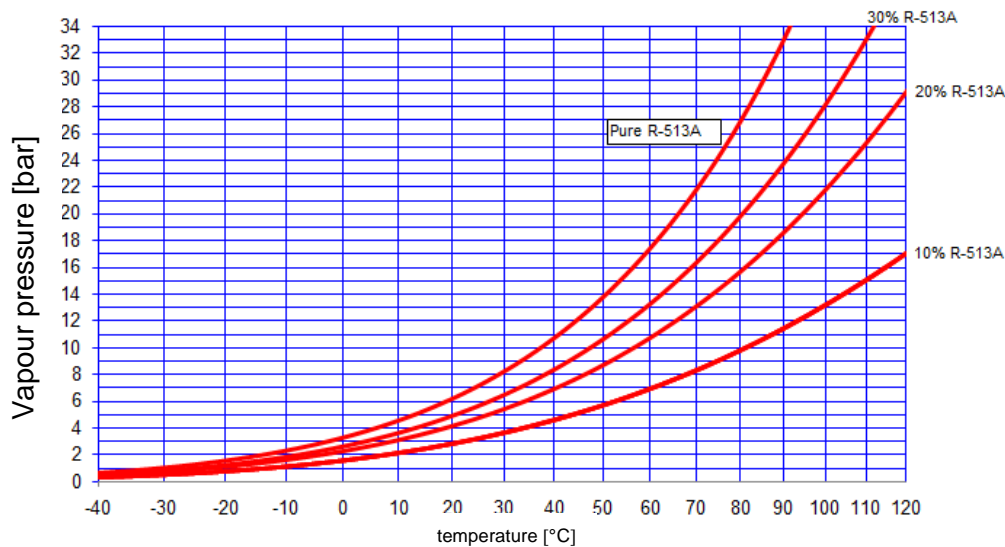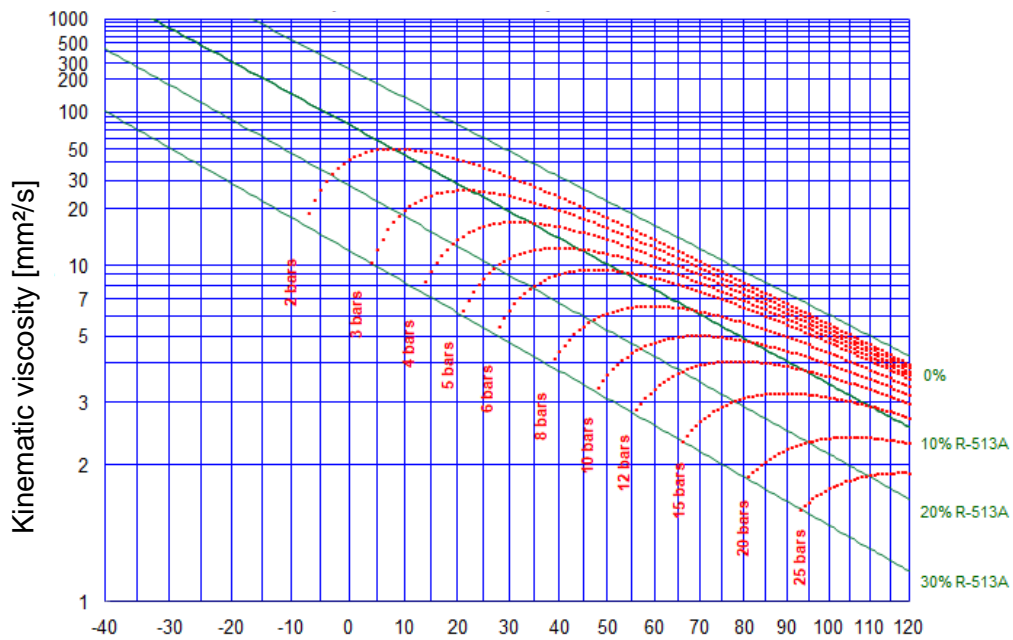

All % figures represent m% refrigerant in the refrigerant-oil-mixture.

PI 4-1326, Page 41; PM 4 - 09.20

The information contained in this product information is based on the experience and know-how of FUCHS SCHMIERSTOFFE GMBH in the development and manufacturing of lubricants and represents the current state-of-the-art. The performance of our products can be influenced by a series of factors, especially the specific use, the method of application, the operational environment, component pre-treatment, possible external contamination, etc. For this reason, universally-valid statements about the function of our products are not possible. Our products must not be used in aircrafts/spacecrafts or their components, unless such products are removed before the components are assembled into the aircraft/spacecraft. The information given in this product information represents general, non-binding guidelines. No warranty expressed or implied is given concerning the properties of the product or its suitability for any given application.

We therefore recommend that you consult a FUCHS SCHMIERSTOFFE GMBH application engineer to discuss application conditions and the performance criteria of the products before the product is used. It is the responsibility of the user to test the functional suitability of the product and to use it with the corresponding care.

Our products undergo continuous improvement. We therefore retain the right to change our product program, the products, and their manufacturing processes as well as all details of our product information sheets at any time and without warning, unless otherwise provided in customer-specific agreements. With the publication of this product information, all previous editions cease to be valid.

Any form of reproduction requires express prior written permission from FUCHS SCHMIERSTOFFE GMBH.

© FUCHS SCHMIERSTOFFE GMBH. All rights reserved.

Die Angaben in dieser Produktinformation beruhen auf den allgemeinen Erfahrungen und Kenntnissen der FUCHS SCHMIERSTOFFE GMBH in der Entwicklung und Herstellung von Schmierstoffen und entsprechen unserem heutigen Wissensstand. Die Wirkungsweise unserer Produkte ist von vielfältigen Faktoren abhängig, insbesondere vom konkreten Einsatzzweck, der Applikation der Produkte, den Betriebsbedingungen, der Bauteilvorbehandlung, eventuellem Schmutzanfall von außen, etc. Aus diesem Grund sind allgemeingültige Aussagen zur Funktion unserer Produkte nicht möglich. Unsere Produkte dürfen nicht in Flugzeugen oder Raumfahrzeugen verwendet werden. Zur Herstellung von Komponenten für Flugzeuge oder Raumfahrzeuge dürfen unsere Produkte verwendet werden, wenn sie vor der Montage in das Flugzeug oder Raumfahrzeug rückstandslos von den Komponenten entfernt werden. Die Angaben in dieser Produktinformation stellen allgemeine, nicht verbindliche Richtwerte dar. Keinesfalls beinhalten sie hingegen eine Zusicherung von Eigenschaften oder eine Garantie für die Eignung des Produkts für den Einzelfall.

Wir empfehlen daher, vor dem Einsatz unserer Produkte mit den Ansprechpartnern der FUCHS SCHMIERSTOFFE GMBH ein individuelles Beratungsgespräch über die Einsatzbedingungen in der Anwendung und die Leistungsmerkmale der Produkte zu führen. Dem Anwender obliegt es, die Produkte in der vorgesehenen Anwendung auf deren Funktionssicherheit zu testen und mit der gebotenen Sorgfalt einzusetzen.

Unsere Produkte werden kontinuierlich weiterentwickelt. Deshalb behalten wir uns das Recht vor, das Produktprogramm, die Produkte und deren Herstellungsprozesse sowie alle Angaben in dieser Produktinformation jederzeit und ohne Vorankündigung zu ändern, sofern keine kundenspezifischen Vereinbarungen existieren, die dem entgegenstehen. Alle früheren Veröffentlichungen verlieren mit Erscheinen dieser Produktinformation ihre Gültigkeit.

Vervielfältigungen jeder Art und Form bedürfen der vorherigen schriftlichen Genehmigung der FUCHS SCHMIERSTOFFE GMBH.

© FUCHS SCHMIERSTOFFE GMBH. Alle Rechte vorbehalten.