


FH065-HD_.6K.A7

Leistungsdaten Performance data

3~ 400V ±10% ΔΔ/YY/Δ 50Hz

P_1	0,68/0,41/0,12	kW
I	1,35/0,74/0,46	A
n	870/660/420	min ⁻¹
I_A	4,5/5,0/0,82	A
ΔI	0	%
$t_{R①}$	55	°C
$t_{R②}$	70	°C

Kennliniendaten Characteristic data

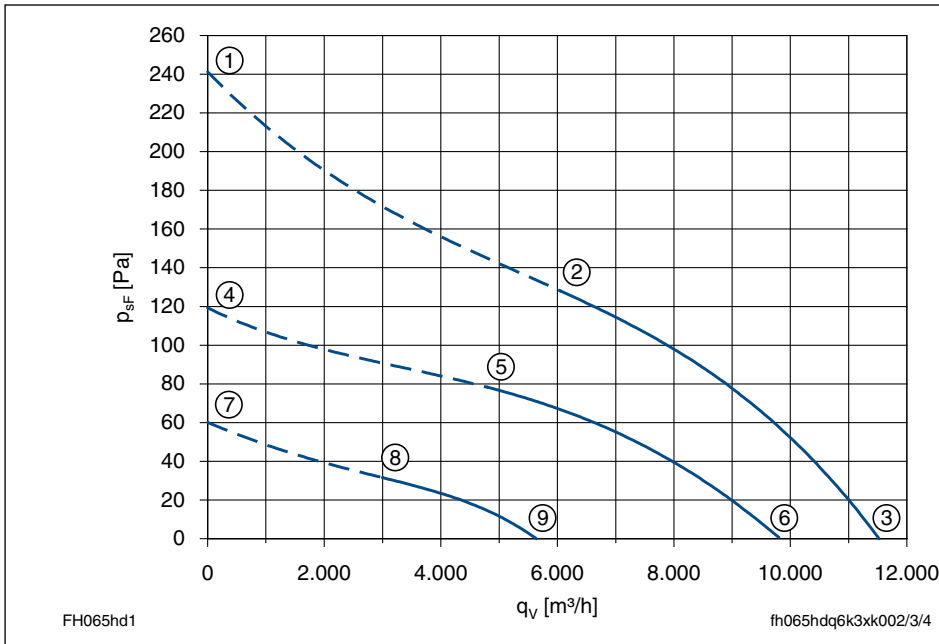

	U V	I A	P_1 W	n min ⁻¹
①		1,7	970	820
②	400	1,35	680	870
③	ΔΔ	1,15	500	930
④		0,95	560	580
⑤	400	0,74	410	660
⑥	YY	0,63	370	790
⑦		0,5	160	410
⑧	400	0,46	120	420
⑨	Δ	0,46	110	460

$$p_{d2} = 4,0 \cdot 10^{-7} \cdot q_v^2$$

gemessen in Volldüse ohne
Berührschutz in Einbauart A
nach ISO 5801
measured in full bell mouth without
guard grille in installation type A
according to ISO 5801

	①	②	③	④	⑤	⑥	⑦	⑧	⑨
L_{WA}									
dB		76	77		71	74		61	62

Maßblatt / Dimension sheet

Typ type	Artikel-Nr. article no.	Bauform design	Luftförderrichtung airflow direction	Gewicht weight	Anschlussschaltbild connection diagram	Maßblatt dimension sheet	Seite page
FH065.HDA.6K.A7	124 149	A	A	18,9 kg	170XB	L-KL-8742	3/2/4
FH065.HDD.6K.A7	123 675	D	A	23,4 kg	170XB	L-KL-8744	3/2/8
FH065.HDD.6K.A7	132 317	D	A	22,5 kg	170XB	L-KL-8744	3/2/8
FH065.HDW.6K.A7	135 740	W	A	23,5 kg	170XB	L-KL-8744	3/2/8