

Condensate Removal Pumps

VCMX SERIES

High Capacity Model



VCMX- 20ULS

Applications

- For removal of condensate from air conditioners, suitable for high efficiency gas furnace condensation and condensing boilers

Features

- Fully automatic: start, stop, safety switch
- Check valve outlet: 3/8" (9.5 mm), for 3/8" (9.5 mm) ID
- cCSAus listed
- Options: safety switch, 20' (6 m) of 3/8" (9.5 mm) tubing and anti-sweat sleeve
- 1/30 hp high performance motor

Series Specifications


Shut Off: 21" (4.8 mm)

Maximum Liquid Temperature:
140 °F (60 °C)

Electrical: 115 V, 60 Hz, 1.5A, 93 W
230 V, 50/60 Hz, 0.60A,
75 W

Operation: Automatic

Performance Curve

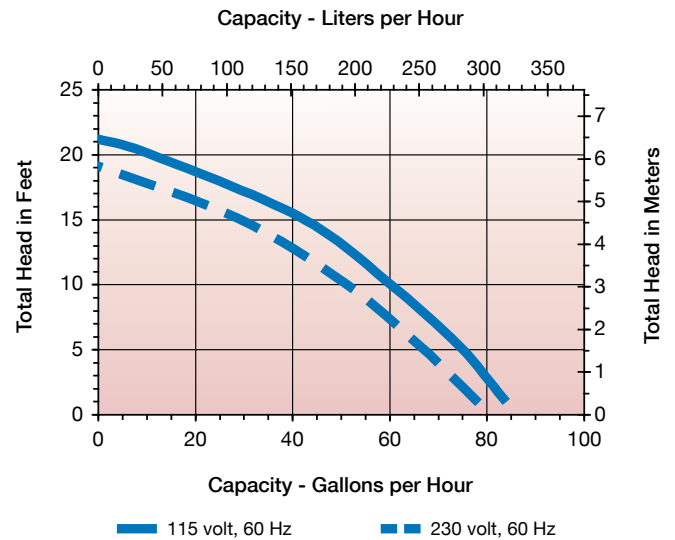

Model Characteristics

NXTGen

Item #	Model	Performance (GPH @ Height in Feet)					Shut Off (ft.)	Volts	Hertz	Amps	Watts	Cord (ft.)	Check Valve	Safety Switch	Dimensions (inches)			List/Cert.
		1	5	10	15	20									Height	Length	Width	
554520	VCMX-20UL	84	75	60	42	10	21	115	60	1.5	93	6	3/8"	No	6.5	10.2	4.8	cCSAus
554521	VCMX-20UL	80	69	54	36	0	20	230	50/60	0.6/0.5	75	6	3/8"	No	6.5	10.2	4.8	cCSAus
554530	VCMX-20ULS	84	75	60	42	10	21	115	60	1.5	93	6	3/8"	Yes	6.5	10.2	4.8	cCSAus
554531	VCMX-20ULS	80	69	54	36	0	20	230	50/60	0.6/0.5	75	6	3/8"	Yes	6.5	10.2	4.8	cCSAus

NXTGen With Tubing

Item #	Model	Performance (GPH @ Height in Feet)					Shut Off (ft.)	Volts	Hertz	Amps	Watts	Cord (ft.)	Check Valve	Safety Switch	Dimensions (inches)			List/Cert.
		1	5	10	15	20									Height	Length	Width	
554550	VCMX-20ULST	84	75	60	42	10	21	115	60	1.5	93	6	3/8"	Yes	6.5	10.2	4.8	cCSAus
554551	VCMX-20ULST	80	69	54	36	0	20	230	50/60	0.6/0.5	75	6	3/8"	Yes	6.5	10.2	4.8	cCSAus

NXTGen With Anti-Sweat Sleeve

Item #	Model	Performance (GPH @ Height in Feet)					Shut Off (ft.)	Volts	Hertz	Amps	Watts	Cord (ft.)	Check Valve	Safety Switch	Dimensions (inches)			List/Cert.
		1	5	10	15	20									Height	Length	Width	
554542	VCMX-20ULS-C	84	75	60	42	10	21	115	60	1.5	93	6	3/8"	Yes	6.8	10.3	5.1	cCSAus

VCMX SERIES

High Capacity Model continued

External Overflow Safety Switch		
Item #	Model	Description
599136	ACS-X10	Safety Switch with 10" Leads
599137	ACS-X72	Safety Switch with 72" Cable
Anti-Sweat Sleeve		
Item #	Model	Description
599138	VCMX-CK	Tank Sleeve with Mounting Bracket

VCMX
External Safety
Switch (optional)




**1/4-Turn
Check Valve:**
Allows servicing
without removal of
tubing, eliminating
water spills

Cooling Design:
Improved cooling
increases pump life

**Sleek and Stylish
Appearance:**
Performs as good
as it looks

**Optional External
Overflow
Safety Switch:**
Gives you the option
to connect air-handler
shutdown, or activate
an alarm or building
automation system

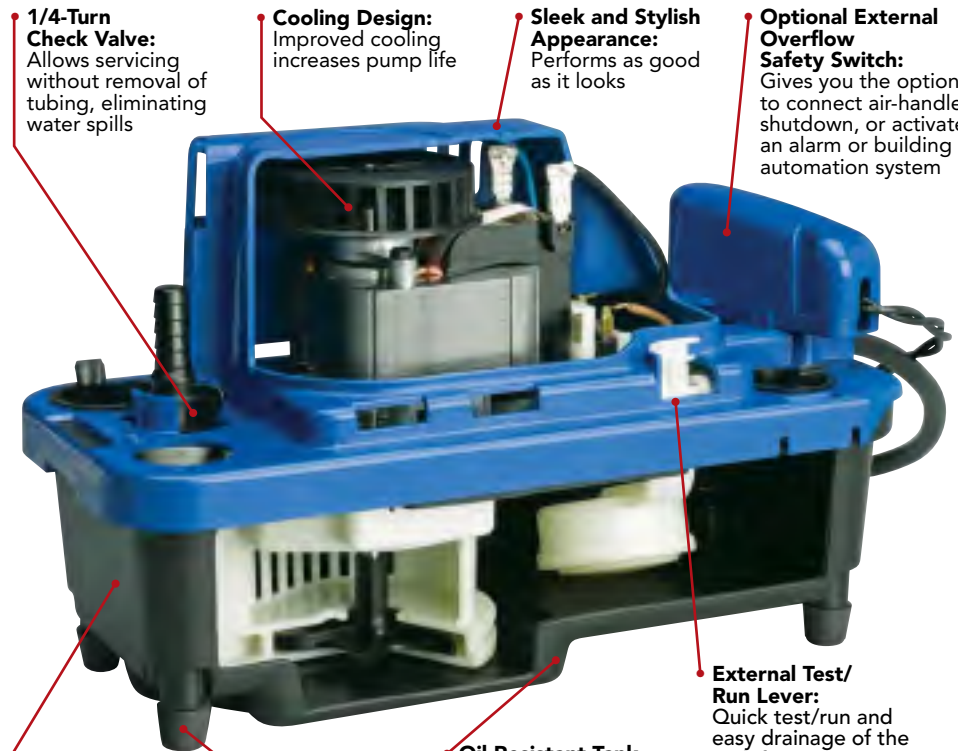

Slimmer Footprint:
6.5" x 10.2" x 4.8"
size offers flexibility
in tight spaces

Rubber Feet:
Absorb vibration
on hard surface
installations

**Oil-Resistant Tank
and Check Valve:**
Eliminate the problem
of cracked tanks with
exposure to oil

**External Test/
Run Lever:**
Quick test/run and
easy drainage of the
tank for servicing

