



AIR CONDITIONING



REFRIGERATION



HEATING



EN

MAX Hi-Flow

CONDENSATE REMOVAL PUMP

The best in class Max Hi-Flow tank pump carries on the Aspen Pumps tradition of build quality & high performance. With the lowest dB(A) rating & best IP rating (IP24 splash proof) of any tank pump, the Max Hi-Flow is the quietest & safest pump in its class.



550 L/h max. flow



5m max. rec. head (flow rate 55L/h)

KEY FEATURES



- IP24 - Splash proof
- Easy access tank
- Built in spirit level
- Plug & play

SUITABILITY


- Up to 733kW / 2.5m Btu/h
- Ducted units; Floor standing & Chassis units; Cassette units



1.65 kg

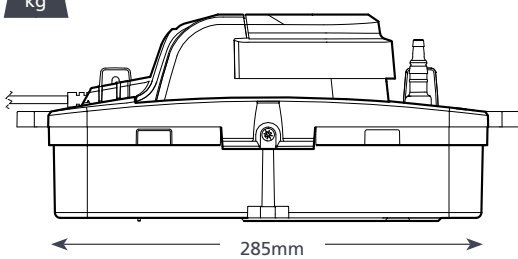

Non-return valve can be cut from 6mm to 10mm (see graphs below)





TANK PUMP OPTIONS

MAX Hi-Flow

FP3349

TANK PUMP SPECIFICATIONS

| | |
|--------------------|---------------------|
| Max. flow | 550L/h @ 0 head |
| Max. rec. head | 5m |
| Tank capacity | 1.7L |
| Sound level@1m | 44 dB(A) |
| Power supply | 230 VAC, 0.8A, 50Hz |
| Rated | Non Continuous |
| Class | I appliance |
| Max. unit output | 733kW / 2.5m Btu/h |
| Max. water temp | 40°C / 104°F |
| Inlets | x4 21-27mm |
| Outlets | 6mm & 10mm |
| IP Protection | IP24 |
| Safety switch | 3A Normally closed |
| Thermal protection | ✓ |
| Fully potted | n/a |
| Self priming | n/a |

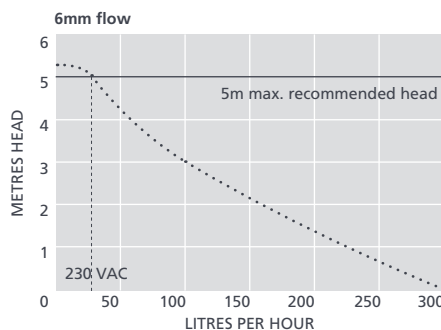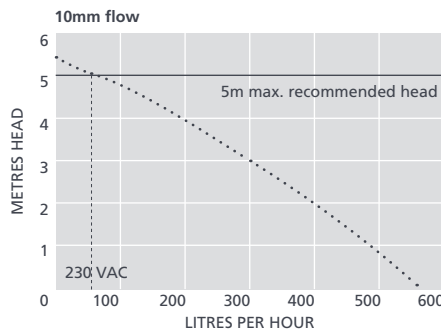

SUGGESTED XTRA ACCESSORIES

| Description | Part No. |
|------------------------|----------|
| Rubber adaptor | FP2013 |
| Rigid pipe 15mm / 3/4" | B7501 |
| Hose to waste | FP2038 |



For more installation accessories take a look at our Aspen Xtra range

IN THE BOX

Max Hi-Flow tank pump • Plug & Play power cable • Fixing kit incl. rod mount and wall mount clips • Install manual

Download manual at aspenpumps.com

View install video at aspenpumps.com

Information correct at time of going to press.

