



Electronic Expansion Valve

T/S series electronic expansion valves are designed for use in air conditioning and refrigeration systems or in heat pumps. The valve controls the automatic adjustment of refrigerant flow rate and makes the system work under optimized conditions for the purpose of fast cooling or heating, precise temperature control and energy saving. The valve can also be used e.g. for suction line pressure controls. These valves provide bidirectional operation to control the refrigerant flow rate in heating or cooling mode.



FEATURES

- APPLICABLE FOR OIL-FREE SYSTEM (T SERIES)
- SMALLER INSTALLATION SPACE: LOW HEIGHT, SMALL VOLUME, LIGHT WEIGHT
- OPTIMIZED FLOW PATH DESIGN FOR NOISE REDUCTION
- FAST OPERATION, ENERGY SAVING
- APPLICABLE FOR REVERSIBLE SYSTEMS LIKE HEAT PUMPS: BIDIRECTIONAL FLOW

GENERAL SPECIFICATIONS

- Applicable for all common HCFC and HFC refrigerants such as: R22, R134a, R404A, R407C, R410A, R507A ...
- Cooling capacity: 3,5 to 105 kW (R22 nominal capacity)
- 500 steps (full stroke); 32 ± 20 opening steps
- Medium temperature TS min./max.: -30°C / +70°C (duty cycle rate below 50%)
- Ambient temperature min./max.: -30°C / +60°C (duty cycle rate below 50%)
- Relative humidity: : 0 to 95% RH
- Installation position: :
 - Coil installed in the upwards position, valve rotor central axis within ±15° versus vertical axis
 - Inlet connection preferably sidewise, outlet preferably downwards
- Certifications: UL/CSA and declaration according to LVD or PED





SANHUA DPF-T/S SERIES Electronic Expansion Valve

ELECTRICAL PARAMETERS

- Rated voltage: 12V DC ($\pm 10\%$), rectangular wave
- Actuating mode: 4-phase 8-step permanent magnet stepping motor of direct-acting type
- Excitation mode: 1 ~ 2 phase excitation, monopole actuation
- Excitation rate:
 - Seat \varnothing 1,3 to 3,2 mm: 30 to 90pps
 - Seat \varnothing 4,0 to 6,5 mm: 30 to 40pps
- Activation of self-holding mechanism: Maintain excitation in stop position min. 0,1~1,0 sec.
- Min. motion time from completely open to completely closed:
 - Seat \varnothing 1,3 to 3,2 mm: 6s @ 90pps
 - Seat \varnothing 4,0 to 6,5 mm: 13s @ 40pps
- Coil current:
 - Seat \varnothing 1,3 to 3,2 mm: 260mA/phase (20°C)
 - Seat \varnothing 4,0 to 6,5 mm: 375mA/phase (20°C)
- Coil resistance:
 - Seat \varnothing 1,3 to 3,2 mm: $46 \pm 3.7 \Omega$ /phase (20°C)
 - Seat \varnothing 4,0 to 6,5 mm: $32 \pm 3.2 \Omega$ /phase (20°C)
- Insulation class of coil: E
- Protection class: IP 67

GENERAL CHARACTERISTICS

Valve Model	Part Number ¹⁾	Seat ϕ (mm)	Kv (m ³ /h)	Nominal Cooling Capacity ²⁾ [kW]					MOP Max. Oper. Press. [MPa]	MOPD Direct [MPa]	MOPD Rev. (MPa)
				R22	R134a	R407C ³⁾	R404A R507A	R410A			
DPF(T01)1.3C-07	DPF-09001	1,3	0,05	4,7	3,6	4,8	3,3	5,5	4,5	3,5	≥ 2.1
DPF(T01)1.65C-05	DPF-09002	1,65	0,08	7,8	6,0	8,0	5,5	9,1			
DPF(T01)1.8C-08	DPF-09003	1,8	0,1	9,4	7,2	9,7	6,6	11			
DPF(T01)2.0C-03	DPF-09004	2	0,16	11,5	8,9	11,8	8,1	13,5			
DPF(T01)2.2C-01	DPF-09005	2,2	0,2	15	11,6	15,5	10,5	17,6			
DPF(T01)2.4C-01	DPF-09006	2,4	0,23	20,7	15,9	21,3	14,5	24,2			
DPF(TS1)3.0C-01	DPF-09007	3	0,39	30,8	23,7	31,7	21,6	36			≥ 1.5
DPF(TS1)3.2C-01	DPF-09008	3,2	0,43	36,3	28	37,4	25,4	42,5			
DPF(S03)4.0C-01	DPF-09010	4	0,5	42	32,3	42	29,4	50,4			
DPF(S03)4.5C-01	DPF-09011	4,5	0,7	53	40,4	52,5	36,8	63			≥ 0.7
DPF(S03)5.5C-01	DPF-09012	5,5	0,9	70	53,9	70	49,0	84			
DPF(S03)6.5C-02	DPF-09013	6,5	1,1	105	80,9	105	73,5	126			


- Note:**
- 1) Extent of delivery without coil
 - 2) Nominal working conditions: Condensing Temperature 38°C; Evaporating Temperature 5°C; Sub-cooling 0K; Superheat 0K
 - 3) Nominal capacity is got at 480 fully open pulses of linear flow curve






SANHUA DPF-T/S SERIES Electronic Expansion Valve

FLOW CHARACTERISTIC

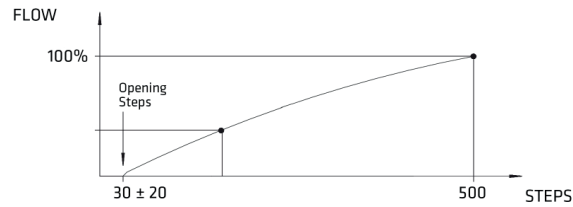

DIMENSIONS

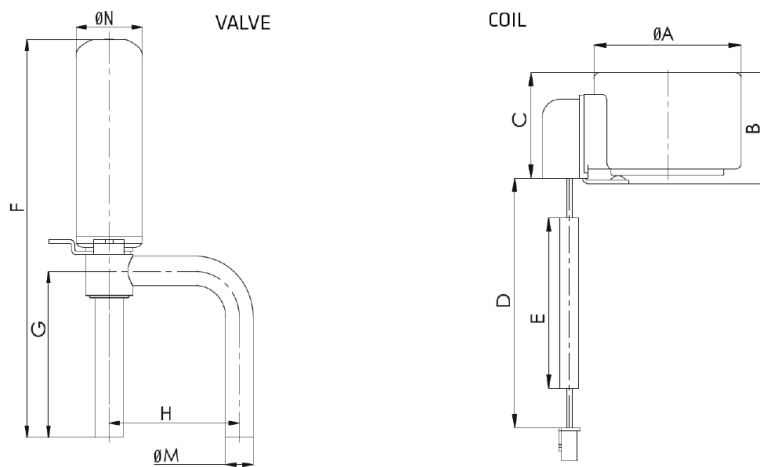

Valve Model	Coil Series	Valve Dimensions [mm]				
		F	G	H	Ød	ØN
DPF(T01)1.3C-07 to DPF(T01)2.4C-01	PQ-M10	78	36	30	6,35	17,35
DPF(TS1)3.0C-01 to DPF(TS1)3.2C-01		82	40	30	7,94	17,35
DPF(S03)4.0C-01 to DPF(S03)6.5C-02	PQ-M03	148	64,7	63,4	15,88	35,3

Valve Model	Coil Model	Coil Dimensions [mm]					Coil Product Number
		ØA	B	C	D	E	
DPF(T01)1.3C-07 to DPF(TS1)3.2C-01	PQ-M10 012-000277	38,5	26,4	25,6	700	600	DPF-58013
DPF(S03)4.0C-01 to DPF(S03)6.5C-02	PQ-M03 012-000001	67,5	42,4	33	700	600	DPF-58002

