Alternating Current

For ordering the correct Liquid Stirrers,
The following code has to be used:

A	A	A				-	S	A				-	V o l t	H z
1	1	1	2	2	3				4	4	4		5	6

1 - AAA
2 - Code for stack height: "20" or "40".
3 - Bearing type: "B" for sleeve bearings: "C" for ball bearings.
4 - Coil code (see table, column 3).
5 - Rated voltage.
6 - Rated frequency.

AAA

61
27.5
83 17
45
A
B
H
8.5
M4
C

Overprinted bobbin

Protection
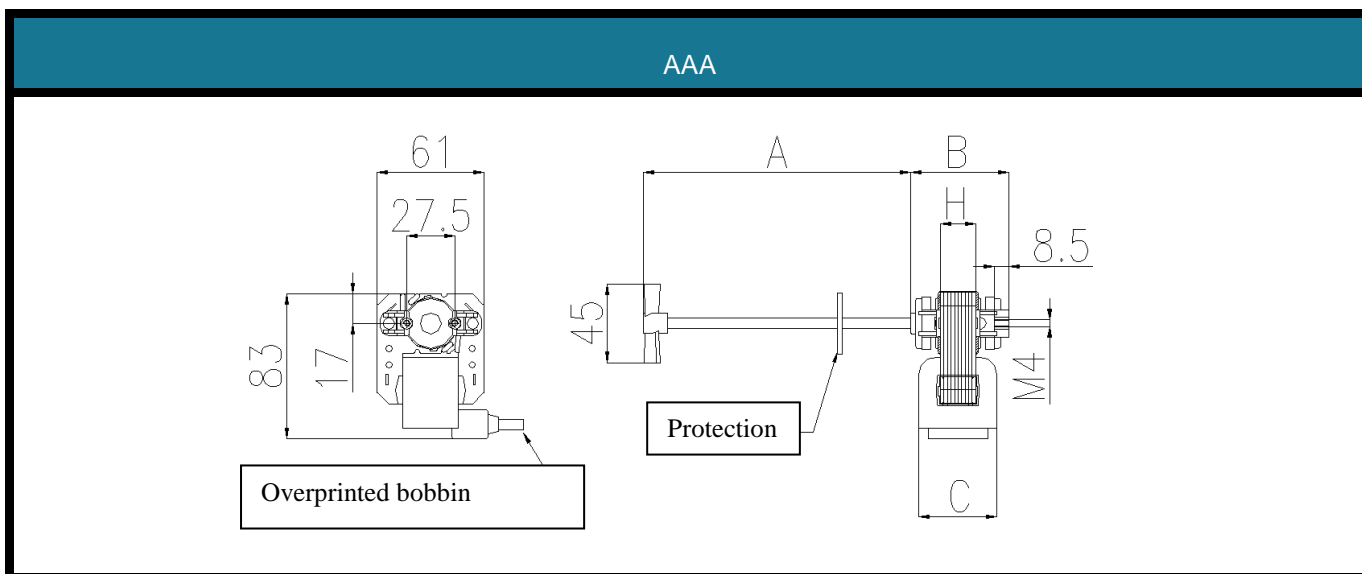
TYPE	MOTOR STACK h	COIL SA=plastic coating	DIMENSIONS			INPUT	
			A	B	C	A	W
	mm	Code	mm	mm	mm		
AAA 20	20	007	153	56	45	0,17	20
AAA 40	40	006	138	76	65	0,27	32