

Accessories | Aksesuarlar

Type		Supply Voltage	Max. Operating Pressure (bar)	Compressor connection	Weight incl. Coil (g) (except adaptor)	
COM1	COM2				COM1	COM2
COM1-230/Base Unit	COM2-230/Base Unit	230 VAC 50 Hz	COM1: 60 bar COM2: 120 bar	/.	560	630
COM1-230/118-18	COM2-230/118-18			1-1/8"-18 UNEF	635	705
COM1-230/000	COM2-230/000			3-4 holes	680	750
COM1-230/114	-			Rotalock 1-1/4"	665	-

Accessories | Aksesuarlar

Type	Connection	Weight (g)	Max. Operating Pressure (bar)
COM-AD-118-18	1-1/8"-18 UNEF	75	120 bar
COM-AD-000	3-4 holes	125	
COM-AD-114	Rotalock 1-1/4"	105	

Cables with Connector | Fişli Kablo Bağlantısı

Type	Voltage	Length	Temperature Range (static)	Application	Weight (g)
COM-P300	24 and 230 VAC	3,0 m	-40...80°C	Power Supply	150
COM-S300	230 VAC	3,0 m		Relais	130



COM-AD-000




COM-AD-114



COM-AD-118-18

Dimension COM1/2 | Ölçüler COM1/2 (mm)

Type	Installed A (mm)	Adapter Depth B (mm)
COM1-230/118-18	85	23
COM1-230/000	101	40
COM1-230/114	96	35

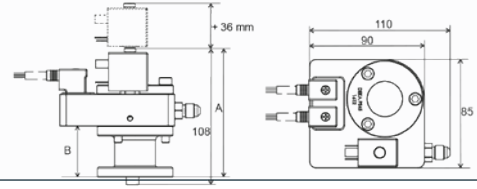

Brand	Model	Type of Adapter
Selection of COM1 (60 bar) COM1 Seçimi (60 bar)		
Bitzer	4VC, 4TC, 4PC, 4NC, 4J, 4H, 4G, 6J, 6H, 6G, 6F, 8GC, 8FC, 4VHC-10K, 4THC-12K, 4PHC-15K, 4NHC-20K, 4VSL-15K...4NSL-30K Ecoline: 4VES-7Y...4NES-20(Y), 4VE-7Y...4NE-20(Y), 4JE-13Y...4FE-35(Y)	COM-AD-000
	2KC, 2JC, 2HC, 2GC, 2FC, 2EC, 2DC, 2CC, 4FC, 4EC, 4DC, 4CC2KHC, 2JHC, 2HHC, 2GHC, 2FHC, 2EHC, 2DHC, 2CHC, 4FHC, 4EHC, 4DHC, 4CHC, 2MSL-07K...4CSL-12K Ecoline: 2KES-05(Y)...2FES-3(Y), 2EES-2(Y)...2CES-4(Y), 4FES-3(Y)...4CES-9(Y)	COM-AD-118-18
Bock	HA, HG, O-Series, HGX4/310-4, 385-4, 464-4, 555-4 (CO2)	COM-AD-000
	HA12/22/34, HG12/22/34 HGX12P/40-4, 50-4, 60-4, 75-4 (CO2) HGX22P110-4, HGX22P125-4, HGX22P160-4, HGX22P190-4 (CO2), HGX34P/215-4, HGX34P/255-4 (CO2)	COM-AD-118-18
Copeland	D2, D3, D4, D6, D9, 4CC, 6CC, ZBH, 4M, 6M	COM-AD-000
	ZB15...ZB57, ZB(D)66...ZB(D)114, ZF06...ZF18, ZF25...ZF54, ZS21...ZS45, ZO21...ZO104	COM-AD-114
Dorin	all KP, K Models (except those under COM-AD-118-18) SCC 500B, 750B, 1500B, 1900B, 2000B, 2500B, H41, H5, H6, H7, SCC_1, SCC_32, SCC_4, CDSW_35, CDS_41	COM-AD-000
Frascold	Series A, B, D, F, S, V, Z Series A-SK, D-SK, F-SK, Q-SK, S-SK	COM-AD-000

Selection of COM2 (120 bar) | COM2 Seçimi (120 bar)

Bitzer	2MTE-4K...6CTE-50K, 4PTEU-6LK...6CTEU-50LK, 4PTE-7.F3K, 4MTE-10.F4K, 4KTE-10.F4K	COM-AD-118-18
Bock	HGX34 CO2T, HGX46 CO2T	COM-AD-118-18
Copeland	4MSL, 4MTL	COM-AD-118-18
Frascold	S8-8TK...S30-26TK	COM-AD-118-18

Selection COM1 for R290, R1270 Compressors (60bar) | R290, R1270 Kompresörler için COM1 Seçimi (60 bar)

Bitzer	Ecoline: 2KESP-05(Y)...2FESP-3(Y), 2EESP-2(Y)...2CESP-4(Y), 4FESP-3(Y)...4CESP-9(Y)	COM-AD-118-18
	Ecoline: 4VES-7Y...4NES-20(Y), 4VEP-7Y...4NEP-20(Y), 4JEP-13Y...4FEP-35(Y)	COM-AD-000
Frascold	Serie A, B, D, Q, S, V, Z, W	COM-AD-000
Panasonic	3CC149LA0M, 2CC171LA0M, 3CC171LA0M, 2CC205SA0M, 3CC205LA0M	COM-AD-000