


50Hz

6DL-270X 6DL3F93KE FSD-200

R404A

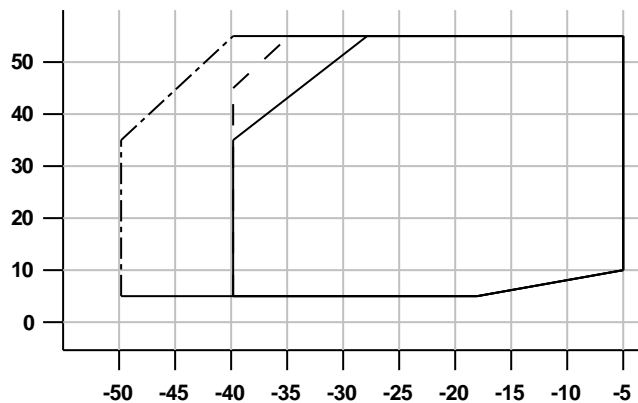

Minimum evaporating temp. with:  
 ——— 25°C Suction Gas Return  
 - - - 0°C Suction Gas Return  
 - · - · 0°C Suction Gas Return + Fan

Suction Return Temperature 20.0°C

Evaporating Temperature °C

Liquid subcooling 0.0K

Cond °C	Capacity kW									
	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5
5			23.90	31.20	40.20	51.10	63.80			
10			22.60	29.60	38.20	48.50	60.50	74.60	90.70	109.00
20			19.95	26.30	33.90	43.00	53.80	66.30	80.60	97.00
30			17.10	22.70	29.50	37.40	46.80	57.70	70.30	84.70
35			15.65	20.90	27.10	34.60	43.30	53.40	65.10	78.40
40				19.05	24.80	31.60	39.70	49.00	59.80	72.10
45					22.40	28.70	36.00	44.50	54.40	65.80
50					20.10	25.70	32.30	40.10	49.00	59.40
55						22.70	28.60	35.60	43.60	53.00
	Power Input kW									
	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5
5			8.92	9.88	10.70	11.40	11.90			
10			9.49	10.60	11.60	12.45	13.10	13.60	13.80	13.80
20			10.45	11.85	13.20	14.45	15.50	16.40	17.10	17.55
30			11.10	12.85	14.60	16.25	17.75	19.10	20.30	21.30
35			11.25	13.25	15.20	17.05	18.80	20.40	21.90	23.10
40				13.55	15.70	17.80	19.80	21.70	23.40	24.90
45					16.10	18.45	20.70	22.80	24.90	26.70
50					16.40	19.00	21.50	24.00	26.30	28.40
55						19.45	22.30	25.00	27.60	30.10
	Current 400V, A									
	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5
5			20.96	22.01	22.96	23.74	24.28			
10			21.53	22.76	23.92	24.93	25.75	26.30	26.51	26.34
20			22.57	24.20	25.81	27.36	28.77	29.97	30.91	31.52
30			23.32	25.42	27.57	29.71	31.78	33.71	35.44	36.90
35			23.55	25.90	28.35	30.81	33.24	35.55	37.70	39.62
40				26.28	29.03	31.84	34.63	37.36	39.94	42.32
45					29.60	32.77	35.95	39.10	42.14	45.01
50					30.04	33.58	37.18	40.76	44.27	47.64
55						34.26	38.28	42.32	46.32	50.21
	Mass Flow g/s									
	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5
5			128.00	168.00	218.00	277.00	348.00			
10			126.50	166.00	215.00	274.00	344.00	426.00	522.00	632.00
20			121.50	160.00	208.00	265.00	333.00	413.00	506.00	614.00
30			115.00	153.00	199.00	254.00	320.00	397.00	488.00	594.00
35			111.00	148.50	194.00	248.00	312.00	388.00	478.00	582.00
40				143.50	188.00	241.00	304.00	379.00	467.00	570.00
45					182.00	234.00	296.00	369.00	455.00	557.00
50					175.00	226.00	287.00	358.00	443.00	544.00
55						218.00	277.00	347.00	431.00	531.00

**DWM Copeland - Compressor - Refrigeration - Discus**

**COMPRESSOR MECHANICAL AND PHYSICAL DATA**

Number of cylinders	6
Displacement @ 50 Hz, cu.m/h	106
Bore/Stroke, mm	68.3/55.6
Length/Width, mm	740/580
Height, mm	490
Net Weight, kg	242
Gross Weight, kg	258
Rotalock Discharge, inch	1 3/8
Suction, inch	2 1/8
Oil Quantity, l	3.3
Frequency Range, Hz	25 - 60
Base mounting (hole dia), mm	381 x 305 (18.0)
Sound Pressure @ 1m, dBA	79.6
Sound Power, dBA	90.6
High Side PS, bar(g)	28
Low Side PS, bar(g)	22.5

**COMPRESSOR ELECTRICAL DATA (380/420V - 3~ - 50Hz)**

Maximum Operating Current, A	53.7
Locked Rotor Current, A	199
Default Enclosure Class	IP 54 (IEC 34)

**ACCESSORIES INCLUDED**

Oil Pressure Switch	OPS2 Sensor
Mounting Springs	4

**ACCESSORIES OPTIONAL**

Additional Cooling	70W Vertical Air Flow Fan
Capacity Control	Capacity Steps 66%
Crankcase Heater	100W Internal
Enclosure Class	IP 56
Oil Pressure Switch	OPS2 Electronic Switch
Unloaded start	Available
Deep Oil Sump	Mounted
Adapter Kit	For Parallel Operation
Check Valve (NRV)	For unloaded start operation
Inverter	Control Techniques SK 4403

**MOTOR OPTIONS**

Power Supply	Nominal Voltage	Motor Code	Start Connection	DOL Connection	Amps Factor
380-420 V/3~/50H	400	AWM	YY/Y	Y	1.00
220-240 V/3~/50H	230	EWL	Y/DELTA	DELTA	1.73
380-420 V/3~/50H	400	EWL		Y	1.00
380-420 V/3~/50H	400	EWM	Y/DELTA	DELTA	1.00
220-240 V/3~/50H	230	AWR	YY/Y	Y	1.73
500-550 V/3~/50H	525	AWY	YY/Y	Y	0.76
220-240 V/3~/60H	230	EWK	Y/DELTA	DELTA	2.09
380-420 V/3~/60H	380	EWK		Y	1.26
440-480 V/3~/60H	460	EWD	Y/DELTA	DELTA	1.00
208-230 V/3~/60H	230	AWC	YY/Y	Y	2.19
380 V/3~/60Hz	380	AWX	YY/Y	Y	1.26
440-480 V/3~/60H	460	AWD	YY/Y	Y	1.00